

KBox A-150-APL

Doc. Rev. 1.0

Doc. ID: 1062-3589

This page has been intentionally left blank

KBOX A-150-APL - USER GUIDE

Disclaimer

Kontron would like to point out that the information contained in this user guide may be subject to alteration, particularly as a result of the constant upgrading of Kontron products. This document does not entail any guarantee on the part of Kontron with respect to technical processes described in the user guide or any product characteristics set out in the user guide. Kontron assumes no responsibility or liability for the use of the described product(s), conveys no license or title under any patent, copyright or mask work rights to these products and makes no representations or warranties that these products are free from patent, copyright or mask work right infringement unless otherwise specified. Applications that are described in this user guide are for illustration purposes only. Kontron makes no representation or warranty that such application will be suitable for the specified use without further testing or modification. Kontron expressly informs the user that this user guide only contains a general description of processes and instructions which may not be applicable in every individual case. In cases of doubt, please contact Kontron.

This user guide is protected by copyright. All rights are reserved by Kontron. No part of this document may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language or computer language, in any form or by any means (electronic, mechanical, photocopying, recording, or otherwise), without the express written permission of Kontron. Kontron points out that the information contained in this user guide is constantly being updated in line with the technical alterations and improvements made by Kontron to the products and thus this user guide only reflects the technical status of the products by Kontron at the time of publishing.

Brand and product names are trademarks or registered trademarks of their respective owners.

©2018 by Kontron S&T AG

Kontron S&T AG

Lise-Meitner-Str. 3-5 86156 Augsburg Germany www.kontron.com

Intended Use

THIS DEVICE AND ASSOCIATED SOFTWARE ARE NOT DESIGNED, MANUFACTURED OR INTENDED FOR USE OR RESALE FOR THE OPERATION OF NUCLEAR FACILITIES, THE NAVIGATION, CONTROL OR COMMUNICATION SYSTEMS FOR AIRCRAFT OR OTHER TRANSPORTATION, AIR TRAFFIC CONTROL, LIFE SUPPORT OR LIFE SUSTAINING APPLICATIONS, WEAPONS SYSTEMS, OR ANY OTHER APPLICATION IN A HAZARDOUS ENVIRONMENT, OR REQUIRING FAIL-SAFE PERFORMANCE, OR IN WHICH THE FAILURE OF PRODUCTS COULD LEAD DIRECTLY TO DEATH, PERSONAL INJURY, OR SEVERE PHYSICAL OR ENVIRONMENTAL DAMAGE (COLLECTIVELY, "HIGH RISK APPLICATIONS").

You understand and agree that your use of Kontron devices as a component in High Risk Applications is entirely at your risk. To minimize the risks associated with your products and applications, you should provide adequate design and operating safeguards. You are solely responsible for compliance with all legal, regulatory, safety, and security related requirements concerning your products. You are responsible to ensure that your systems (and any Kontron hardware or software components incorporated in your systems) meet all applicable requirements. Unless otherwise stated in the product documentation, the Kontron device is not provided with error-tolerance capabilities and cannot therefore be deemed as being engineered, manufactured or setup to be compliant for implementation or for resale as device in High Risk Applications. All application and safety related information in this document (including application descriptions, suggested safety measures, suggested Kontron products, and other materials) is provided for reference only.

Revision History

Revision	Brief Description of Changes	Date of Issue	Author/ Editor
1.0	Initial version	2018-October-02	CW

Terms and Conditions

Kontron warrants products in accordance with defined regional warranty periods. For more information about warranty compliance and conformity, and the warranty period in your region, visit http://www.kontron.com/terms-and-conditions.

Kontron sells products worldwide and declares regional General Terms & Conditions of Sale, and Purchase Order Terms & Conditions. Visit http://www.kontron.com/terms-and-conditions.

For contact information, refer to the corporate offices contact information on the last page of this user guide or visit our website <u>CONTACT US</u>.

Customer Support

Find Kontron contacts by visiting: http://www.kontron.com/support.

Customer Service

As a trusted technology innovator and global solutions provider, Kontron extends its embedded market strengths into a services portfolio allowing companies to break the barriers of traditional product lifecycles. Proven product expertise coupled with collaborative and highly-experienced support enables Kontron to provide exceptional peace of mind to build and maintain successful products.

For more details on Kontron's service offerings such as: enhanced repair services, extended warranty, Kontron training academy, and more visit http://www.kontron.com/support-and-services/services.

Customer Comments

If you have any difficulties using this user guide, discover an error, or just want to provide some feedback, contact Kontron support. Detail any errors you find. We will correct the errors or problems as soon as possible and post the revised user guide on our website.

Symbols

The following symbols may be used in this user guide

ADANGER

DANGER indicates a hazardous situation which, if not avoided, will result in death or serious injury.

AWARNING

WARNING indicates a hazardous situation which, if not avoided, could result in death or serious injury.

NOTICE

NOTICE indicates a property damage message.

ACAUTION

CAUTION indicates a hazardous situation which, if not avoided, may result in minor or moderate injury.



Electric Shock!

This symbol and title warn of hazards due to electrical shocks (> 60 V) when touching products or parts of products. Failure to observe the precautions indicated and/or prescribed by the law may endanger your life/health and/or result in damage to your material.



ESD Sensitive Device!

This symbol and title inform that the electronic boards and their components are sensitive to static electricity. Care must therefore be taken during all handling operations and inspections of this product in order to ensure product integrity at all times.



HOT Surface!

Do NOT touch! Allow to cool before servicing.



Laser!

This symbol inform of the risk of exposure to laser beam and light emitting devices (LEDs) from an electrical device. Eye protection per manufacturer notice shall review before servicing.



This symbol indicates general information about the product and the user guide.

This symbol also indicates detail information about the specific product configuration.



This symbol precedes helpful hints and tips for daily use.

For Your Safety

Your new Kontron product was developed and tested carefully to provide all features necessary to ensure its compliance with electrical safety requirements. It was also designed for a long fault-free life. However, the life expectancy of your product can be drastically reduced by improper treatment during unpacking and installation. Therefore, in the interest of your own safety and of the correct operation of your new Kontron product, you are requested to conform with the following guidelines.

High Voltage Safety Instructions

As a precaution and in case of danger, the power connector must be easily accessible. The power connector is the product's main disconnect device.

ACAUTION

Warning

All operations on this product must be carried out by sufficiently skilled personnel only.

ACAUTION

Electric Shock!



Before installing a non hot-swappable Kontron product into a system always ensure that your mains power is switched off. This also applies to the installation of piggybacks. Serious electrical shock hazards can exist during all installation, repair, and maintenance operations on this product. Therefore, always unplug the power cable and any other cables which provide external voltages before performing any work on this product.

Earth ground connection to vehicle's chassis or a central grounding point shall remain connected. The earth ground cable shall be the last cable to be disconnected or the first cable to be connected when performing installation or removal procedures on this product.

Special Handling and Unpacking Instruction

NOTICE

ESD Sensitive Device!



Electronic boards and their components are sensitive to static electricity. Therefore, care must be taken during all handling operations and inspections of this product, in order to ensure product integrity at all times.

Do not handle this product out of its protective enclosure while it is not used for operational purposes unless it is otherwise protected.

Whenever possible, unpack or pack this product only at EOS/ESD safe work stations. Where a safe work station is not guaranteed, it is important for the user to be electrically discharged before touching the product with his/her hands or tools. This is most easily done by touching a metal part of your system housing.

It is particularly important to observe standard anti-static precautions when changing piggybacks, ROM devices, jumper settings etc. If the product contains batteries for RTC or memory backup, ensure that the product is not placed on conductive surfaces, including anti-static plastics or sponges. They can cause short circuits and damage the batteries or conductive circuits on the product.

Lithium Battery Precautions

If your product is equipped with a lithium battery, take the following precautions when replacing the battery.

ACAUTION

Danger of explosion if the battery is replaced incorrectly.

- Replace only with same or equivalent battery type recommended by the manufacturer.
- Dispose of used batteries according to the manufacturer's instructions.

General Instructions on Usage

In order to maintain Kontron's product warranty, this product must not be altered or modified in any way. Changes or modifications to the product, that are not explicitly approved by Kontron and described in this user guide or received from Kontron Support as a special handling instruction, will void your warranty.

This product should only be installed in or connected to systems that fulfill all necessary technical and specific environmental requirements. This also applies to the operational temperature range of the specific board version that must not be exceeded. If batteries are present, their temperature restrictions must be taken into account.

In performing all necessary installation and application operations, only follow the instructions supplied by the present user guide.

Keep all the original packaging material for future storage or warranty shipments. If it is necessary to store or ship the product then re-pack it in the same manner as it was delivered.

Special care is necessary when handling or unpacking the product. See Special Handling and Unpacking Instruction.

Quality and Environmental Management

Kontron aims to deliver reliable high-end products designed and built for quality, and aims to complying with environmental laws, regulations, and other environmentally oriented requirements. For more information regarding Kontron's quality and environmental responsibilities, visit http://www.kontron.com/about-kontron/corporate-responsibility/quality-management.

Disposal and Recycling

Kontron's products are manufactured to satisfy environmental protection requirements where possible. Many of the components used are capable of being recycled. Final disposal of this product after its service life must be accomplished in accordance with applicable country, state, or local laws or regulations.

WEEE Compliance

The Waste Electrical and Electronic Equipment (WEEE) Directive aims to:

- Reduce waste arising from electrical and electronic equipment (EEE)
- Make producers of EEE responsible for the environmental impact of their products, especially when the product become waste
- Encourage separate collection and subsequent treatment, reuse, recovery, recycling and sound environmental disposal of EEE
- Improve the environmental performance of all those involved during the lifecycle of EEE



Environmental protection is a high priority with Kontron.

Kontron follows the WEEE directive

You are encouraged to return our products for proper disposal.

Table of Contents

Symbo	ols	6
For Yo	our Safety	7
High V	oltage Safety Instructions	7
Specia	al Handling and Unpacking Instruction	7
Lithiur	m Battery Precautions	8
Genera	al Instructions on Usage	8
Quality	y and Environmental Management	8
Dispos	sal and Recycling	8
WEEE	Compliance	8
	of Contents	
List of	Tables	11
List of	Figures	12
1/	General Safety Instructions for IT Equipment	13
2/	Introduction	15
3/	Standards, Certifications and Directives	16
4/	Shipment and Unpacking	18
4.1. Pa	ckaging	
4.2. Ur	 праскіng	18
4.3. Sc	ope of Delivery	18
4.4. Ac	ccessories	18
4.5. Op	otional Parts (System Expansion)	18
	ontron Optional mPCIe modules	
4.7. Ty	pe Label and Product Identification	19
-		
5/	Product Overview	20
- *	Product Overviewont Panel Views	
5.1. Fro		21
5.1. Fro 5.1.1. Po	ont Panel Views	21 22
5.1. Fro 5.1.1. Po 5.1.2. P	ont Panel Views Ower Connector	21 22 22
5.1. Fro 5.1.1. Po 5.1.2. P 5.1.3. H	ont Panel Views Power Connector Protective Earth	21 22 22
5.1. Fro 5.1.1. Po 5.1.2. P 5.1.3. H 5.1.4. D	ont Panel Views Power Connector Protective Earth HDMI (HDMI)	21 22 22 22
5.1. Fro 5.1.1. Po 5.1.2. Po 5.1.3. Ho 5.1.4. Co 5.1.5. E	ont Panel Views Power Connector Protective Earth HDMI (HDMI) Display Port (DP)	2122222222
5.1. Fro 5.1.1. Po 5.1.2. Po 5.1.3. Ho 5.1.4. Co 5.1.5. Eo	ont Panel Views Power Connector Protective Earth Display Port (DP) Ethernet (LAN1, LAN2)	2122222222
5.1. Fro 5.1.1. Po 5.1.2. Po 5.1.3. H 5.1.4. C 5.1.5. E 5.1.6. U 5.1.7. Po	ont Panel Views Power Connector Protective Earth HDMI (HDMI) Display Port (DP) Ethernet (LAN1, LAN2)	2122222222
5.1. Frc 5.1.1. Pc 5.1.2. P 5.1.3. H 5.1.4. C 5.1.5. E 5.1.6. U 5.1.7. P 5.1.8. S	Ont Panel Views Prower Connector Protective Earth HDMI (HDMI) Display Port (DP) Ethernet (LAN1, LAN2) USB 3.0 Power-On	2122222222222222
5.1. Frc 5.1.1. Pr 5.1.2. P 5.1.3. H 5.1.4. C 5.1.5. E 5.1.6. U 5.1.7. P 5.1.8. S 5.2. Re	Ont Panel Views Ower Connector Orotective Earth Olisplay Port (DP) Othernet (LAN1, LAN2) OSB 3.0 Ower-On Orotective Earth Oro	2122222222
5.1. Fro 5.1.1. Po 5.1.2. P 5.1.3. H 5.1.4. D 5.1.5. E 5.1.6. U 5.1.7. P 5.1.8. S 5.2. Re 5.3. To	Ont Panel Views Prower Connector Protective Earth HDMI (HDMI) Display Port (DP) Ethernet (LAN1, LAN2) JSB 3.0 Power-On Serial Ports (X1, X2) and (option X3, X4) Poar View	212222222222222222
5.1. Fro 5.1.1. Po 5.1.2. P 5.1.3. H 5.1.4. D 5.1.5. E 5.1.6. U 5.1.7. P 5.1.8. S 5.2. Re 5.3. To	Protective Earth	2122222222222222222222
5.1. Fro 5.1.1. Po 5.1.2. P 5.1.3. H 5.1.4. C 5.1.5. E 5.1.6. U 5.1.7. P 5.1.8. S 5.2. Re 5.3. To 5.4. Sio	ont Panel Views Prower Connector Protective Earth HDMI (HDMI) Display Port (DP) Ethernet (LAN1, LAN2) USB 3.0 Power-On Serial Ports (X1, X2) and (option X3, X4) Par View Display Ports (X1, X2) and (option X3, X4)	21222222222222222222
5.1. Fro 5.1.1. Po 5.1.2. P 5.1.3. H 5.1.4. C 5.1.5. E 5.1.6. L 5.1.7. P 5.1.8. S 5.2. Re 5.3. To 5.4. Sio 6/ 6.1. Sto	ont Panel Views Prower Connector Protective Earth HDMI (HDMI) Display Port (DP) Ethernet (LAN1, LAN2) USB 3.0 Power-On Serial Ports (X1, X2) and (option X3, X4) Par View Display Ports (X1, X2) and (option X3, X4) Display Ports (X1, X2) Display Po	212222222222222222222222
5.1. Fro 5.1.1. Pro 5.1.2. P 5.1.3. H 5.1.4. C 5.1.5. E 5.1.6. U 5.1.7. P 5.1.8. S 5.2. Re 5.3. To 5.4. Sio 6/ 6.1. Sto 6.1.1. 2	Ont Panel Views Ower Connector Orotective Earth HDMI (HDMI) Display Port (DP) Ethernet (LAN1, LAN2) JSB 3.0 Ower-On Serial Ports (X1, X2) and (option X3, X4) Par View Op and Bottom Views de Views System Extension Drage	212222222222222222222222
5.1. Fro 5.1.1. Pro 5.1.2. P 5.1.3. H 5.1.4. C 5.1.5. E 5.1.6. U 5.1.7. P 5.1.8. S 5.2. Re 5.3. To 5.4. Sio 6/ 6.1. Sto 6.1.1. 2	Ont Panel Views Ower Connector Orotective Earth HDMI (HDMI) Display Port (DP) Ethernet (LAN1, LAN2) USB 3.0 Ower-On Serial Ports (X1, X2) and (option X3, X4) Orar View Op and Bottom Views Op and Bottom Views Obstem Extension Orage USB HDD/SSD Drive Bay	
5.1. Fro 5.1.1. Pro 5.1.2. P 5.1.3. H 5.1.4. E 5.1.5. E 5.1.6. U 5.1.7. P 5.1.8. S 5.2. Re 5.3. To 5.4. Sio 6/ 6.1. Sto 6.1.1. 2 6.1.2. N 6.2. Ex	Protective Earth	
5.1. Fro 5.1.1. Pro 5.1.2. P 5.1.3. H 5.1.4. E 5.1.5. E 5.1.6. U 5.1.7. P 5.1.8. S 5.2. Re 5.3. To 5.4. Sio 6/ 6.1. Sto 6.1.1. 2 6.1.2. N 6.2. Ex	ont Panel Views Protective Earth HDMI (HDMI) Display Port (DP) Ethernet (LAN1, LAN2) JSB 3.0 Power-On Serial Ports (X1, X2) and (option X3, X4) pand Bottom Views op and Bottom Views System Extension prage 1.5" HDD/SSD Drive Bay M.2 SSD spansion	
5.1. Fro 5.1.1. Pro 5.1.2. P 5.1.3. H 5.1.4. E 5.1.5. E 5.1.6. U 5.1.7. P 5.1.8. S 5.2. Re 5.3. To 5.4. Sio 6/ 6.1. Sto 6.1.1. 2 6.1.2. N 6.2. Ex 6.2.1. N	ont Panel Views Protective Earth HDMI (HDMI) Display Port (DP) Ethernet (LAN1, LAN2) JSB 3.0 Power-On Serial Ports (X1, X2) and (option X3, X4) Par View Op and Bottom Views de Views System Extension Dorage Dorage Dorage Dorage Mini-PCIe Card	
5.1. Fro 5.1.1. Pro 5.1.2. P 5.1.3. H 5.1.4. C 5.1.5. E 5.1.6. U 5.1.7. P 5.1.8. S 5.2. Re 5.3. To 5.4. Sio 6.1. Sto 6.1.1. 2 6.1.2. N 6.2. Ex 6.2.1. N 7/	ont Panel Views lower Connector Protective Earth HDMI (HDMI) Display Port (DP) Ethernet (LAN1, LAN2) JSB 3.0 Power-On Serial Ports (X1, X2) and (option X3, X4) ear View op and Bottom Views de Views System Extension orage L.5" HDD/SSD Drive Bay M.2 SSD spansion Mini-PCle Card Accessing Components	

7.2.1. Opening the Chassis	
7.2.2. Installing and Removing M.2 SSD Cards	28
7.2.3. Installing and Removing mPCIE Expansion Cards	29
8/ Thermal Considerations	30
8.1. Heatsink Plate	30
8.2. Heatsink Fins - (option)	30
9/ Installation Instructions	31
9.1. DIN Rail Mounting	31
9.2. Power Connector	32
9.2.1. Wiring the DC Mating Power Connector	32
10/ Starting Up	
10.1. Connecting to Power Supply	
10.1.1. Power-On Switch	
10.2. Operating System (OS) and Drivers	
11/ Technical Data	
11.1. Block Diagram	
11.2. Technical Specification	
11.3. Mechanical Specification	
11.4. Power Specification	
11.4.1. Power Consumption	
11.4.2. Protective Earth	
11.5. Environmental Specification	
·	
12/ Connector, Socket and Jumper Pin Assignments	
12.2. Front Panel Connector Pin Assignments	
12.2.1. Input Power Connector	
·	
12.2.2. HDMI Connector (HDMI)	
12.2.3. Display Port Connector (DP)	
12.2.5. USB 3.0 Port	
12.2.6. Serial Port Connectors (X1, X2)	
12.3. Internal Connectors and Sockets	
12.4. Internal Connector and Socket Pin Assignments	44
12.4.1. 12 V DC Out Power Connector	
12.4.2. Battery Power Input Connector	
12.4.3. HDD Power Output Connector	
12.4.4. Front Panel 1-Pin Header	
12.4.5. Front Panel 2-Pin Header	
12.4.6. Serial ATA Port 0 Connector	
12.4.7. USB 2.0 Port Pin Header (option)	
12.4.8. mPCle Express V 1.2 Socket	
12.4.9. M.2 Key B Socket	
12.5. Jumpers	
12.6. Jumper Pin Assignments	
12.6.1. SIM Card Selection (JP1) Pitch 2.54 mm	
12.6.2. Backlight Enable Selction (JP2) Pitch 2.00 mm	49
12.6.3. Panel & Backlight Power Selection (JP3) Pitch 2.0 mm	49
12.6.4. AT/ATX Power Mode Selection (JP4) Pitch 2.54 mm	49
12.6.5. M2 Key B LED (JP5) Pitch 2.54 mm	49

12.6.6. MPCIE Activity LED (JP6) Pitch 2.54 mm	<u>/</u> ι0
12.6.7. RTC Reset selection (JP8) Pitch 2.54 mm	
12.6.8. USB Power Selection (JP9) Pitch 2.00 mm	
12.6.9. ME F/W Selection (JP10) Pitch 2.54 mm	
13/ BIOS	
13.1. Starting the uEFI BIOS	
13.2. Setup Menus	
13.2.1. Main Setup Menu	
13.2.2. Advanced Setup Menu	53
13.2.3. Power Configuration Menu	57
13.2.4. Boot Setup Menu	58
13.2.5. Security Setup Menu	59
13.2.6. Save and Exit Set up Menu	61
14/ Technical Support	
14.1. Returning Defective Merchandise	
15/ Storage, Transportation and Maintenance	
15.1. Storage	
15.2. Transportation	
15.3. Maintenance	
15.3.1. Replacing the Lithium Battery	
16/ Warranty	
16.1. Limitation/Exemption from Warranty Obligation	65
17/ Disposal	
Appendix A: List of Acronyms	67
About Kontron	68
List of Tables	
cist of Tables	
Table 1: Standards, Certifications and Directives Compliance	
Table 2: Scope of Delivery	18
Table 3: Accessories	
Table 4: Technical Specification	
Table 5: Software Specification	
Table 6: Mechanical Specification	
Table 7: Power Specification	
Table 8: Power Consumption	
Table 10: Front Panel Connectors	
Table 11: Internal Connectors Top side	
Table 12: Jumpers	
Table 13: Navigation Hot Keys Available in the Legend Bar	
Table 14: Advanced Menu	
Table 15: Power Configuration Setup Menu	57
Table 16: Boot Setup Menu Sub-screens and Functions	
Table 17: Security Setup Menu Sub-screens and Functions	
Table 18: Save and Exit Setup Menu Sub-screens and Functions	
Table 19: List of Acronyms (Example)	67

List of Figures

Figure 1: KBOx A-150-APL	
Figure 2: KBox A-150-Type Label Example	
Figure 3: KBox A-150-APL Chassis Variants	
Figure 4: Front Panel View (External HDD/SSD drive bay)	21
Figure 5: Front Panel View (No external HDD/SSD drive bay)	21
Figure 6: Rear View	
Figure 7: Top and Bottom Views	
Figure 8: Side Views	
Figure 9: Side Views with 2.5" HDD/SSD Drive Bay	24
Figure 10: Mainboard Fastening Screws	27
Figure 11: Front Panel Fastening Screws	27
Figure 12: Heaksink Fin	
Figure 13: DIN Rail Mounting Clamp Upper Position	
Figure 14: DIN Rail Mounting Clamp Screw Dimensions (Measurements in mm)	31
Figure 15: Phoenix Power Mating Connector	
Figure 16: Block Diagram	
Figure 17: Front Panel Dimensions with HDD/SSD Drive Bay (Measurements in mm)	
Figure 18: Rear Side Dimensions with HDD/SSD Drive Bay (Measurements in mm)	
Figure 19: Top Side Dimensions with HDD/SSD Drive Bay (Measurements in mm)	
Figure 20: Side View Dimensions with HDD/SSD Drive Bay (Measurements in mm)	
Figure 21: Front Panel Dimensions without HDD/SSD Drive Bay (Measurements in mm)	37
Figure 22: Rear Side Dimensions without HDD/SSD Drive Bay (Measurements in mm)	37
Figure 23: Top Side Dimensions without HDD/SSD Drive Bay (Measurements in mm)	38
Figure 24: Side View Dimensions without HDD/SSD Drive Bay (Measurements in mm)	
Figure 25: Front Panel Connectors	
Figure 26: Internal Connectors Top View	
Figure 27: Jumper Location	48
Figure 28: Main Setup Menu Example	
Figure 29: Advanced Setup Menu Example	53
Figure 30: Power Configuration Setup Menu Example	57
Figure 31: Boot Setup Menu Example	58
Figure 32: Security Setup Menu Example	59
Figure 33: Save and Exit Set up Menu Example	61

1/ General Safety Instructions for IT Equipment

▲WARNING



Please read this chapter carefully and take careful note of the instructions, that have been compiled for your safety and to ensure to apply in accordance with intended regulations. If the following general safety instructions are not observed, it could lead to injuries to the operator and/or damage of the product; in cases of non-observance of the instructions Kontron is exempt from accident liability, this also applies during the warranty period.

The product has been built and tested according to the basic safety requirements for low voltage (LVD) applications and has left the manufacturer in safety-related, flawless condition. To maintain this condition and also to ensure safe operation, the operator must not only observe the correct operating conditions for the product but also the following general safety instructions:

- The product must be used as specified in the product documentation, in which the instructions for safety for the product and for the operator are described. These contain guidelines for setting up, installation and assembly, maintenance, transport, and storage.
- The on-site electrical installation must meet the requirements of the country's specific local regulations.
- If a power cable comes with the product, only this cable should be used. Do not use an extension cable to connect the product.
- To guarantee that sufficient air circulation is available to cool the product, ensure that if the product has ventilation openings the openings are not covered or blocked. If an air filter is provided, this should be cleaned regularly. Additionally, make sure the system is well ventilated by observing if heat-dissipating elements are covered/obstructed by objects as this can cause a build-up of heat and stop heat from being dispersed into the ambient environment.
- Do not place the system close to heat sources or damp places.
- Only products or parts which fulfill the requirements of SELV circuits (Safety Extra Low Voltage) as stipulated by IEC 60950-1 may be connected to the available interfaces.
- ▶ Before opening the product, make sure that the product is disconnected from the mains. Complete disconnection is only possible if the power cable is disconnected and removed. Ensure that there is free and easy access to enable disconnection.
- If the product is opened for the insertion or removal of expansion devices (depending on the configuration of the system), this may only be carried out by qualified persons.
- If extensions are made to the product, the following must be observed:
 - ▶ All effective legal regulations and all technical data for the expansion devices are adhered to.
 - The power consumption of any expansion devices does not exceed the specified limitations.
 - The current consumption of the system does not exceed the value stated on the product label.
- Only original accessories that have been approved by Kontron can be used.
- Please note: safe operation is no longer possible when any of the following applies:
 - Damage is visible.
 - The device no longer functions.

In these cases, the device must be switched off and it must be ensured that the device can no longer be operated.

Additional Safety Instructions for DC Power Supply Circuits

- To guarantee safe operation of products with DC power supply voltages larger than 60 volts DC or a power consumption larger than 240 VA, please observe that:
 - The product is set up, installed and operated in a room or enclosure marked with "RESTRICTED ACCESS", if there are no safety messages on product as safety signs and labels on the product itself.
 - No cables or parts without insulation in electrical circuits with dangerous voltage or power should be touched directly or indirectly
 - A reliable protective earthing connection is provided
 - A suitable, easily accessible disconnecting product is used in the application (e.g. overcurrent protective product), if the product itself is not disconnectable
 - A disconnect product, if provided in or as part of the equipment, shall disconnect both poles simultaneously
 - Interconnecting power circuits of different products cause no electrical hazards
- A sufficient dimensioning of the power cable wires must be selected according to the maximum electrical specifications on the product label as stipulated by EN60950-1 or VDE0100 or EN60204 or UL508 regulations.
- The product does not generally fulfill the requirements for "centralized DC power systems" (UL 60950-1, Annex NAB; D2) and therefore may not be connected to such products!

2/Introduction

This user guide describes the KBox A-150-APL. New users are recommended to study the installation instructions within this user guide before switching on the power.

Kontron's KBox A-150-APL is developed specifically for control cabinet applications with flexible DIN rail mounting positions for use when space is limited. The fanless design ensures a significantly prolonged lifespan and high system availability.

The KBox A-150-APL is a high-end industrial grade box PC based on the Intel ® Apollo Lake Pentium® Quad Core platforms designed for use in performance demanding applications. Due to the varied amount of onboard interfaces such as GbE, USB 3.0, display port (DP), HDMI and serial ports, the KBox A-150 APL enables connectivity for nearly all applications and supports memory expandability via M.2 SSD memory expansion.

General features are:

- Intel® Pentium® Quad Core™ N4200
- Up to 16 GB GB RAM with DDR3L SODIMM
- ▶ Up to 512 GB memory storage via Internal M.2 SSD (option)
- External 2.5" HDD/SSD drive bay (option)
- External Interfaces 1x HDMI, 1x DP, 2x GbE, 4x USB 3.0, 2x COM (RS232, RS422, RS485 configurable)
- Fanless passive cooling
- Supports Kontron's APPROTECT (option)

The KBox A-150-APL is intended for 24/7 continuous operation and longtime industrial applications. All components are selected to ensure a long lifetime.

Figure 1: KBox A-150-APL





The KBox A-150-APL is factory configured to meet customer requirements. Kontron does not recommend opening the system as this may cause damage to internal components.

3/ Standards, Certifications and Directives

The KBox A-150-APL is currently in test and aims to comply with the requirements of the following standards.



If the user modifies the product, prerequisites for specific approvals such as CE conformity declaration (safety requirements) may no longer apply.

Table 1: Standards, Certifications and Directives Compliance

CE-Mark	Electromagnetic Compatibility	Directive 2014/30/EU	
Compliant Low Voltage		Directive 2014/35/EU	
with EU Directives	Radio Equipment Directive (RED)	Directive 2014/53/EU	
	RoHS II	Directive 2011/65/EU	
EMC 2014/30/EU Emission	CISPR 11 EN 55011	Industrial, scientific and medical equipment - Radio-frequency disturbance characteristics - Limits and methods of measurement	
EMC 2014/30/EU Immunity	EN 61000-6-2	Electromagnetic compatibility (EMC), part 6-2: Generic standards- Immunity for industrial environment	
EMC 2014/53/EU	EN 301 489-1 V2.2.0	Electro-Magnetic Compatibility (EMC) standard for radio equipment and services; Part 1: Common technical requirements; Harmonized Standard covering the essential requirements of article 3.1(b) of Directive 2014/53/EU and the essential requirements of article 6 of Directive 2014/30/EU	
EMC 2014/53/EU	EN 301 489-17 V3.1.1	Electro-Magnetic Compatibility (EMC) standard for radio equipment and services; Part 17: Specific conditions for Broadband Data Transmission Systems; Harmonized Standard covering the essential requirements of article 3.1(b) of Directive 2014/53/EU	
RF Spectrum Efficiency & Spurious Emission 2014/53/EU	EN 300 328 V2.1.1	Wideband transmission systems; Data transmission equipment operating in the 2,4 GHz ISM band and using wide band modulation techniques; Harmonized Standard covering the essential requirements of article 3.2 of Directive 2014/53/EU	
EMC CFR 47 Part 15, Subpart B	ANSI C63.4 CISPR 16 ICES-003	The American National Standards Institute standard ANSI C63.4 is the key standard for measuring electrical and electronic equipment for showing compliance to FCC and Industry Canada regulations.	
Safety 2014/35/EU	IEC 61010-1 EN 61010-1 UL 61010-1	Safety requirements for electrical equipment for measurement, control and laboratory use - Part 1: General requirements	
	IEC 61010-2-201 EN 61010-2-201 UL 61010-2-201	Safety requirements for electrical equipment for measurement, control and laboratory use - Part 2-201: Particular requirements for control equipment	
Safety and Health 2014/35/EU	EN 62311	Assessment of the compliance of low power electronic and electrical equipment with the basic restrictions related to human exposure to electromagnetic fields (10 MHz to 300 GHz)	

WEEE	Waste Electrical and	Compliant with the Waste Electrical and Electronic Equipment
2002/96/	EC Electronic Equipment	(WEEE) directive to reduce waste of electrical and electronic
	Directive (WEEE Directive)	equipment, encourage recycling and environmental disposal
		and increase the environmental awareness of producers

4/Shipment and Unpacking

4.1. Packaging

All parts are delivered together in a product specific cardboard package designed to provide adequate protection and absorb shock. Kontron recommends keeping the packaging to store or transport the product.

4.2. Unpacking

Proceed as follows to unpack the unit:

- 1. Remove packaging.
- 2. Do not discard the original packaging. Keep packaging for future relocation or storage.
- 3. Check the delivery for completeness by comparing it with the original order.
- 4. Keep the associated paperwork. It contains important information for handling the unit.
- 5. Check the contents for visible shipping damage.
- 6. If you notice any shipping damage or inconsistencies between the contents and the original order, contact Kontron for help and information.

4.3. Scope of Delivery

Check that your delivery is complete, and contains the items listed below. If you discover damaged or missing items, contact your dealer.

Table 2: Scope of Delivery

Delivered Item	Description
KBox A-150-APL	Corresponding to the ordered product configuration
POWER-SUBCON PSC 1,5/3-F, 3-pin plug	Mating connector for the front panel 3-pin DC power connector

4.4. Accessories

Table 3: Accessories

Part	Part Description	
Power Supply	External power supply	
Power Cord 230 V power Cord		
7 mm – 9.5 mm Spacer	7 mm – 9.5 mm Spacer for 7 mm high 2.5 " SSD drives	
Heatsink fins (turnable)	Heatsink fins that are screwed on and turnable by 90°to suit each possible installation by remaining in a vertical position.	

4.5. Optional Parts (System Expansion)

- ► 1x 2.5" HDD/SSD drive bay for memory expansion (external)
- 1x M.2 Key B socket for memory extension (internal)
- 1x mPCle socket (internal)


4.6. Kontron Optional mPCIe modules

- APPROTECT mPCIe module
- WLAN mPCIe module

4.7. Type Label and Product Identification

The type label is position on contains the following information.

Figure 2: KBox A-150-Type Label Example

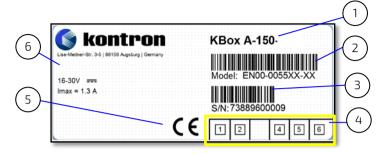

- 1. Product name (KBox A-150-APL)
- 2. Model number with barcode
- 3. Serial Number (S/N) with barcode
- 4. For internal product use
- 5. Certification information
- 6. Technical data

5/ Product Overview

Before working with the KBox A-150-APL, Kontron recommends that users take a few minutes to learn about the various parts of the KBox A-150-APL.

The KBox A-150-APL is flexible industrial grade box PC fanless device designed for use in performance demanding applications requiring a flexible rapid rail attachment solution. Based on the Intel ® Apollo Lake platforms the KBox A-150-APL features long-term availability and supports a varied amount of onboard interfaces to enable connectivity to nearly all applications. An Internal M.2 Key B sockets support memory expansion and an internal mPCIe sockets supports mPCIe expansion cards.

All variants are available in a robust steel chassis, designed for operation in a DIN rail environment using either a horizontal and vertical orientation. The chassis height differs depending on whether an external 2.5" HDD/SSD drive bay is installed on the side of the chassis, see Figure 3: KBox A-150-APL Chassis Variants

Figure 3: KBox A-150-APL Chassis Variants



With external 2.5" HDD/SDD drive bay



No external drive bay




The KBox A-150-APL is designed for operation in a DIN rail environment using either a horizontal and vertical orientation.

5.1. Front Panel Views

The front panel includes all I/O connectors. The position of the protective earth stud bolt varies depending on whether an external 2.5" HDD/SSD drive bay is supported.


Figure 4: Front Panel View (External HDD/SSD drive bay)

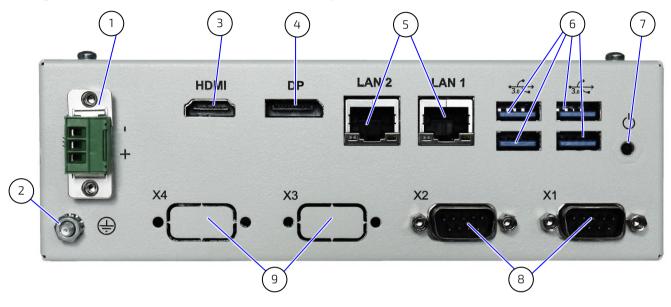

- 1 Power connector
- 2 Protective Earth Stud bolt
- 3 HDMI connector
- 4 Display port
- 5 2x LAN Connector

- 6 4x USB 3.0
- 7 Power-on
- 8 2x Serial ports
- 9 2x Breakouts

Figure 5: Front Panel View (No external HDD/SSD drive bay)

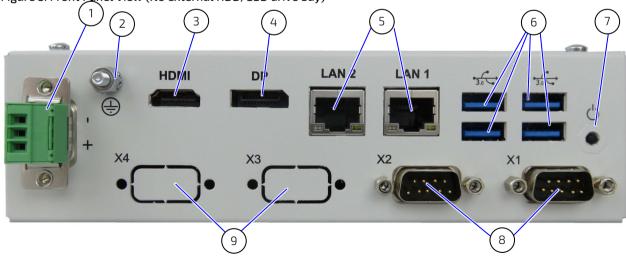

- 1 Power connector
- 2 Protective Earth stud bolt
- 3 HDMI connector
- 4 Display port
- 5 2x LAN connector

- 6 4x USB 3.0
- 7 Power-on
- 8 2x Serial ports
- 9 2x Breakouts

5.1.1. Power Connector

There is one 3-pin Phoenix power connector on the front panel supporting an input DC voltage range of 9 VDC to 30 VDC, see Figure 4(pos. 1). The mating connector required to connect the power connector to a DC main power source, is supplied with the KBox A-150-APL, (refer to Chapter 4.3: Scope of Delivery). For information on how to connect the supplied mating connector to the front panel input power connector, refer to Chapter 9.2.1: Wiring the DC Mating Power Connector.

For the pin assignment of the Input power connector, refer to Chapter 12.2.1: Input Power Connector.

5.1.2. Protective Earth

There is a protective earth stud bolt on the front panel connected to the chassis GND inside the system. The position of the protective earth stud bolt varies depending on whether the KBox A-150-APL is delivered with a 2.5" HDD/SSD drive bay, see Figure 4 (pos. 2) or without a 2.5" HDD/SSD drive bay, see Figure 5 (pos. 2).

5.1.3. HDMI (HDMI)

There is one HDMI 1.4 interface (3840 x 2160 @ 30Hz), for video/audio solutions, see Figure 4 (pos.3).

For the pin assignment of the HDMI connector, refer to Chapter 12.2.2: HDMI Connector (HDMI).

5.1.4. Display Port (DP)

There is one DP 1.2 interface (4096 x 2160 @ 60Hz) for video only solutions see Figure 4(pos.4).

For the pin assignment of the DP connector, refer to Chapter 12.2.3: Display Port Connector.

5.1.5. Ethernet (LAN1, LAN2)

There are two LAN ports both supporting 10/100/100 Mbit Ethernet, see Figure 4 (pos.5).

For the pin assignment of the RJ45 Ethernet connectors, refer to Chapter 12.2.4: GbE RJ45 Connectors (LAN1, LAN2).

5.1.6. USB 3.0

There is one USB 3.0 port allowing for the connection of a USB 3.0/USB 2.0 compatible device, see Figure 4 (pos.6).

For the pin assignment of the USB 3.0 connector, refer to Chapter 12.2.5: USB 3.0 Port.

5.1.7. Power-On

There is a power-on switch on the front panel to apply power or perform an orderly shutdown, see Figure 4: Front Panel (pos.8).

5.1.8. Serial Ports (X1, X2) and (option X3, X4)

There are two serial ports COM1 and COM2 both supporting RS232/422/485, .see Figure 4 (pos.8). The type of serial port is configured in the BIOS in Super IO Configuration>Serial Port # Configuration>Serial Port # Type>. Additionally, there are two breakouts for optional serial ports supporting RS232 only, see Figure 4 (pos.9).

For the pin assignment of the serial port (COM) connectors, refer to Chapter 12.2.6: Serial Port Connectors (X1, X2)


5.2. Rear View

Figure 6: Rear View

DIN rail clamp

5.3. Top and Bottom Views

Figure 7: Top and Bottom Views

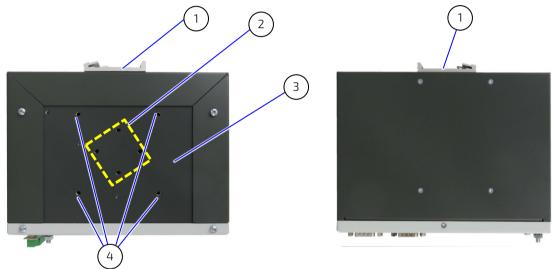

- 1 Din rail clamp
- 2 2x DIN rail mounting holes pairs for (horizontal or vertical) Max. M4 x 6 mm
- 3 Heat sink plate

4 4x Mounting holes for heatsink fins

5.4. Side Views

The 2.5" HDD/SSD drive bay is accessible on the side of the KBox A-150-APL. The height of the chassis depending on whether the KBox A-150-APL is supplied with or without the 2.5" HDD/SSD drive bay. The height of the side is 58 mm high with 2.5" HDD/SSD drive bay and 50 mm high without 2.5" HDD/SSD drive bay.

Figure 8: Side Views





Figure 9: Side Views with 2.5" HDD/SSD Drive Bay





6/ System Extension



The KBox A-150-APL is factory configured to meet customer requirements. Kontron does not recommend opening the system to install expansion cards as this may cause damage to internal components.

6.1. Storage



Pay attention to the manufacturer's lifespan specification. Due to the limited lifespan of HDD/SSD drives Kontron recommends checking the condition of installed HDD/SSD drives via S.M.A.R.T.regularly.

6.1.1. 2.5" HDD/SSD Drive Bay

To expand storage memory for variants with an external 2.5" HDD/SSD Drive Bay, use a 2.5" slim SSD. Before installing or removing an existing SSD, refer to Chapter 7.1: Accessing External Components.

6.1.2. M.2 SSD

There is one internal M.2 Key B socket for the installation of one M.2 SSD (42 mm). Kontron recommends the use of Kontron reference devices. For information regarding the pin assignment of the M.2 socket, refer Chapter 12.4.9: M.2 Key B Socket.

Before installing or removing an existing internal M.2 Key B card, refer to Chapter 7.2.2: Installing and Removing M.2 SSD.

6.2. Expansion

6.2.1. Mini-PCle Card

There is one internal mini PCIE V 1.2 expansion socket. For information regarding the pin assignment of the mPCIe socket, refer Chapter 12.4.8: mPCIe Express V 1.2 Socket.

Before installing or removing an mPCIe expansion card, refer to Chapter 7.2.3: Installing and Removing mPCIE Expansion Cards.

7/ Accessing Components

This chapter contains important information that users must read before accessing components. Follow these procedures properly when accessing or installing component to extend the system.



The KBox A-150-APL is factory configured to meet customer requirements. Kontron does not recommend opening the system as this may cause damage to internal components.



The installation/removal of system components may only be performed by a qualified persons. Observe the "General Safety Instructions for IT-Equipment" and the "installation instructions" contained within this user guide.



ESD Sensitive

Follow the safety instructions for components that are sensitive to electrostatic discharge (ESD). Failure to observe this warning notice may result in damage to the product or/and internal components.



Because of the limited predetermined lifespan of expansion devices, Kontron recommends checking the condition of installed expansion devices regularly and to pay attention to the manufacturer specifications for lifespan.

7.1. Accessing External Components

7.1.1. 2.5" HDD/SSD Drive Bay

The KBox A-150-APL with 2.5" HDD/SSD drive bay supports the use of 9.5 mm and 7 mm SSD drives in the 2.5" HDD/SSD drive bay. To insure that 7 mm high SSDs are correctly connected and to avoid damage to the internal SATA connectors a spacer must be attached to 7 mm SSD drives to enables 7 mm SSD drives to correctly alignment with the internal SATA data and SATA power connector mounting points.

To remove/install a removable 2.5" HDD/SSD drive, perform the following steps:

- 1. Press the eject button on the right hand side of the HDD/SSD drive bay, to remove an existing HDD/SSD drive from the drive bay.
- 2. The drive bay springs open and the HDD/SSD drive automatically slides out a bit for removal.
- 3. Remove the drive by holding the sides and carefully pulling the drive out of the drive bay.



The 2.5" HDD/SSD drive bay allows for the installation of 9.5 mm or 7 mm high SSDs. A 7 mm high SSD can only be used, when an spacer is attached to the drive. The spacer ensures that a 7 mm high SSD drive is correctly aligned with the internal SATA data and SATA power connector mounting points.

- 4. For 9.5 mm high SSDs, carefully push the drive into the drive bay with the SSD contacts facing the drive bay and the drive facing downward until the connectors attach.
 - For 7 mm high SSDs, attach the SSD to an 7mm 9.5 mm spacer, then carefully push the SDD with spacer into the drive bay with the SSD contacts facing the drive bay and the drive facing downward until the connectors attach.
- 5. The KBox A-150-APL can now be powered up.

7.2. Accessing Internal Components

7.2.1. Opening the Chassis


To access the internal component open the KBox A-150-APL chassis by following the step below:



The KBox A-150-APL is factory configured to meet customer requirements. Kontron does not recommend opening the system as this may cause damage to internal components.

- 1. Close all applications. Shut down the system properly and disconnect the power cord from the power source. Disconnect all peripherals.
- 2. Place the KBox A-150 APL on a flat, clean and ESD-safe surface.
- 3. The front panel is attached to the mainboard. To remove the front panel and open the chassis the main board must also be released. To release the mainboard remove the two screws shown in Figure 10: Mainboard Fastening Screws.


Figure 10: Mainboard Fastening Screws



- A) Remove mainboard fastening screws
- 4. To release the front panel remove the five screws that fasten the front panel to the main chassis, see Figure 11: Front Panel Fastening Screws. One screw is located at the bottom of the front panel, two screws are located on the front panel's sides (right and left) and a further two screws are located on the front panel's top side. Retain all screws, to refasten the front panel to the main chassis.

Figure 11: Front Panel Fastening Screws







B) Remove front panel right and left side screws

- 5. Once released, carefully move the front panel away from the main chassis while taking care not to damage the attached mainboard. Place the front panel plus mainboard construction on an ESD-safe surface.
- 6. To close the KBox A-150 APL, proceed in the reverse order. Align the front panel with the main chassis and push backwards (towards the rear side of the chassis) while making sure that the front panel remains aligned and goes back as far as it will go. Secure the cover with the screws removed in step 4 and step 3.

7.2.2. Installing and Removing M.2 SSD Cards



The KBox A-150-APL is factory configured to meet customer requirements. Kontron does not recommend opening the system as this may cause damage to internal components.

To install an M.2 SSD (42 mm) follow the steps below

- Close all applications; shut down the system properly and disconnect the connection to the power source.
 Disconnect all peripherals.
- 2. Open the chassis as described in Chapter 7.2.1: Opening the Chassis (steps 1-6).
- 3. Locate the M.2 socket and the corresponding screw.
- 4. Insert the M.2. SSD card into the M.2 socket, at an angle of approx. 30°. It might be required to move the M.2 SSD card slightly from side to side to help ease the card carefully into the socket.
- 5. Secure the M.2 SSD card by pressing down on the free end.and carefully screw the M.2 SSD card to the mainboard until the M.2 SSD card is flat with the mainboard.
- 6. To close the KBox A-150-APL, proceed in the reverse order (step 6 to 1) of Chapter 7.2.1: Opening the Chassis.

To remove an M.2 SSD follow the steps below

- Close all applications; shut down the system properly and disconnect the connection to the power source.
 Disconnect all peripherals.
- 2. Open the Chassis as described in the Chapter 7.2.1: Opening the Chassis (steps 1-6).
- 3. Locate the M.2 SSD card installed into your system.
- 4. Remove the fastening screw and the M.2 SSD springs up at an angle of approximately 30° at the free end.
- 5. Gently pull the M.2 SSD card out of the M.2 socket.
- 6. Keep the fastening screw for further use.
- 7. To close the KBox A-150-APL, proceed in the reverse order (step 6 to 1) of Chapter 7.2.1: Opening the Chassis.



After changing the M.2 SSD the partitioning of the memory maybe different and require the system to be repartitioned.

7.2.3. Installing and Removing mPCIE Expansion Cards



The KBox A-150-APL is factory configured to meet customer requirements. Kontron does not recommend opening the system as this may cause damage to internal components.

To install a mini PCIe (mPCIe) cards follow the steps below:

- 1. Close all applications; shut down the system properly and disconnect the connection to the power source. Disconnect all peripherals.
- 2. Open the device as described in the Chapter 7.2.1: Opening the Chassis (step 1-6).
- 3. Locate the mPCle card socket and the corresponding fixing screw hole.
- 4. Insert the mPCIe card into the socket at an angle of approx. 30° and push it down until the fixing holes of the card are aligned with the mainboards fixing screw hole.
- 5. Secure the mPCIe by pressing down on the free end and carefully screw the mPCIe card to the mainboard until the mPCIe card is flat with the mainboard.
- 6. To close the KBox A-150-APL, proceed in reverse order (step 6 to 1) of Chapter 7.2.1: Opening the Chassis.

To remove a mini PCIe (mPCIe) card follow the steps below:

- Close all applications; shut down the system properly and disconnect the connection to the power source.
 Disconnect all peripherals.
- 2. Open the device as described in the Chapter 7.2.1: Opening the Chassis (step 1-6).
- 3. Locate the mPCIe card installed into your system.
- 4. Remove the fastening screw and the mPCIe card springs up at an angle of approximately 30° at the free end.
- 5. Gently pull the mPCIe card out of the socket.
- Torder to close the KBox A-150-APL, proceed in the reverse order (step 6 to 1) of Chapter 7.2.1: Opening the Chassis.

8/Thermal Considerations

AWARNING

Hot Surface - heatsink

Danger of burns. Heatsink can get very hot. To avoid burns and personal Injury:

- Do not touch the heatsink when the product is in operation
- Allow the product to cool before handling
- Wear protective gloves
- Always turn the product off when not in use

8.1. Heatsink Plate

The KBox A-150-APL is a fanless and passively cooled, using a heatsink plate to dissipate heat from within the chassis to the ambient environment. When mounting the KBox A-150-APL in a DIN rail enclosure or housing take care not to obstruct the airflow over the heatsink plate, as this stops sufficient heat dispersing into the ambient environment and causes a build-up of heat.

Features of the heatsink plate are:

Surface area of 171 mm x 105 mm

8.2. Heatsink Fins - (option)

An optional turnable heatsink with cooling fins is available for installation on the heatsink plate. The heatsink cooling fins are tunable by 90° and can be fitted on the KBox A-150-APL to suit each possible installation position by remaining in the vertical position to support the direction of the airflow within the DIN rail enclosure or housing. The heatsink supports the use of the DIN rail.

Figure 12: Heaksink Fin

A) Heatsink fin



B) Heatsink fin assembled with DIN rail



9/Installation Instructions



Install expansion cards before installing the KBox A-150-APL in the control cabinet.

9.1. DIN Rail Mounting

The KBox A-150-APL is a rail mount PC box designed for use in a DIN rail enclosure or housing by attaching a DIN rail mounting clamp. The DIN rail mounting clamp can be attached on:

- Top side of the chassis
- Heat sink on the top side of the chassis
- Rear side of the chassis

The position and direction of the clamp decides the orientation of the product within the DIN rail enclosure or housing. When deciding on the KBoxA-150-APL's orientation consider access to the front panel and to the external 2.5" HDD/SDD drive bay, if available.

To attach the DIN Rail mounting clamp, follow the steps below:


1. Make sure that the DIN Rail Mounting clamp is in the upper position, for the required mounting option.

Figure 13: DIN Rail Mounting Clamp Upper Position



2. Fasten the DIN rail clamp firmly to the chassis using the screws.supplied with the DIN rail mounting clamp.

Figure 14: DIN Rail Mounting Clamp Screw Dimensions (Measurements in mm)




Clip the top of the DIN rail clamp in to the DIN rail and push the bottom of the DIN rail firmly until it clamps on to the bottom of the DIN rail.

9.2. Power Connector

The KBox A-150-APL is connected by the input power connector on the front panel to a DC power source via a DC power supply wiring consisting of the Phoenix power mating connector (3-pin Phoenix PSC 1,5/3-F) delivered with the KBox A-150-APL and the assembled wires. For information on how to wire the connector, see Chapter 9.2.1: Wiring the DC Mating Power Connector.

Figure 15: Phoenix Power Mating Connector



- 1 3-pin Phoenix plug terminal
- 2 Cover over the slotted pan head screws
- 3 Location for inserting the functional earth wire
- 4 Location for inserting the 0 V wire
- 5 Location for inserting the 24 V wire

9.2.1. Wiring the DC Mating Power Connector

To wire the supplied 3-pin Phoenix PSC 1,5/3-F power mating connector, following the step below.

- 7. Cut three (1 mm^2) AWG18 isolated wires to the required length and strip each end 5 mm 7 mm.
- 2. Twist the striped wire-ends and provide them with ferrules.
- 3. Access the slotted pan head screws by opening the Phoenix Power Mating Connector cover (Figure 15, pos. 2).
- 4. Loosen the slotted pan head screws of the Phoenix power mating connector far enough so that you can insert the end of the prepared wires.
- 5. Insert the wires into the corresponding clamp of the Phoenix power mating connector. Make sure that you have the right polarity of the connection. For the pin assignment of the input power connector, refer to Chapter 12.2.1: Input Power Connector].
- 6. Fasten the screws to secure the wires into the Phoenix power mating connector's clamps.
- 7. Close the Phoenix Power Mating Connector cover (Figure 15, pos. 2).



The wires used for power connections must be clearly marked (+/-/functional earth) to ensure proper connection to the front panel input power connector and to the main power source. In addition, the cables must have some form of support to minimize the strain on the unit's connectors.

10/ Starting Up

Before using the system, become familiar with the system components and follow the startup instructions below.

10.1. Connecting to Power Supply

The KBox A-150-APL connects to a DC main power supply via a Phoenix input power connector on the front panel and corresponding power cable.



When starting the KBox A-150-APL, the functional earth connection must always be made first and disconnected last. Kontron recommended that the last connections attached to the system should be the power cable. Following a proper cabling procedure will prevent a false power-on condition, which could result in an operational failure.

ACAUTION

The KBox A-150-APL must be connected to a DC mains power supply complying with the SELV (Safety Extra Low Voltage) requirements of EN 60950-1 standard. It must be observed that wiring and short-circuit/overcurrent protection is performed according to the applicable standards, regulations and respect to the electrical specification of the KBox A-150-APL. The disconnecting device (fuse/circuit breaker) rating must be in accordance with the KBox A-150-APL's wire cross-section.

To start the KBox A-150-APL, follow the steps below:

- Ensure that the DC power source is switched off via a disconnecting device (circuit breaker), in order to ensure
 that no power is flowing from the external DC power source during the connection procedure.
- 2. Connect the protective earth stud bolt to an appropriate common earth connection point.
- 3. Connect the supplied Phoenix PSC 1,5/3-F power connector with wiring (refer to Chapter 9.2: Power Connector and Chapter 9.2.1: Wiring the DC Mating Power Connector) to the Input power connector located on the front panel, see Figure 4: Front Panel (pos. 1). Pay attention to the polarity of the connections. For more information on the input power connector's polarity, see Chapter 12.2.1: Input Power Connector.
- 4. Connect the DC power cable's other end to the DC main power supply.
- 5. Switch on the disconnecting device (circuit breaker) in order to apply voltage to the KBox-A-150-APL.

10.1.1. Power-On Switch

A Power-on switch is available on the front panel, to apply power or perform an orderly shutdown without data loss see Figure 4 (pos.7).



Do not disconnect the power from KBox A-150-APL while KBox A-150-APL is powered up! Performing a forced shutdown can lead to loss of data or other undesirable effects!

10.2. Operating System (OS) and Drivers


The standard KBox-A-150-APL is fully operational when switched on for the first time with pre-installed OS and drivers. Drivers are available from Kontron's EMD customer section.

If ordered without pre-installed OS, before starting the KBox A-150-APL the operating system and the appropriate drivers need to be installed for the ordered system configuration.

11/Technical Data

11.1. Block Diagram

Figure 16: Block Diagram

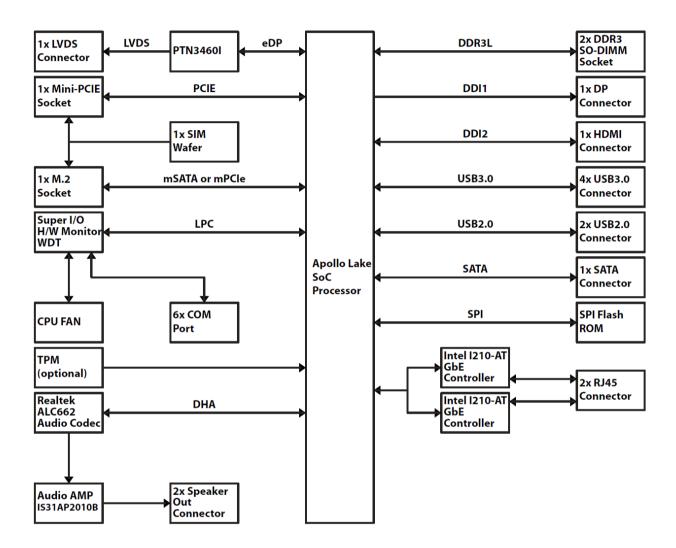

11.2. Technical Specification

The KBox A-150- APL implements the following mainboard technical specification.

Table 4: Technical Specification

Processor	Intel® Pentium® Quad Core™ N4200	
	1.1 GHz /2.5 GHz (Burst)	
System Memory	Up to 16 GB Max. with 2x DDR3L 1867 SODIMM	
Storage	Up to 512 GB Max M.2 SSD	
	2.5" slim SSD driv bay (optional)	
Audio	Optional	
Interfaces	4x USB 3.0	
	2x LAN (GbE)	
	1x HDMI	
	1x DP	
	2x COM (RS 232, RS422, RS485, BIOS configurable)	
	2x COM (RS232 option)	
Expansion Sockets	1x mPCle	
Power	9 VDC - 30 VDC Input	

Table 5: Software Specification

Operating System (OS)	Windows 10 IoT Enterprise (64 bit)	
	Linux Ubuntu 16.xx (64 bit)	
BIOS	AMI uEFI BIOS, Aptio V5	

11.3. Mechanical Specification

Table 6: Mechanical Specification

Dimensions	KBox A-150-APL (with HDD/SSD Drive Bay)	KBox A-150-APL (no HDD/SSD Drive Bay)
Width	180 mm (7.09")	180 mm (7.09")
Depth	134 mm (5.28")	134 mm (5.28")
Height	58 mm (2.28")	50 mm (1.97")
	(with external 2.5" SSD Drive Bay)	(without external 2.5" SSD Drive Bay)
Weight (chassis only)	Approx. ~1 kg (~2.2 lbs.)	Approx. ~1 kg (~2.2 lbs.)
Construction	Steel chassis	Steel chassis
Mounting	DIN Rail	DIN Rail
Color	RAL7035 (Front panel)	RAL7035 (Front panel)
	RAL7043 (Top cover and main chassis)	RAL7043 (Top cover and main chassis)
	Cooling fins, black	Cooling fins, black

For more detailed mechanical information, refer to the outline dimensions drawings within this chapter. Each dimension drawing shows the main external mechanical features such as the position and size of mounting holes for the DIN rail mounting clamp.

The following outline dimensions drawings shows the main external mechanical features for the KBoxA-150-APL with an external HDD/SSD drive bay.

Figure 17: Front Panel Dimensions with HDD/SSD Drive Bay (Measurements in mm)

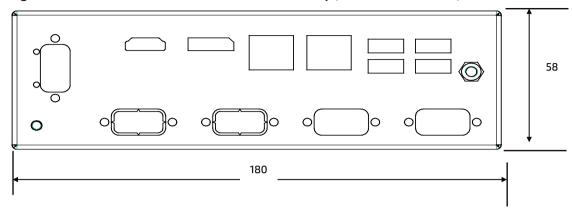


Figure 18: Rear Side Dimensions with HDD/SSD Drive Bay (Measurements in mm)



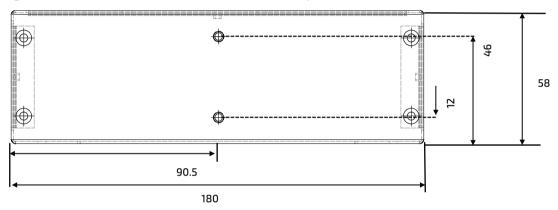


Figure 19: Top Side Dimensions with HDD/SSD Drive Bay (Measurements in mm)

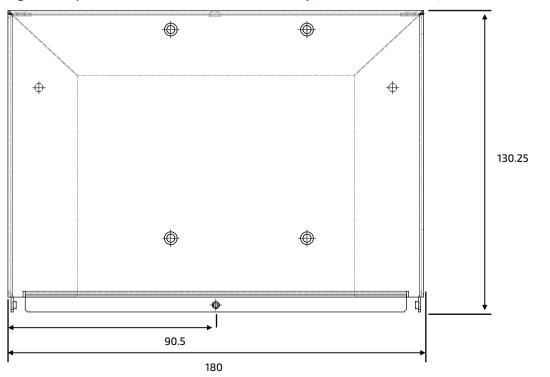

<u>www.kontron.com</u> // 36

Figure 20: Side View Dimensions with HDD/SSD Drive Bay (Measurements in mm)

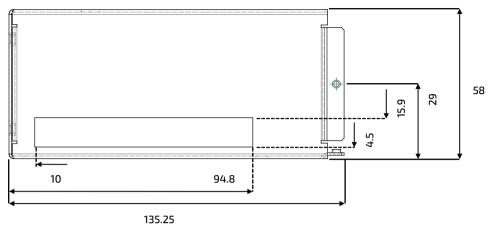

The following outline dimensions drawings shows the main external mechanical features for the KBoxA-150-BYT without an external HDD/SSD drive bay.

Figure 21: Front Panel Dimensions without HDD/SSD Drive Bay (Measurements in mm)

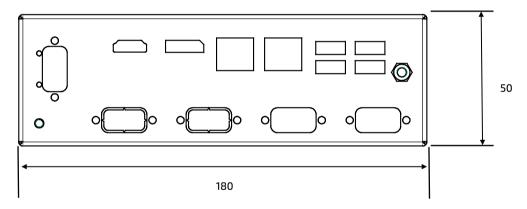


Figure 22: Rear Side Dimensions without HDD/SSD Drive Bay (Measurements in mm)

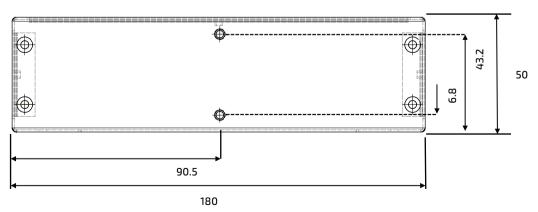


Figure 23: Top Side Dimensions without HDD/SSD Drive Bay (Measurements in mm)


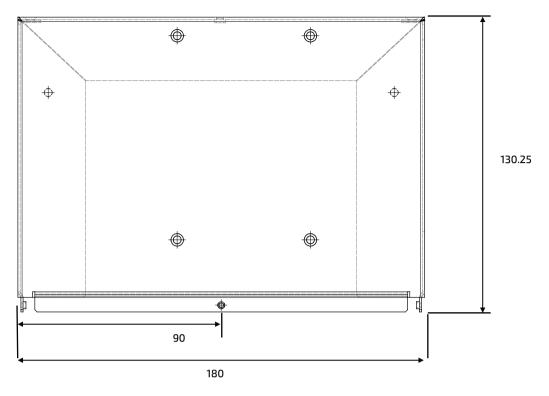


Figure 24: Side View Dimensions without HDD/SSD Drive Bay (Measurements in mm)

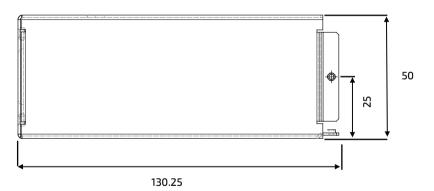

11.4. Power Specification

The KBox A-150-APL is powered by a 3-pin Input power connector on the front panel and has no internal power supply. The standard input voltage of 24 V DC is converted internal to 12 VDC using a converter, to supply the mainboard with +12 V DC. The mainboard generates all other required voltages.

NOTICE

Hot Plugging the power supply is not supported. Hot plugging might damage the board.

Table 7: Power Specification

Nominal Input Voltage	24 V DC
Input Voltage Range	9 V DC to 30 V DC
Input Power Connector	3-pin Phoenix PSC 1.5/3-M

11.4.1. Power Consumption

The power consumption of the KBox A-150-APL depends on the implemented mainboard capacity and external interfaces, for more information see Table 8: Power Consumption.

Table 8: Power Consumption

	Power Consumption	т.	una Labal Dating	
Mainboard (Burn-In) External Interfaces Total			'	ype Label Rating
100% RAM 100% CPU	4x USB 3.0 1x HDMI	Mainboard + External Interfaces	Voltage Current	30 V to 9 V (Max. range) 4.4 A (Max.)
9.7 W	1x DP 22.6 W	32.3 W	Power	33.9 W (32.3 W + 5%)

11.4.2. Protective Earth

There is a protective earth stud bolt on the front panel connected to the chassis GND inside the system. The position of the protective earth stud bolt varies depending on whether the KBox A-150-APL is delivered with an external 2.5" HDD/SSD drive bay see Figure 5 (pos. 2) or without an external 2.5" HDD/SSD drive bay, see Figure 4 (pos. 2).

11.5. Environmental Specification

Table 9: Environmental Specification

Temperature (Operating)	Standard (without heatsink)	0°C - 50°C ambient
	With heatsink	0°C - 50°C ambient
Relative Humidity (Operating)		10%-90% RH @ 39°C, non condensing

12/ Connector, Socket and Jumper Pin Assignments

Before changing any hardware settings read this chapter carefully. This chapter provided information regarding relevant connectors, sockets and jumpers.

12.1. Front Panel Connectors

Figure 25: Front Panel Connectors

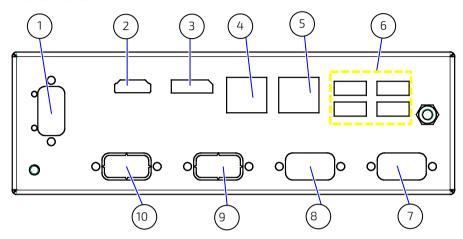


Table 10: Front Panel Connectors

Item	Label	Function	See Chapter
1	PWR	DC Power connector (3-pin Phoenix)	12.2.1
2	HDMI	HDMI connector	12.2.2
3	DP	Display Port connector	12.2.3
4	LAN 2	GbE LAN1 RJ-45 connector	12.2.4
5	LAN 1	GbE LAN2 RJ-45 connector	
6	USB1	USB3.0 Port 0 connectors	12.2.5
7	X1	COM1 connector	12.2.6
8	X2	COM2 connector	
9	Х3	COM3 (option)	
10	X4	COM3 (option)	

12.2. Front Panel Connector Pin Assignments

12.2.1. Input Power Connector

3-Pin Power		Pin	Signal Name
1 3	Phoenix Connector	1	GND
PSC 1.5/3-M	2	Functional earth	
		3	VCC

<u>www.kontron.com</u> // 40

12.2.2. HDMI Connector (HDMI)

19-pin HDMI	Pin	Signal Name
	1	TMDS Data2+
	2	GND
	3	TMDS Data2-
18 2	4	TMDS Data1+
	5	GND
	6	TMDS Data1-
	7	TMDS Data0+
	8	GND
	9	TMDS Data0-
	10	TMDS Clock+
	11	GND
	12	TMDS Clock-
	13	Reserved
	14	Reserved
	15	DDC_CLK
	16	DDC_DATA
	17	GND
	18	+5V Power
	19	Hot Plug Detect

12.2.3. Display Port Connector (DP)

20-pin VGA	Pin	Signal Name	Pin	Signal Name
	1	TX0+	11	GND
19 1	2	GND	12	TX3-
	3	TX0-	13	GND
	4	TX1+	14	GND
	5	GND	15	AUX+
20 2	6	TX1-	16	GND
	7	TX2+ -	17	AUX-
	8	GND	18	HPD
	9	TX2-	19	GND
	10	TX3+	20	PWR

12.2.4. GbE RJ45 Connectors (LAN1, LAN2)

RJ45 (female)	Pin	Signal Name	Pin	Signal Name
	1	TX1+	5	TX3-
	2	TX1-	6	TX2-
	3	TX2+	7	TX4+
	4	TX3+	8	TX4+

Left LED: Activity / Link		Right LED: Activity 10/100/1000		
Off	NO LAN connectivity	Off 10 Mbit		
Yellow	Link	Green 100 Mbit		
Blinking	Activity	Orange 1 GbE		

12.2.5. USB 3.0 Port

USB 3.0 Port	Pin	Signal Name	Pin	Signal Name
	1	+USB_VCC ⁽¹⁾	5	USB_RX-
9 8 7 6 5	2	Dat-	6	USB_RX+
	3	Date+	7	GND
	4	GND	8	USB_TX-
			9	USB_TX+

⁽¹⁾ The power source of +USBVCC can be selected by JP9.

12.2.6. Serial Port Connectors (X1, X2)

Serial Port	Pin	RS232	R5422	RS 485 Half Duplex	RS 485 Full Duplex
	1	DCD	Tx-	Data-	Tx-
	2	RxD	Tx+	Data+	Tx+
6 g	3	TxD	Rx+		Rx+
	4	DTR	Rx-		Rx-
р <u>г</u>	5	GND	GND	GND	GND
	6	DSR			
	7	RTS			
	8	CTS			
	9	RI			

<u>www.kontron.com</u> // 42

12.3. Internal Connectors and Sockets

Figure 26: Internal Connectors Top View

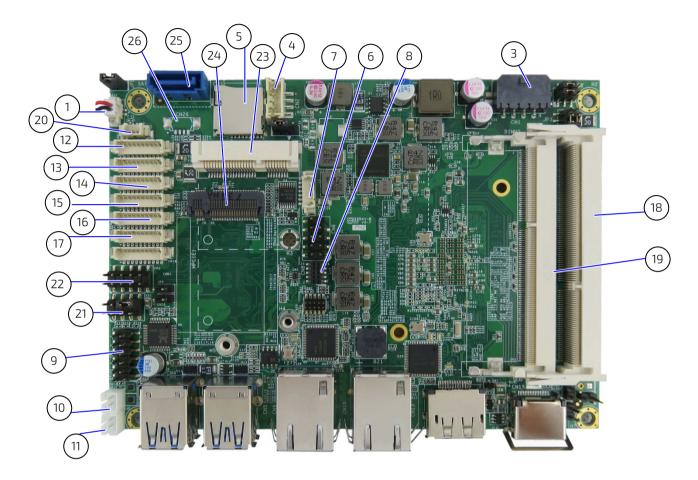


Table 11: Internal Connectors Top side

Item	Function
1	Battery power Input
	Onboard Buzzer
3	DC12V Power Input
4	HDD Power Output
5	Micro-SD Card Cage
6	USB2.0 Port PORT4,5 Pin Header
7	SIM Interface for MPCIE1 and M2 KEY B
8	P80_Header
9	Audio Input / Output Pin Header
10	Left Channel 3W Audio AMP Output
11	Right Channel 3W Audio AMP Output
12	COM1 RS-232/422/485 Port
13	COM2 RS-232/422/485 Port

14	RS-232 Port 3
15	RS-232 Port 4
16	RS-232 Port 5
17	RS-232 Port 6
18	DDR3L Memory SO-DIMM Socket
19	DDR3L Memory SO-DIMM Socket
20	DC5V FAN
21	Front Panel 1 Pin Header
22	Front Panel 2 Pin Header
23	Mini-PCI Express v1.2 Socket (Full Size)
24	M2 KEY B Socket
25	Serial ATA Port 0 Connector
26	USB2.0 Port 2 Pin Header (Option- empty in Figure 26: Internal Connectors Top View)
	Backlight Power Output (rear side)
	18/24-bit, 1/2-channel LVDS Panel Connector (rear side)

12.4. Internal Connector and Socket Pin Assignments

12.4.1. 12 V DC Out Power Connector

An internal 24 V DC to 12 V DC converter board converts the nominal Input voltage of 24 V DC from the front panel Input power connector, to 12 V DC. System Internal component are supplied from the internal 4-pin 12 V DC out power connector.

4-pin Power	Pin	Signal Name
/ Page 1	1	+12 V
	2	GND
	3	GND
	4	+12V

12.4.2. Battery Power Input Connector

	Pin	Signal Name
	1	+Battery[¹]
2	2	-Battery[¹]

[1] Internal lithium battery CR2032 signal

12.4.3. HDD Power Output Connector

Pin	Signal Name
1	+12 V
2	GND
3	GND
4	+5V

12.4.4. Front Panel 1-Pin Header

	Pin	Signal Name	Pin	Signal Name
	1	Reset Button +	2	Speaker+
RSTBTN + 1 0 2 + SPKR	3	Reset Button -	4	NC
HLED + 700 8 -	5	HDD LED+	6	Internal Speaker-[¹]
- 7000	7	HDD LED-	8	Speaker- [1]

^[1] Internal buzzer enabled by shorting pin 6 and pin 8.

12.4.5. Front Panel 2-Pin Header

	Pin	Signal Name	Pin	Signal Name
+ 1 0 2 + PWRBTN	1	Power LED +	2	Power Button +
PLED X 0 - 11116	3	NC	4	Power Button -
KLOCK + OO SMD	5	Power LED -	6	SMBALERT#
0[0]0]10 00	7	BatLow#	8	SMBus DATA
	9	GND	10	SMBus Clock

12.4.6. Serial ATA Port 0 Connector

	Pin	Signal Name
	1	GND
line 1	2	TX+
	3	TX-
	4	GND
10 Jan	5	RX+
	6	RX-
	7	GND

12.4.7. USB 2.0 Port Pin Header (option)

	F		Signal Name	Pin	Signal Name
1		1	+USBVCC[¹]	2	+USBVCC[¹]
	0 0	3	USB_A-	4	USB_B-
	0 0	5	USB_A+	6	USB_B+
		7	GND	8	GND
		9	KEY	10	GND

^[1] Power source of +USBVCC can be selected by USB Power Selection jumper (JP9).

12.4.8. mPCle Express V 1.2 Socket

	Signal Name	Pin	Pin	Signal Name
-1	WAKE#	1	2	+3.3 VSB
PIN 2	Reserved	3	4	Ground
	Reserved	5	6	+1.5 V
	CLKREQ#	7	8	UIM_PWR ^[1]
	Ground	9	10	UIM_DATA ^[1]
	REFCLK-	11	12	UIM_CLK ^[1]
	REFCLK+	13	14	UIM_RESET ^[1]
	Ground	15	16	UIM_VPP ^[1]
	Reserved	17	18	Ground
	Reserved	19	20	W_Disable#
	Ground	21	22	PERST#
	PERn0	23	24	+3.3 VSB
	PERp0	25	26	Ground
	Ground	27	28	+1.5 V
2	Ground	29	30	SMB_CLK
PIN 51	PETn0	31	32	SMB_DATA
	PETp0	33	34	Ground
	Ground	35	36	USB_D-
	Ground	37	38	USB_D+
	+3.3 VSB	39	40	Ground
	+3.3 VSB	41	42	LED_WWAN#
	Ground	43	44	LED_WLAN#
	Reserved	45	46	LED_WPAN#
	Reserved	47	48	+1.5 V
	Reserved	49	50	Ground
	Reserved	51	52	+3.3 VSB

^[1] These pins are connected to the SIM Interface wafer directly.

12.4.9. M.2 Key B Socket

	Signal Name	Pin	Pin	Signal Name
[CONFIG3	1	2	+3.3V
2	GND	3	4	+3.3V
	GND	5	6	FULL CARD PWR OFF
T T	USB-D+	7	8	W DISABLE#1
	USB-D-	9	10	GPI09
	GND	11	12	KEY B
	KEYB	13	14	KEY B
	KEYB	15	16	KEY B
	KEYB	17	18	KEY B
	KEYB	19	20	GPI05
	CONFIO	21	22	GPI06
	GPI011	23	24	GPI07
74	GPI012	25	26	GPI010
D	GND	27	28	GPI08
	NC	29	30	UIM RESET ^[1]
	NC	31	32	UIM CLK ^[1]
	GND	33	34	UIM DATA ^[1]
	NC	35	36	UIM PWR ^[1]
	NC	37	38	DEVSLP
	+3.3V	39	40	GPI00
	PETn0/SATAB+	41	42	GPI01
	PETn0/SATAB-	43	44	GPI02
	NC	45	46	GPIO3
	PETn0/SATAA-	47	48	GPI04
	PETn0/SATAA+	49	50	PERST
	GND	51	52	CLKREQ
	REFCLKN	53	54	PEWAKE
	REFCLKP	55	56	MFG_DAT
	GND	57	58	MFGCLK
	ANTCTL	59	60	COEX
	ANTCTL	61	62	COEX
	ANTCTL	63	64	COEX
	ANTCTL	65	66	SIM DETECT
	PER1-	67	68	SUSCLK
	CONFIG1	69	70	+3.3V
	GND	71	73	+3.3V
	GND	73	75	+3.3V
	Config2	75		

 $^{{}^{[1]}\!\}mathsf{These}$ pins are connected to the SIM Interface wafer directly

12.5. Jumpers

Figure 27: Jumper Location

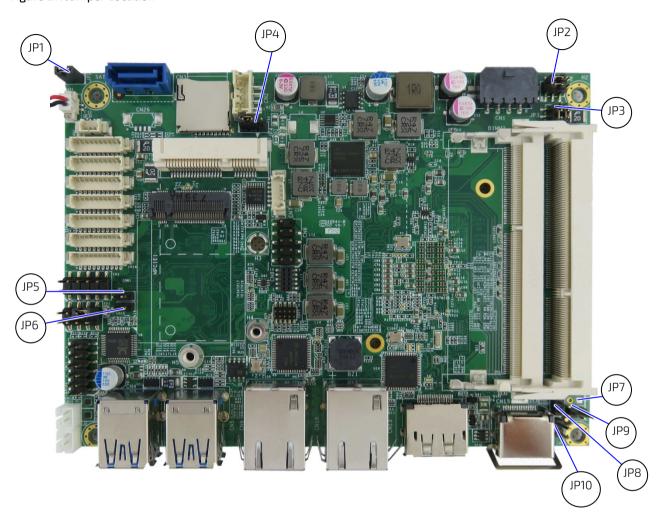


Table 12: Jumpers

Label	Function		
JP1	SIM CARD SELECTION		
JP2	Backlight Enable Selection		
JP3	Panel & Backlight Power Selection		
JP4	AT / ATX Power Mode Selection		
JP5	M2 KEY B LED Pin Header		
JP6	MPCIE Activity LED Pin Header		
JP7	NC		
JP8	RTC Reset Selection		
JP9	USB Power Selection		
JP10	ME F/W Selection		

12.6. Jumper Pin Assignments

12.6.1. SIM Card Selection (JP1) Pitch 2.54 mm

	Jumper	Status
1 0	1-2 open	M.2 KEY-B
2 0	1-2 short	MPCIE (Default)

12.6.2. Backlight Enable Selction (JP2) Pitch 2.00 mm

	Jumper	Setting	Status
1 0 0 1	1	1-3	Backlight Enable Level = +3.3 V
		3-5	Backlight Enable Level = +5 V
	2	2-4	Backlight Enable Active High
	<u> </u>	4-6	Backlight Enable Low Activ

12.6.3. Panel & Backlight Power Selection (JP3) Pitch 2.0 mm

	Jumper	Setting	Status
1 O O 5	1	1-3	Backlight Enable Level = +12 V
		3-5	Backlight Enable Level = +5 V
	2	2-4	Backlight Enable = +3.3 V
		4-6	Backlight Enable = +5 V

12.6.4. AT/ATX Power Mode Selection (JP4) Pitch 2.54 mm

	Jumper	Status
1 2	1-2 short	AT Mode
O 3	2-3 short	AT Mode (default)

12.6.5. M2 Key B LED (JP5) Pitch 2.54 mm

	Pin	Status
1 🗆	1	LED+
2 0	1	LED-

12.6.6. MPCIE Activity LED (JP6) Pitch 2.54 mm

	Pin	Status
1 🗇	1	LED+
2 0	1	LED-

12.6.7. RTC Reset selection (JP8) Pitch 2.54 mm

		Jumper	Status
ſ	1 🗖	1-2 open	Normal
	2 0	1-2 short	Clear CMOS

12.6.8. USB Power Selection (JP9) Pitch 2.00 mm

	Jumper	Status
1 🗆	1-2 open	USB power will be cut off in S4 & S5 state.
2 0	1-2 short	USB power is always supply.

12.6.9. ME F/W Selection (JP10) Pitch 2.54 mm

		Jumper	Status
	1 🗆	1-2 open	Normal operation
2 0	2 0	1-2 short	ME F/W Disabled

13/ **BIOS**

The KBox-A-150-APL uses the AMI uEFI BIOS supported by the mainboard and based on the Unified Extensible Firmware Interface (uEFI) specification and the Intel® Platform Innovation Framework for EFI. The AMI uEFI BIOS preferences are preset and do not require further adjustment for operation. The AMI BIOS setup menus and available selection may vary. The uEFI BIOS features enhanced functions specifically tailored to the KBox A-150-APL's hardware features:

- Configurable COMs (RS232, RS422, RS485)
- Configurable power settings

For specific Information on the BIOS for your product, contact Kontron Support.



The BIOS Information covered in this user guide might not the latest version. The latest version might have certain differences to the BIOS options and features described in this chapter. For the BIOS Information specific for your product, please contact Kontron Support.

13.1. Starting the uEFI BIOS

The uEFI BIOS comes with a Setup program that provides quick and easy access to the individual function settings for control or modification of the uEFI BIOS configuration. The Setup program allows for access to various menus that provide functions or access to sub-menus with further specific functions of their own.

To start the uEFI BIOS Setup program, follow the steps below:

- 1. Power on the board.
- 2. Wait until the first characters appear on the screen (POST messages or splash screen).
- *3.* Press the key.
- 4. If the uEFI BIOS is password-protected, a request for password will appear. Enter either the User Password or the Supervisor Password, press <RETURN>, and proceed with step 5.
- 5. The BIOS setup utility appears in the Main menu

Using the hot key navigation system users can navigate through the BIOS. The hot key legend bar is located at the bottom of the Setup screens. The following table provides a list of navigation hot keys available in the legend bar.

Table 13: Navigation Hot Keys Available in the Legend Bar

Sub-screen	Description			
<f1></f1>	<f1> key invokes the General Help window</f1>			
<->	<minus> key selects the next lower value within a field</minus>			
<+>	<plus> key selects the next higher value within a field</plus>			
<f2></f2>	<f2> key loads previous values</f2>			
<f3></f3>	<f3> key loads optimized defaults</f3>			
<f4></f4>	<f4> key Saves and Exits</f4>			
<→> or <←>	<left right=""> arrows selects major Setup menus on menu bar, for example, Main or Advanced</left>			
<^> or <↓>	<up down=""> arrows select fields in the current menu, for example, Setup function or sub-screen</up>			
<esc></esc>	<esc> key exits a major Setup menu and enters the Exit Setup menu</esc>			
	Pressing the <esc> key in a sub-menu displays the next higher menu level</esc>			
<return></return>	<return> key executes a command or selects a submenu</return>			

<u>www.kontron.com</u> // 51

13.2. Setup Menus

The Setup utility features menus listed in the selection bar at the top of the screen are:

- Main
- Advanced
- Power
- Boot
- Security
- Save & Exit

The currently active menu and the currently active BIOS Setup item are highlighted in white. Use the left and right arrow keys to select the Setup menus.

Each Setup menu provides two main frames. The left frame displays all available functions. Configurable functions are displayed in blue. Functions displayed in grey provide information about the status or the operational configuration. The right frame displays an explanation of the respective function in a help window.

13.2.1. Main Setup Menu

Figure 28: Main Setup Menu Example

	BIOS SETUP UTILITY					
Main	Advanced	Power	Boot	Security	Save & Exit	
Product Information Product Name BIOS Version BIOS Build DITEX FW Version CPU Information Intel® Pentiu Microcode Reprocessor Company Product Name Processor Company Name Product Name Prod	Intercet Information Intercet Name		Select Screen			
Memory Infor Total Size Frequency System date System time Access Level		1600 Mi	/17/2017] 9]	Enter +/-: C F1: G F2: F F3: C	elect Item r: Select Change Opt. General Help Previous Values Optimized Defaults save & Exit	
	Version 2.18.	1263. Copyright	(C) 2017, Ame	rican Megatrends, Ir	nc.	

The Main Menu provides an overview of the system information and enables users to set the System date and time.

13.2.2. Advanced Setup Menu

Figure 29: Advanced Setup Menu Example

	BIOS SETUP UTILITY					
Main	Advanced	Power	Boot	Securit	ty Save & Exit	
Onboard LAI Audio Contro > Display Co > Super IO C	onfiguration Configuration set Configuration figuration guration guration tack	[Ena	abled] abled] abled]	↑ E + F F	→ ←: Select Screen ↓: Select Item Enter: Select -/-: Change Opt: General Help	
Version 2.18.1263. Copyright (C) 2017, American Megatrends, Inc.						

The following table gives more information for important setup options within the Advanced Menu. Default setting are displayed in **bold**.

Table 14: Advanced Menu

Sub-screen	Additional Sub-screens with	n Description	
Onboard LAN 1 Controller	[Enabled, Disabled]		
Onboard LAN 2 Controller	[Enabled, Disabled]		
Audio Controller	[Enabled, Disabled]		
Display	Primary Display	[IGD, PCIe]	
Configuration	UMA Frame Buffer Size	[128MB, 256MB , 512MB]	
	DVMT Pre-Allocated	[64M, 96M, 128M, 160M, 192M, 224M, 256M, 288M, 320M, 352M, 384M, 416M, 448M, 480M, 512M]	
	DVMT Total Gfx Mem	[128M, 256M , MAX]	
	Active LVDS	[Enabled, Disabled]	
	PWM Backlight Control	[By External, By Internal]	
	LVDS Backlight Control – PWM	[0 255]	
	LVDS Backlight Control – Voltage	[0.0V, 0.5V, 1.0V, 1.5V, 2.0V, 2.5V, 3.0V, 3.5V, 4.0V, 4.5V, 5.0V]	
	Additional information: Display Resolution: 10.4" > 800 × 600 12.1" > 800 × 600 / 1280×800)	

Sub-screen	Additional Sub-screens with	n Description				
Display Configuration (continued)	15" > 1024 x 768 15.6" > 1366 x 768 15.6" > 1920 x 1080 18.5" > 1366 x 768 21.5" > 1920 x 1080					
Super IO	Serial Port Configuration	Serial Port	[Enabled , Di	sabled]		
Configuration		Change Settings	[Auto]			
		Device Settings	10=2F8h; IRQ 10=3E8h; IRQ	Q=4 ; Q=3, 4, 5, 6, 7, 9, 10, 11, 12; Q=3, 4, 5, 6, 7, 9, 10, 11, 12; Q=3, 4, 5, 6, 7, 9, 10, 11, 12; Q=3, 4, 5, 6, 7, 9, 10, 11, 12;		
		Change Settings	[Auto]			
		Serial Port 1 Type	[RS232 , RS4	22, RS485]		
l			RS485	[Half Duplex, Full Duplex]		
			RS485 Auto flow Control	[Disabled, Enabled]		
	Serial Port 2 Configuration	Serial Port	[Enabled, Di	sabled]		
		Device Settings	10=2F8h; IRQ 10=3E8h; IRQ	Q=3; Q=3, 4, 5, 6, 7, 9, 10, 11, 12; Q=3, 4, 5, 6, 7, 9, 10, 11, 12; Q=3, 4, 5, 6, 7, 9, 10, 11, 12; Q=3, 4, 5, 6, 7, 9, 10, 11, 12		
		Change Settings	[Auto]			
		Serial Port 2 Type	[RS232 , RS422, RS485]			
			RS485	[Half Duplex, Full Duplex]		
			RS485 Auto flow Control	[Disabled, Enabled]		
	Serial Port 3 Configuration	Serial Port	standard pro	sabled] ort is not connected on the oduct but is optional due to on the front panel.		
		Device Settings	10=2E8h; IRQ 10=2F0h; IRQ			
		Change Settings	[Auto]			

Sub-screen	Additional Sub-screens with	Description	
Super IO Configuration (continued)	Serial Port 4 Configuration	Serial Port	[Enabled, Disabled] This serial port is not connected on the standard product but is optional due to a breakout on the front panel
		Device Settings	The options are: IO=2E8h; IRQ=7; IO=3F8h; IRQ=3, 4, 5, 6, 7, 9, 10, 11, 12; IO=2F8h; IRQ=3, 4, 5, 6, 7, 9, 10, 11, 12; IO=3E8h; IRQ=3, 4, 5, 6, 7, 9, 10, 11, 12; IO=2E8h; IRQ=3, 4, 5, 6, 7, 9, 10, 11, 12; IO=2F0h; IRQ=3, 4, 5, 6, 7, 9, 10, 11, 12; IO=2E0h; IRQ=3, 4, 5, 6, 7, 9, 10, 11, 12;
		Change Settings	[Auto]
	Serial Port 5 Configuration	Serial Port	[Enabled, Disabled] This serial port is not connected on the standard product but is optional due to a breakout on the front panel
		Device Settings	The options are: IO=2F0h; IRQ=7; IO=3E8h; IRQ=3, 4, 5, 6, 7, 9, 10, 11, 12; IO=2E8h; IRQ=3, 4, 5, 6, 7, 9, 10, 11, 12; IO=2F0h; IRQ=3, 4, 5, 6, 7, 9, 10, 11, 12; IO=2E0h; IRQ=3, 4, 5, 6, 7, 9, 10, 11, 12;
		Change Settings	[Auto]
	Serial Port 6 Configuration	Serial Port	[Enabled, Disabled] This serial port is not connected on the standard product but is optional due to a breakout on the front panel
		Device Settings	The options are: IO=2E0h; IRQ=7; IO=3E8h; IRQ=3, 4, 5, 6, 7, 9, 10, 11, 12; IO=2E8h; IRQ=3, 4, 5, 6, 7, 9, 10, 11, 12; IO=2F0h; IRQ=3, 4, 5, 6, 7, 9, 10, 11, 12; IO=2E0h; IRQ=3, 4, 5, 6, 7, 9, 10, 11, 12;
		Change Settings	[Auto]
CPU Chipset	EIST	[Enabled, Disabled]	
Configuration	Turbo Mode	[Enabled , Disabled]	
	Active Processor Cores	[Enabled, Disabled]	
	Intel ® Virtualization Tech	[Enabled , Disabled]	
	VT-d	[Enabled , Disabled]	
	C-States	[Enabled , Disabled]	
SATA Configuration	SATA Controller	[Enabled, Disabled]	
Comingui ation	SATA Mode Selection	[AHCI Mode]	

Sub-screen	Additional Sub-screens wit	h Description		
SATA	Serial ATA Port 1			
Configuration (continued)	Port 1	[Enabled , Disabled]		
(201121111202)	mSATA Port 1			
	Port 1	[Enabled , Disabled]		
USB Configuration	Read only field Displays the attached USB of	levices		
	Legacy USB Support	[Enabled, Disabled]		
	XHCI hand-off	[Enabled , Disabled]		
	USB Mass Storage Driver Support	[Enabled, Disabled]		
Trusted Computing	Security Device Support	[Enabled, Disabled] Note: Enabled is customer se	etting, Disabled is BIOS default	
	SHA-1 PCR Bank	[Enabled , Disabled]		
	SHA256 PCR Bank	[Enabled, Disabled]		
	Pending Operation	[None, TPM Clear]		
	Platform Hierarchy	[Enabled, Disabled]		
	Storage Hierarchy	[Enabled , Disabled]		
-	Endorsement Hierarchy	[Enabled, Disabled]		
	TPM2.0 UEFI Spec Version	[TCG_1_2; TCG_2]		
	Physical Presence Spec Version	[1.2, 1.3]		
DIO Configuration	User Configured	[Enabled , Disabled]		
	DIO-0 Value	[1]		
	DIO-1 Value	[1]		
	DIO-2 Value	[1]		
	DIO-3 Value	[1]		
	DIO-4 Value	[1]		
	DIO-5 Value	[1]		
	DIO-6 Value	[1]		
	DIO-7 Value	[1]		
Network Stack	Network Stack	[Enabled, Disabled]		
	Ipv4 PXE Support	[Enabled, Disabled]		
	Ipv6 PXE Support	[Enabled, Disabled]		
H/W Monitor	Smart FAN Configuration	CPU FAN Setting	[Manual , Smart]	
		Manual Duty	(0- 255 PWM Duty)	
THE VIOLET	Read only field	_	(0- 255 PWM Du	

13.2.3. Power Configuration Menu

Figure 30: Power Configuration Setup Menu Example

		BIOS	SETUP UTILIT	Υ		
Main	Advanced	Power	Boot	Secu	rity	Save & Exit
Power Configura ACPI Sleep Stat Restore AC Pow Power Saving M Resume Event (Resume By LAN Resume By LAN Resume By MP	te ver Loss lode Control N 1 Device N 2 Device CIE1 Device	[Power Off [EUP Enab [Disabled] [Disabled] [Disabled]	=		↑↓: Seled Enter: S +/-: Cha F1: Gen F2: Prev	
Resume By M2 Resume By Ring Resume By RT0 >WatchDog Tim	g Device C Alarm er Configuration	[Disabled] [Disabled] [Disabled]			F4: Save ESC: Ex	e & Exit kit
	Version 2.18.	1263. Copyright ((C) 2017, Ameı	rican Mega	trends, Inc	· ·

The following table gives more information for important setup options within the Power Configuration Menu. Default setting are displayed in **bold**.

Table 15: Power Configuration Setup Menu

Sub-screen	Additional Sub-screens with Description			
Power	ACPI Sleep State	[S3 (Suspend to RAM)]		
Configuration	Restore AC Power Loss	[Power Off, Power On , Last Sta	te]	
Power Saving Mode [EUP Enabled, Disabled]				
	Resume Event Control	Resume Event Control		
	Resume By LAN1 Device	ne By LAN1 Device [Enabled, Disabled]		
	Resume BY LAN 2 Device	[Enabled, Disabled]		
	Resume By MPCIE1 Device	[Enabled, Disabled]		
	Resume By M2 Device	[Enabled, Disabled]		
	Resume By Ring Device	[Enabled, Disabled]		
	Watchdog Timer Configuration	WDT Function	[Enabled, Disabled]	

13.2.4. Boot Setup Menu

Figure 31: Boot Setup Menu Example

		BIOS S	ETUP UTILIT	Υ	
Main	Advanced	Power	Boot	Secu	urity Save & Exit
Boot Configu Full Screen L Setup Promp Bootup Numl CSM Support Boot Option F	OGO Display t Timeout ∟ock State t Filter	[Disabled] 1 [On] [Enabled] [UEFI only]			→ ←: Select Screen ↑↓: Select Item Enter: Select +/-: Change Opt. F1: General Help F2: Previous Values F3: Optimized Defaults F4: Save & Exit ESC: Exit
	Version 2.18.1263. Copyright (C) 2017, American Megatrends, Inc.				

The following table gives more information for important setup options within the Boot Menu. Default setting are displayed in **bold**.

Table 16: Boot Setup Menu Sub-screens and Functions

Function	Description
Full Screen LOGO Display	Full Screen LOGO Display Options: [Disabled, Enabled]
Setup Prompt Timeout	Displays number of seconds that the firmware waits for setup activation key The value 65535(0xFFFF) means an indefinite wait. [1]
Bootup NumLock State	Selects keyboard NumLock state [ON, OFF]
CSM Support	[Enabled, Disabled]
Boot Option Filter	[UEFI and legacy, Legacy only, UEFI only , Disabled]
Boot Option #1	Windows Boot manager

13.2.5. Security Setup Menu

Figure 32: Security Setup Menu Example

		BIOS	SETUP UTILI	TY			
Main	Advanced	Power	Boot	Secu	urity	Save 8	& Exit
Setup and is If ONLY the must be en Administrate The passwor Minimum Ler Maximum ler	Administrator's password sonly asked for when e User's password is settered to boot or enteror rights d length must be in the lighth 20 strator Password ord	entering Setup t, then this is a r Setup. In Se e following range	power on passetup the User	sword and will have	F4: Save & ESC: Exit	tem ct e Opt. il Help is Values red Defaults Exit	
	Version 2.18.	1263. Copyright	(C) 2017, Am	erican Meg	atrends, Inc.		

The following table gives more information for important setup options within the Security Menu. Default setting are displayed in **bold**.

Table 17: Security Setup Menu Sub-screens and Functions

Function	Description			
Administrator Password	Sets administrator password			
User Password	Sets user password	Sets user password		
HDD Security Configuration	Read Only Information Allows access to set, modify and clear Hard Disk user and master passwords. User Passwords need to be installed for Enabling Security. Master Password can be modified only when successfully unlocked with the Master Password in Post.			
Secure Boot	System Mode	Set up		
Menu	Secure Boot	Not active		
	Vendors Key	Not active		
	Attempt Secure Boot	[Enabled , Disabled]		
	Secure Boot Mode	[Standard, Custom]		
	Key Management	Provision Factory Defaults	[Enabled, Disabled]	
		Install Factory Default keys		
		Enroll Efi Image		
		Save all Secure Boot Variables		

Function	Description		
	Key Management	Platform Key (PK)	
Menu (continued)	(continuca)	Key Exchange Keys	
		Authorized Signatures	
		Forbidden Signatures	
		Authorized TimeStamps	
		OsRecovery Signatures	
	Additional Information: Only If "Boot Option Filter = "UEFI only" or "UEFI and Legacy"		

13.2.6. Save and Exit Set up Menu

Figure 33: Save and Exit Set up Menu Example

		BIOS	SETUP UTILI1	ΓΥ				
Main	Advanced	Power	Boot	Secui	rity	Save	&	Exit
_	les Inges				↑↓: Sele Enter: S +/-: Cha F1: Ger F2: Pre F3: Opt	Select ange Opt. neral Help vious Value imized Defa re & Exit	es	5
Version 2.18.1263. Copyright (C) 2017, American Megatrends, Inc.								

The following table gives more information for important setup options within the Save and Exit Menu. Default settings are displayed in **bold**.

Table 18: Save and Exit Setup Menu Sub-screens and Functions

Function	Description
Save Changes and Reset	Exits system after saving changes Once you are finished making your selections, choose this option to ensure the values you selected are saved to the CMOS RAM. The CMOS RAM is sustained by an onboard backup battery and stays on even when the PC is turned off. When you select this option, a confirmation window appears. Select [Yes] to save changes and exit.
Discard Changes and Reset	Exits system setup without saving changes Select this option only if you do not want to save the changes that you made to the Setup program. If you made changes to fields other than system date, system time, and password, the BIOS will asks for a confirmation before exiting.
Save Options	Saves changes made so far for any setup options
Save Changes	Saves changes made so far for any setup options
Discard Changes	Discards changes made so far to any of the setup values This option allows you to discard the selections you made and restore the previously saved values. After selecting this option, a confirmation appears. Select [Yes] to discard any changes and load the previously saved values.
Restore Defaults	Restores/loads standard default values for all setup options Load Optimal Default values for all the setup values This option allows you to load optimal default values for each of the parameters on the Setup menus, that provides the best performance settings The F9 key can be used for this operation. Load Failsafe Default values for all the setup values This option allows you to load failsafe default values for each of the parameters on the Setup menus, that provides the most stable performance settings. The F8 key can be used for this operation.

14/ Technical Support

For information on how to receive technical support, visit Kontron Support (http://www.kontron.com/support).

To request support via e-mail, report documentation errors, or general customer feedback, use Kontron's Contact Support Request Form by visiting:

http://www.kontron.com/about-kontron/company-overview/contact-us/forms/contact-support

In case the request form does not work or you do not get a response within 48 hours, send a follow up email to support@kontron.com

Make sure you have the following product identification information on hand when you call:

- Product name.
- Product model number
- Serial number (SN) of the unit

Be ready to explain the nature of your problem to the service technician.



The serial number can be found on the type label on the system.

14.1. Returning Defective Merchandise

All equipment returned to Kontron must have a Return of Material Authorization (RMA) number assigned exclusively by Kontron. Kontron cannot be held responsible for any loss or damage caused to the equipment received without an RMA number. The buyer accepts responsibility for all freight charges for the return of goods to Kontron's designated facility. Kontron will pay the return freight charges back to the buyer's location in the event that the equipment is repaired or replaced within the stipulated warranty period. Follow these steps before returning any product to Kontron.

1. Visit the RMA Information website:



Kontron's RMA Information website can be found at: http://www.kontron.com/support-and-services/support/rma-information

Download the RMA Request sheet for Kontron Europe GmbH - Augsburg and fill out the form. Take care to include a short detailed description of the observed problem or failure and to include the product identification (product name, material number and serial-number). If more than one product is sent in a delivery. Fill out the above information in the RMA Request form for each product.

- 2. Send the completed RMA-sheet to the given fax- or email-address at Kontron Europe GmbH. Kontron Europe GmbH will provide an RMA-Number within one business day.
- 3. The goods for repair shall be packed properly for shipping, considering shock- and ESD-protection.



Goods returned to Kontron Europe GmbH in non-proper packaging are considered as customer caused faults and cannot be accepted as warranty repairs.

4. Add the RMA-sheet to the relevant delivery address and include the RMA-No with the shipping paperwork. Sent the product to the following delivery address:

Kontron Europe GmbH RMA Support Lise-Meitner-Str. 3-5 86156 Augsburg Germany

Phone: +49 (0) 821 4086-0 Fax: +49 (0) 821 4086 111 Email: service@kontron.com

5. After Kontron Europe GmbH receives the product, a confirmation of the order is sent via email to the address named on the RMA sheet.

15/ Storage, Transportation and Maintenance

15.1. Storage

If the product is not in use for an extended period time, disconnect the power plug from the AC outlet .If it is necessary to store the product then re-pack the product as originally delivered to avoid damage. The storage facility must meet the products environmental requirements as stated within this user guide. Kontron recommends keeping the original packaging material for future storage or warranty shipments.

15.2. Transportation

To ship the product use the original packaging, designed to withstand impact and adequately protect the product. When packing or unpacking products always take shock and ESD protection into consideration and use an EOS/ESD safe working area.

15.3. Maintenance

Maintenance or repair on the open product may only be carried out by qualified personnel authorized by Kontron. Cleaning

- For light soiling, clean the product with a dry cloth.
- Carefully remove dust from the surface of the chassis and cooling fins using a clean, soft brush.
- Stubborn dirt should be removed using a mild detergent and a soft cloth



Do not use steel wool, metallic threads or solvents like abrasives, alcohol, acetone or benzene for cleaning the KBox A-150-APL

15.3.1. Replacing the Lithium Battery

The lithium battery must only be replaced with the same type of battery or with a type of battery recommended by Kontron. If the on-board Lithium battery needs to be replaced, follow the steps below:

- 1. Remove the lithium battery from the holder by pulling it outwards.
- 2. Place a new lithium battery in the battery holder.
- 3. Pay attention to the polarity of the battery.



Danger of explosion when replacing with wrong type of battery. Replace only with the same or equivalent type recommended by the manufacturer. The lithium battery type must be UL recognised.



Do not dispose of lithium batteries in general trash collection. Dispose of the battery according to the local regulations dealing with the disposal of these special materials, (e.g. to the collecting points for dispose of batteries).

16/ Warranty

Kontron defines product warranty in accordance with regional warranty definitions. Claims are at Kontron's discretion and limited to the defect being of a material nature. To find out more about the warranty conditions and the defined warranty period for your region, following the steps below:

- 1. Visit Kontron's Term and Conditions webpage.
 - http://www.kontron.com/terms-and-conditions
- 2. Click on your region's General Terms and Conditions of Sale.



The KBox A-150-APL is factory configured to meet customer requirements. Kontron does not recommend opening the system as this may cause damage to internal components.

16.1. Limitation/Exemption from Warranty Obligation

In general, Kontron shall not be required to honor the warranty, even during the warranty period, and shall be exempted from the statutory accident liability obligations in the event of damage caused to the product due to failure to observe the following:

- ► General safety instructions for IT equipment within this user guide
- Warning labels on the product and warning symbols within this user guide
- Information and hints within this user guide

Additionally, alterations or modifications to the product that are not explicitly approved by Kontron, described in this user guide, or received from Kontron Support as a special handling instruction will void your warranty.

Within the warranty period, the product should only be opened by Kontron. Removing the protection label and opening the product within the warranty period exempts the product from the statutory warranty obligation.

Due to their limited service life, parts which by their nature are subject to a particularly high degree of wear (wearing parts) are excluded from the warranty beyond that provided by law.

17/ Disposal

Final disposal of this product after the product's service life must be accomplished in accordance with the applicable country, state, or local laws or regulations.



Kontron manufactures products to satisfy environmental protection requirements where possible. Many of the components used are capable of being recycled.

Kontron follows the Waste Electrical and Electronic Equipment (WEEE) Directive that aims to reduce waste arising from Electrical and Electronic waste and encourages customers to return Kontron products for proper disposal. For more information regarding WEEE compliance, see the Disposal and Recycling section at the start of this user guide.

Appendix A: List of Acronyms

Table 19: List of Acronyms (Example)

AC	Alternating Current
ACPI	Advanced Configuration Control Interface
CPU	Central Processing Unit
DC	Direct Current
DIO	Digital Input/Output
DP	Display Port
ECC	Error Checking and Correction
EHCI	Enhanced Host Controller Interface
ESD	Electrostatic Discharge
GbE	Gigi bit Ethernet
GPU	Graphics Processing Unit
HD/HDD	Hard Disk /Drive
HDMI	High Definition Multimedia Interface
НРМ	PICMG Hardware Platform Management specification family
H/W	Hardware
IOL	IPMI-Over-LAN
IOT	Internet of Things
KVM	Keyboard Video Mouse
LAN	Local Area Network
LVD	Low Voltage Device
M.2	Next smaller generation of mSATA
MEI	Management Engine Interface
mPCle	Mini PCI-Express

mSATA	Mini SATA
OS	Operating System
PCle	PCI-Express
RAM	Read Access Memory
RoHS	Restriction of the use of certain hazardous substances
RTC	Real Time Clock
SATA	Serial-ATA
SEL	System Event Log
SELV	Safety Extra Low Voltage
SIO	Super Input/output
SMBus	System Management Bus
SMWI	System Monitor Web Interface
SOL	Serial Over LAN
SSD	Solid State Drive
TPM	Trusted Platform Module
UEFI	Unified Extensible Firmware Interface
USB	Universal Serial Bus
VGA	Video Graphics Array
VLP	Very Low Profile
WEEE	Waste Electrical and Electronic Equipment
WLAN	Wireless LAN
XHCI	eXtensible Host Controller Interface



About Kontron

Kontron is a global leader in embedded computing technology (ECT). As a part of technology group S&T, Kontron offers a combined portfolio of secure hardware, middleware and services for Internet of Things (IoT) and Industry 4.0 applications. With its standard products and tailor-made solutions based on highly reliable state-of-the-art embedded technologies, Kontron provides secure and innovative applications for a variety of industries. As a result, customers benefit from accelerated time-to-market, reduced total cost of ownership, product longevity and the best fully integrated applications overall. For more information, please visit: www.kontron.com



Global Headquarters

Kontron S&T AG

Lise-Meitner-Str. 3-5 86156 Augsburg Germany

Tel.: + 49 821 4086-0 Fax: + 49 821 4086-111 info@kontron.com