

CP6006-SA

User Guide, Rev. 0.5 Preliminary

Doc. ID: [To be Determined]

This page has been intentionally left blank

CP6006-SA - USER GUIDE

Disclaimer

Kontron would like to point out that the information contained in this user guide may be subject to alteration, particularly as a result of the constant upgrading of Kontron products. This document does not entail any guarantee on the part of Kontron with respect to technical processes described in the user guide or any product characteristics set out in the user guide. Kontron assumes no responsibility or liability for the use of the described product(s), conveys no license or title under any patent, copyright or mask work rights to these products and makes no representations or warranties that these products are free from patent, copyright or mask work right infringement unless otherwise specified. Applications that are described in this user guide are for illustration purposes only. Kontron makes no representation or warranty that such application will be suitable for the specified use without further testing or modification. Kontron expressly informs the user that this user guide only contains a general description of processes and instructions which may not be applicable in every individual case. In cases of doubt, please contact Kontron.

This user guide is protected by copyright. All rights are reserved by Kontron. No part of this document may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language or computer language, in any form or by any means (electronic, mechanical, photocopying, recording, or otherwise), without the express written permission of Kontron. Kontron points out that the information contained in this user guide is constantly being updated in line with the technical alterations and improvements made by Kontron to the products and thus this user guide only reflects the technical status of the products by Kontron at the time of publishing.

Brand and product names are trademarks or registered trademarks of their respective owners.

©2018 by Kontron S&T AG

Kontron S&T AG

Lise-Meitner-Str. 3-5 86156 Augsburg Germany www.kontron.com

High Risk Applications Hazard Notice

THIS DEVICE AND ASSOCIATED SOFTWARE ARE NOT DESIGNED, MANUFACTURED OR INTENDED FOR USE OR RESALE FOR THE OPERATION OF NUCLEAR FACILITIES, THE NAVIGATION, CONTROL OR COMMUNICATION SYSTEMS FOR AIRCRAFT OR OTHER TRANSPORTATION, AIR TRAFFIC CONTROL, LIFE SUPPORT OR LIFE SUSTAINING APPLICATIONS, WEAPONS SYSTEMS, OR ANY OTHER APPLICATION IN A HAZARDOUS ENVIRONMENT, OR REQUIRING FAIL-SAFE PERFORMANCE, OR IN WHICH THE FAILURE OF PRODUCTS COULD LEAD DIRECTLY TO DEATH, PERSONAL INJURY, OR SEVERE PHYSICAL OR ENVIRONMENTAL DAMAGE (COLLECTIVELY, "HIGH RISK APPLICATIONS").

You understand and agree that your use of Kontron devices as a component in High Risk Applications is entirely at your risk. To minimize the risks associated with your products and applications, you should provide adequate design and operating safeguards. You are solely responsible for compliance with all legal, regulatory, safety, and security related requirements concerning your products. You are responsible to ensure that your systems (and any Kontron hardware or software components incorporated in your systems) meet all applicable requirements. Unless otherwise stated in the product documentation, the Kontron device is not provided with error-tolerance capabilities and cannot therefore be deemed as being engineered, manufactured or setup to be compliant for implementation or for resale as device in High Risk Applications. All application and safety related information in this document (including application descriptions, suggested safety measures, suggested Kontron products, and other materials) is provided for reference only.

Revision History

Revision	Brief Description of Changes	Date of Issue
0.1	Initial Issue	2017-Apr-04
0.2	Preliminary Version, Chapter "Introduction"	2017-Apr-18
0.3	Preliminary Version	2017-May-11
0.4	Chapter 2.7 updated	2017-Nov-14
0.5	Chapter 2.1 - 2.6 updated; chapters 3 -6 updated	2018-Mar-05

Terms and Conditions

Kontron warrants products in accordance with defined regional warranty periods. For more information about warranty compliance and conformity, and the warranty period in your region, visit http://www.kontron.com/terms-and-conditions.

Kontron sells products worldwide and declares regional General Terms & Conditions of Sale, and Purchase Order Terms & Conditions. Visit http://www.kontron.com/terms-and-conditions.

For contact information, refer to the corporate offices contact information on the last page of this user guide or visit our website <u>CONTACT US</u>.

Customer Support

Find Kontron contacts by visiting: http://www.kontron.com/support.

Customer Service

As a trusted technology innovator and global solutions provider, Kontron extends its embedded market strengths into a services portfolio allowing companies to break the barriers of traditional product lifecycles. Proven product expertise coupled with collaborative and highly-experienced support enables Kontron to provide exceptional peace of mind to build and maintain successful products.

For more details on Kontron's service offerings such as: enhanced repair services, extended warranty, Kontron training academy, and more visit http://www.kontron.com/support-and-services/services.

Customer Comments

If you have any difficulties using this user guide, discover an error, or just want to provide some feedback, contact Kontron support. Detail any errors you find. We will correct the errors or problems as soon as possible and post the revised user guide on our website.

Symbols

The following symbols may be used in this user guide

ADANGER

DANGER indicates a hazardous situation which, if not avoided, will result in death or serious injury.

▲WARNING

WARNING indicates a hazardous situation which, if not avoided, could result in death or serious injury.

NOTICE

NOTICE indicates a property damage message.

ACAUTION

CAUTION indicates a hazardous situation which, if not avoided, may result in minor or moderate injury.



Electric Shock!

This symbol and title warn of hazards due to electrical shocks (> 60 V) when touching products or parts of products. Failure to observe the precautions indicated and/or prescribed by the law may endanger your life/health and/or result in damage to your material.



ESD Sensitive Device!

This symbol and title inform that the electronic boards and their components are sensitive to static electricity. Care must therefore be taken during all handling operations and inspections of this product in order to ensure product integrity at all times.



HOT Surface!

Do NOT touch! Allow to cool before servicing.



Laser!

This symbol inform of the risk of exposure to laser beam and light emitting devices (LEDs) from an electrical device. Eye protection per manufacturer notice shall review before servicing.



This symbol indicates general information about the product and the user guide.

 $This \ symbol \ also \ indicates \ detail \ information \ about \ the \ specific \ product \ configuration.$



This symbol precedes helpful hints and tips for daily use.

For Your Safety

Your new Kontron product was developed and tested carefully to provide all features necessary to ensure its compliance with electrical safety requirements. It was also designed for a long fault-free life. However, the life expectancy of your product can be drastically reduced by improper treatment during unpacking and installation. Therefore, in the interest of your own safety and of the correct operation of your new Kontron product, you are requested to conform with the following guidelines.

High Voltage Safety Instructions

As a precaution and in case of danger, the power connector must be easily accessible. The power connector is the product's main disconnect device.

ACAUTION

Warning

All operations on this product must be carried out by sufficiently skilled personnel only.

ACAUTION

Electric Shock!



Before installing a non hot-swappable Kontron product into a system always ensure that your mains power is switched off. This also applies to the installation of piggybacks. Serious electrical shock hazards can exist during all installation, repair, and maintenance operations on this product. Therefore, always unplug the power cable and any other cables which provide external voltages before performing any work on this product.

Earth ground connection to vehicle's chassis or a central grounding point shall remain connected. The earth ground cable shall be the last cable to be disconnected or the first cable to be connected when performing installation or removal procedures on this product.

Special Handling and Unpacking Instruction

NOTICE

ESD Sensitive Device!



Electronic boards and their components are sensitive to static electricity. Therefore, care must be taken during all handling operations and inspections of this product, in order to ensure product integrity at all times.

Do not handle this product out of its protective enclosure while it is not used for operational purposes unless it is otherwise protected.

Whenever possible, unpack or pack this product only at EOS/ESD safe work stations. Where a safe work station is not guaranteed, it is important for the user to be electrically discharged before touching the product with his/her hands or tools. This is most easily done by touching a metal part of your system housing.

It is particularly important to observe standard anti-static precautions when changing piggybacks, ROM devices, jumper settings etc. If the product contains batteries for RTC or memory backup, ensure that the product is not placed on conductive surfaces, including anti-static plastics or sponges. They can cause short circuits and damage the batteries or conductive circuits on the product.

Lithium Battery Precautions

If your product is equipped with a lithium battery, take the following precautions when replacing the battery.

ACAUTION

Danger of explosion if the battery is replaced incorrectly.

- Replace only with same or equivalent battery type recommended by the manufacturer.
- Dispose of used batteries according to the manufacturer's instructions.

General Instructions on Usage

In order to maintain Kontron's product warranty, this product must not be altered or modified in any way. Changes or modifications to the product, that are not explicitly approved by Kontron and described in this user guide or received from Kontron Support as a special handling instruction, will void your warranty.

This product should only be installed in or connected to systems that fulfill all necessary technical and specific environmental requirements. This also applies to the operational temperature range of the specific board version that must not be exceeded. If batteries are present, their temperature restrictions must be taken into account.

In performing all necessary installation and application operations, only follow the instructions supplied by the present user guide.

Keep all the original packaging material for future storage or warranty shipments. If it is necessary to store or ship the product then re-pack it in the same manner as it was delivered.

Special care is necessary when handling or unpacking the product. See Special Handling and Unpacking Instruction.

Quality and Environmental Management

Kontron aims to deliver reliable high-end products designed and built for quality, and aims to complying with environmental laws, regulations, and other environmentally oriented requirements. For more information regarding Kontron's quality and environmental responsibilities, visit http://www.kontron.com/about-kontron/corporate-responsibility/quality-management.

Disposal and Recycling

Kontron's products are manufactured to satisfy environmental protection requirements where possible. Many of the components used are capable of being recycled. Final disposal of this product after its service life must be accomplished in accordance with applicable country, state, or local laws or regulations.

WEEE Compliance

The Waste Electrical and Electronic Equipment (WEEE) Directive aims to:

- Reduce waste arising from electrical and electronic equipment (EEE)
- Make producers of EEE responsible for the environmental impact of their products, especially when the product become waste
- Encourage separate collection and subsequent treatment, reuse, recovery, recycling and sound environmental disposal of EEE
- Improve the environmental performance of all those involved during the lifecycle of EEE



Environmental protection is a high priority with Kontron.

Kontron follows the WEEE directive

You are encouraged to return our products for proper disposal.

Table of Contents

Symbols	6
For Your Safety	
High Voltage Safety Instructions	7
Special Handling and Unpacking Instruction	7
Lithium Battery Precautions	
General Instructions on Usage	8
Quality and Environmental Management	8
Disposal and Recycling	8
WEEE Compliance	8
Table of Contents	9
List of Tables	12
List of Figures	13
1/ Introduction	14
1.1. Board Overview	
1.2. System Expansion Capabilities	15
1.2.1. PMC Module	15
1.2.2. XMC Module	15
1.2.3. Rear I/O Module	15
1.3. Board Diagrams	
1.3.1. Functional Block Diagram	
1.3.2. Front Panel	17
1.3.3. Board Layout	
1.4. Technical Specification	21
1.5. Standards (preliminary; to be verified)	26
1.6. Related Publications	27
2/ Functional Description	28
2.1. Processor	
2.1.1. Graphics Controller	
2.2. Memory	29
2.3. Watchdog Timer	29
2.4. Battery	29
2.5. Flash Memory	
2.5.1. SPI Boot Flash for uEFI BIOS	30
2.6. Security Options	
2.6.1. Trusted Platform Module 2.0	30
2.7. Board Interfaces	31
2.7.1. Front Panel LEDs	31
2.7.2. USB Interfaces	34
2.7.3. VGA Interface	34
2.7.4. Serial Ports	35
2.7.5. Gigabit Ethernet	
2.7.6. SATA Interfaces	
2.7.7. PMC Interface	36
2.7.8. XMC Interface	37
2.7.9. CompactPCI Interface	
2.7.10. CompactPCI Connectors	39

2.7	49
3/ Configuration	50
3.1. DIP Switch Configuration	50
3.1.1. DIP Switch SW1	50
3.1.2. DIP Switch SW2	50
3.2. System Write Protection	51
3.3. CP6006(X)-SA-Specific Registers	51
3.3.1. Write Protection Register (WPROT)	52
3.3.2. Reset Status Register (RSTAT)	53
3.3.3. Board ID High Byte Register (BIDH)	54
3.3.4. Geographic Addressing Register (GEOAD)	54
3.3.5. Watchdog Timer Control Register (WTIM)	55
3.3.6. Board ID Low Byte Register (BIDL)	56
3.3.7. LED Configuration Register (LCFG)	56
3.3.8. LED Control Register (LCTRL)	57
3.3.9. General Purpose Output Register (GPOUT)	57
3.3.10. General Purpose Input Register (GPIN)	58
4/ Power Considerations	59
4.1. CP6006(X)-SA Voltage Ranges	59
4.1.1. Start-Up Requirement	59
4.1.2. Power-Up Sequence	59
4.1.3. Regulation	60
4.2. Power Consumption	60
4.2.1. Power Consumption of the CP6006(X)-SA Accessories	62
4.2.2. Power Consumption per Gigabit Ethernet Port	62
4.2.3. Power Consumption per 10 Gigabit Ethernet Port (CP6006X-SA)	
4.2.4. Power Consumption of PMC Modules	
4.2.5. Power Consumption of XMC Modules	63
5/ Thermal Considerations	
5.1. Operational Limits for the CP6006(X)-SA	
5.1.1. Peripherals	66
6/ Installation	67
6.1. Safety	67
6.2. General Instructions on Usage	67
6.2. General Instructions on Usage	67
6.2. General Instructions on Usage	67 67
6.2. General Instructions on Usage	67 67 67
6.2. General Instructions on Usage 6.3. Board Installation 6.3.1. Hot Swap Insertion 6.3.2. Hot Swap Removal 6.4. Installation of Peripheral Devices	67 67 67 68
6.2. General Instructions on Usage	67 67 68 69
6.2. General Instructions on Usage	6767686970
6.2. General Instructions on Usage	6767686970
6.2. General Instructions on Usage	
6.2. General Instructions on Usage 6.3. Board Installation 6.3.1. Hot Swap Insertion 6.3.2. Hot Swap Removal 6.4. Installation of Peripheral Devices 6.4.1. SATA M.2 Module Installation 6.4.2. Installation of External SATA Devices 6.4.3. PMC Module Installation 6.4.4. XMC Module Installation 6.4.5. Rear Transition Module Installation 6.5. Battery Replacement 6.5.1. Updating the IPMI Firmware 7/ uEFI BIOS (t.b.d.) 8/ IPMI Firmware	
6.2. General Instructions on Usage	

CP6006-SA – <mark>User Guide, Rev. 0.5 Preliminary</mark>

8.3. Supported IPMI and ATCA Commands	73
8.3.1. Standard IPMI Commands	74
8.3.2. AdvancedTCA and AMC Commands	77
8.4. Firmware Identification	78
8.4.1. Get Device ID Command	78
8.4.2. Device Locator Record	79
8.5. Board Control Extensions	79
8.5.1. SPI Boot Flash Selection—uEFI BIOS Failover Control	
8.5.2. uEFI BIOS Boot Order Selection	79
8.5.3. Set Control State (SPI Boot Flash Selection, Boot Order Selection)	80
8.5.4. Get Control State (SPI Boot Flash Selection, Boot Order Selection)	
8.6. Sensors Implemented on the Board	81
8.6.1. Sensor List	82
8.7. Sensor Thresholds	
8.8. OEM Event/Reading Types	86
8.9. IPMI Firmware Code	
8.9.1. Firmware Upgrade	87
8.9.2. IPMI Firmware and FRU Data Write Protection	
8.10. LAN Functions	87
Appendix A: List of Acronyms	88
About Kontron	90

List of Tables

Table 1: CP 6006(X)-SA Main Specifications	21
Table 2: Standards	26
Table 3: Additional Standards	26
Table 4: Related Publications	27
Table 5: Features of the Processors Supported on the CP6006(X)-SA	28
Table 6: Watchdog and Temperature Status LEDs' Functions	31
Table 7: IPMI and HS LEDs' Functions	32
Table 8: General Purpose LEDs' Functions on the CP6006-SA	33
Table 9: General Purpose LEDs' Functions on the CP6006X-SA	33
Table 10: POST Code Sequence	34
Table 11: POST Code Example	34
Table 12: Serial Port Port Connect or J8 Pinout	35
Table 13: Gigabit Ethernet Controller Port Mapping	35
Table 14: 10 Gigabit Ethernet Controller Port Mapping	36
Table 15: PMC PCI Frequency Configuration	36
Table 16: CompactPCI PCI / PCI-X Configuration	
Table 17: CompactPCI Bus Connector J1 System Slot Pinout	40
Table 18: CompactPCI Bus Connector J1 Peripheral Slot Pinout	41
Table 19: 64-bit CompactPCI Bus Connector J2 System Slot Pinout	42
Table 20: 64-bit CompactPCI Bus Connector J2 Peripheral Slot Pinout	43
Table 21: 64-bit CompactPCI Rear I/O Connector J3 Pinout	44
Table 22: CompactPCI Rear I/O Connector J3 Signals	45
Table 23: CompactPCI Rear I/O Connector J5 Pinout	46
Table 24: CompactPCI Rear I/O Connector J5 Signals	46
Table 25: High-Speed Serial Rear I/O Connector J41 Pinout	
Table 26: High-Speed Serial Rear I/O Connector J4 Pinout	48
Table 27: High-Speed Serial Rear I/O Connectors J41 and J4 Signal Description	
Table 28: High-Speed Serial Rear I/O Interconnection Port Mapping	49
Table 29: DIP Switch SW1 Functionality	50
Table 30: DIP Switch SW2 Functionality	
Table 31: CP6006(X)-SA-Specific Registers	51
Table 32: Write Protection Register (WPROT)	
Table 33: Reset Status Register (RSTAT)	
Table 34: Board ID High Byte Register (BIDH)	54
Table 35: Geographic Addressing Register (GEOAD)	
Table 36: Watchdog Timer Control Register (WTIM)	
Table 37: Board ID Low Byte Register (BIDL)	
Table 38: LED Configuration Register (LCFG)	
Table 39: LED Control Register (LCTRL)	
Table 40: General Purpose Output Register (GPOUT)	
Table 41: General Purpose Input Register (GPIN)	
Table 42: Operational Input Voltage Range	59
Table 43: Workload: uEFI Shell	
Table 44: Workload: Idle	
Table 45: Workload: Typical	
Table 46: Workload: Maximum	
Table 47: Power Consumption of CP6006(X)-SA Accessories	
Table 48: Power Consumption per Gigabit Ethernet Port	
Table 49: Power Consumption per 10 Gigabit Ethernet Port	
Table 50: PMC Module Current	
Table 51: XMC Module Current	
Table 52: Standard IPMI Commands	
Table 53: Standard IPMI Commands	
Table 54: Get Device ID Command	78

Table 55: Set Control State	80
Table 55: Set Control State	81
Table 57: Sensor List	82
Table 58: Thresholds - Standard and Extended Temperature Range	85
Table 59: Voltage Sensor Thresholds	85
Table 60: OEM Event/Reading Types	86
Table 61: List of Acronyms	88
List of Figures	
Figure 1: CP6006(X)_SA Functional Block Diagram	16
TISULE 1. CL 0000(V)-7V LULICUOLIULUUCK DIUSLULIMSI ULII	
Figure 2: 4 HP CP6006(X)-SA Front Panel	17
Figure 1: CP6006(X)-SA Functional Block Diagram	17
Figure 3: 4 HP CP6006-SA Front Panel (Top View)	18 19
Figure 3: 4 HP CP6006-SA Front Panel (Top View)	18 19 20
Figure 3: 4 HP CP6006-SA Front Panel (Top View)	18 19 20
Figure 3: 4 HP CP6006-SA Front Panel (Top View)	
Figure 3: 4 HP CP6006-SA Front Panel (Top View)	
Figure 3: 4 HP CP6006-SA Front Panel (Top View)	

1/ Introduction

1.1. Board Overview

CP6006-SA is a 6U server class CPU platform, based on the 14 nm Intel® Xeon® D-1500 processor with 2–16 cores options, with excellent performance-per-watt values.

Its scalable power budget allows users to tailor the power dissipation to their requirements. CP6006-SA provides cooling mechanics for standard air cooled systems.

CP6006 is well suited for advanced Multi-CPU server applications, built as virtual machines. By using virtualization, any CP6006 based platform becomes a future proof investment. The well-established CompactPCI eco system, combined with a long availability of the XEON D-1500 processor family and 10 years Intel reliability, make it a safe choice.

The outstanding Xeon® server capabilities can be combined with a high storage capacity of 32 GB DDR4 with ECC or on request even 64 GB, to allow for excellent virtualization support. This makes CP6006-SA and CP6006X-SA the ideal choice for servers and computing nodes, when ordinary 19" Rackmount systems do not meet the required robustness and longevity.

The Xeon D system on a chip (SoC) has an integrated platform controller hub (PCH), two integrated 10 Gigabit Ethernet ports, and integrated I/O such as USB and Serial ATA channels. Different Serial ATA storage devices can be used with CP6006: an onboard M.2 flash device, or others such as a 2.5" HDD/SSD by using the additional onboard cable connection or one of the rear transition modules. The highly integrated CP6006-SA also features an XMC site supporting x8 PCI Express® and alternatively a PMC site for various market available extensions. Based on the Kontron rear I/O concept, existing rear I/O transition modules are fully functional on the CP6006-SA, where the CP6006X-SA provides additional 10GbE and PCI-Express on the backplane for communication between CompactPCI® slots

CP6006-SA is ready to be used with Kontron APPROTECT. Kontron APPROTECT is a complementary product and may be purchased separately as option. The related security chip is soldered onto the PCB which is important for many field deployments. It provides copy protection, IP protection, license model enforcement, license handling, implementation of license models, assignment of privileges respectively access levels. In addition, CP6006-SA is equipped with a Trusted Platform Module (TPM 2.0) for enhanced hardware and software based data and system security, such as secure boot and trusted boot. TPM access is disabled by default.

PCI Express® and 10 Gigabit Ethernet is enabled via a high speed backplane connector at J4 position and the signalling according to PICMG2.20. The function is provided as additional option beyond PICMG2.16 by the product variant CP6006X-SA. The PICMG2.20 based products are the right choice whenever highest data throughput and maximum bandwidth within the system is required. Further PICMG2.20 based boards are the PMC/XMC carrier CP6105X, the GPU carrier CP6108X, the GPU card CP6-GPU8860, backplanes, card cages, and a sample system CP-RAPID.

The board is offered with various board support packages including Windows, VxWorks and Linux operating systems. For further information concerning the operating systems available for the CP6006(X)-SA, please contact Kontron.

<u>www.kontron.com</u> //14

1.2. System Expansion Capabilities

1.2.1. PMC Module

The CP6006(X)-SA has a 3.3 V, PMC mezzanine interface configurable for 32-bit / 66 MHz PCI operation. This interface supports a wide range of PMC modules with PCI interface including all of Kontron's PMC modules and provides an easy and flexible way to configure the CP6006(X)-SA for various application requirements. For information on the PMC interface, refer to Chapter 2.7.7, "PMC Interface".

1.2.2. XMC Module

The CP6006(X)-SA has one XMC mezzanine interface for support of x1, x4 and x8 PCI Express 2.0 XMC modules providing an easy and flexible way to configure the CP6006(X)-SA for various application requirements. For information on the XMC interface, refer to Chapter 2.7.8, "XMC Interface".

1.2.3. Rear I/O Module


The CP6006(X)-SA provides support for one rear I/O module via the CompactPCI rear I/O connectors. For further information about the compatibility of rear I/O modules with the CP6006(X)-SA, refer to the CP6006(X)-SA datasheet.

1.3. Board Diagrams

The following diagrams provide additional information concerning board functionality and component layout.


1.3.1. Functional Block Diagram

Figure 1: CP6006(X)-SA Functional Block Diagram

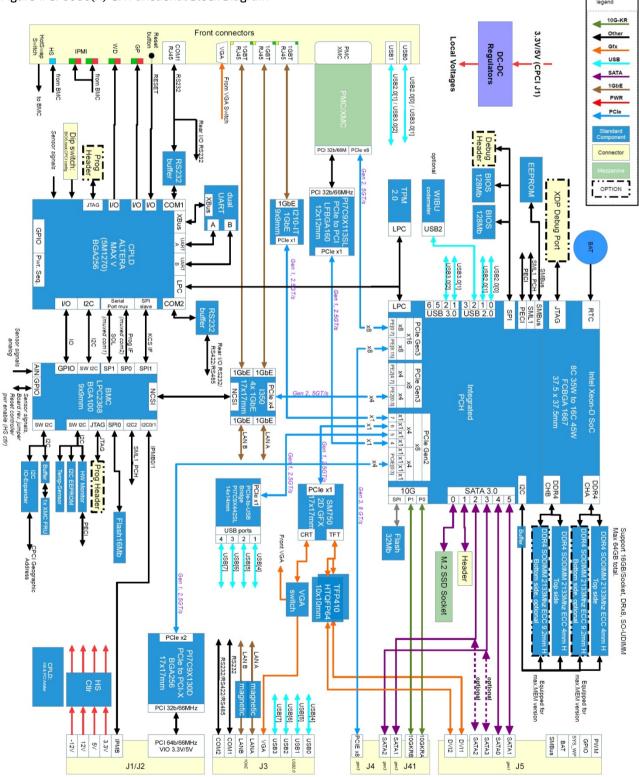

1.3.2. Front Panel

Figure 2: 4 HP CP6006(X)-SA Front Panel



IPMI LEDs

10/11 (red/green): Indicate the software status of the IPMI controller

System Status LEDs

HS (blue): Hot Swap Status
TH (red/green): Temperature Status
WD (green): Watchdog Status

General Purpose LEDs

LED3-0 (red/green/amber): General Purpose / POST Code

Note: If the General Purpose LEDs 3–0 are lit red during boot-up,


a failure is indicated before the uEFI BIOS has started.

Integral Ethernet LEDs

ACT (green): Ethernet Link/Activity
SPEED (orange): 1000BASE-T Ethernet Speed
SPEED (green): 100BASE-TX Ethernet Speed
SPEED (off) + ACT (on): 10BASE-T Ethernet Speed

1.3.3. Board Layout

Figure 3: 4 HP CP6006-SA Front Panel (Top View)

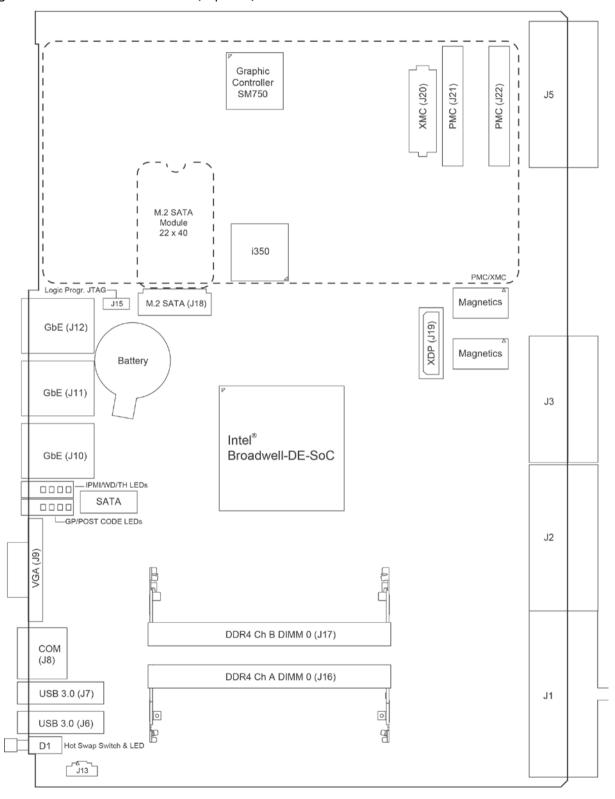


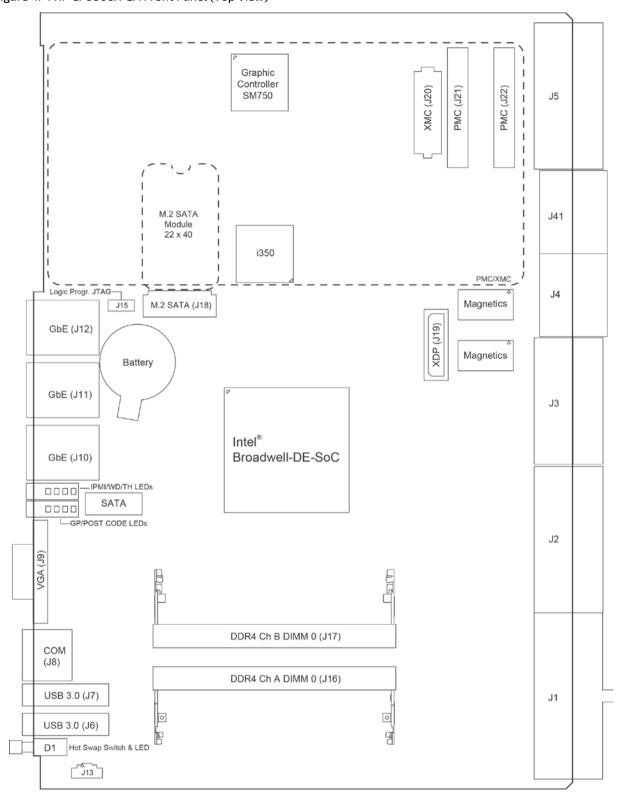


Figure 4: 4 HP CP6006X-SA Front Panel (Top View)

Figure 5: 4 HP CP6006(X)-SA Front Panel (Bottom View)

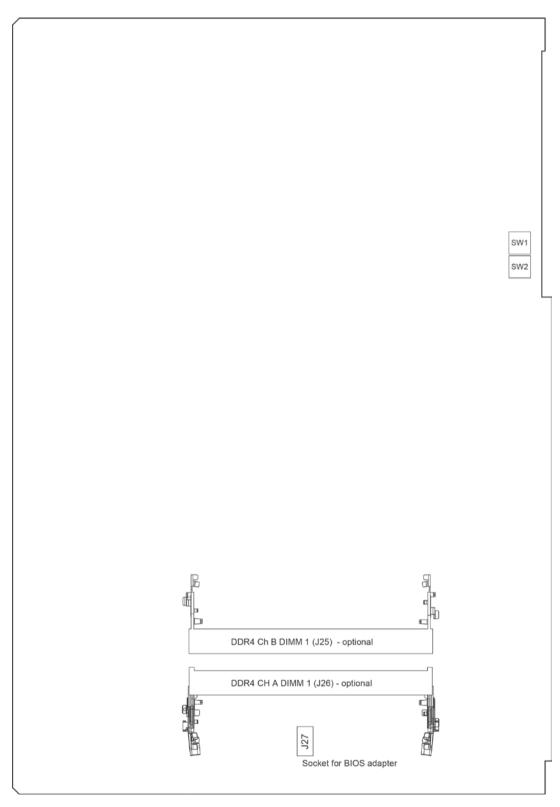

1.4. Technical Specification

Table 1: CP 6006(X)-SA Main Specifications

Processor & Chipset		
Processsor	The CP6006(X)-SA supports the following 4th generation processors: Intel® Xeon® Processor D-1500, integrating a PCH and a dual 10 GbE NIC. D-1539, 8 core, 12 MByte cache, 1.6GHz D-1548, 8 core, 12 MByte cache, 2.0 GHz D-1559, 12 core, 18 MByte cache, 1.5 GHz, on request	
Memory		
System Memory	 Up to 32 GByte SODIMM dual channel DDR4 memory with ECC and data speed of up to 2133 MHz per channel Socket for optional M.2 Solid State Drive Two redundant 16 MByte SPI Flashes 	
Flash Memory	Two 16 MB SPI boot flash chips for two separate uEFI BIOS imagesSocket for M.2 Solid State Drive (SSD)	
EEPROM	EEPROM with 64 kbit	
Interfaces		
CompactPCI	CompactPCI interface: Compliant with CompactPCI Specification PICMG 2.0 R 3.0: System controller operation 64-bit / 66 MHz PCI or PCI-X master interface with dedicated PCIe-to-PCI-X bridge 3.3V or 5V signaling levels (universal signaling support) Compliant with the Packet Switching Specification PICMG 2.16 The CP6006(X)-SA supports System Master hot swap functionality and application-dependent hot swap functionality when used in a peripheral slot. When used as a System Master, the CP6006(X)-SA supports individual clocks for early slot and the ENUM signal handling is in compliance with the PICMG 2.1 Hot Swap Specification. When installed in a peripheral slot, the CP6006(X)-SA is isolated from the CompactP bus. It receives power from the backplane and supports rear I/O and, if the system supports it, packet switching (in this case up to two channels of Gigabit Ethernet).	
Standard Rear I/O	The following interfaces are routed to the rear I/O connectors J3 and J5. COMA (RS-232 signaling) and COMB (RS-232 signaling); no buffer on the rear I/O module is necessary 4 x USB 2.0 1 x CRT VGA, 2 x HDMI/DVI 2 x Gigabit Ethernet (compliant with PICMG 2.16, R 1.0) 4 x SATA 3 Gb/s (up to) 4 x GPIs and 4 GPOs (LVTTL signaling) System write protection	

<u>www.kontron.com</u> // 21

Interfaces			
High-Speed Serial Rear I/O Interconnection	The following interfaces are provided on the rear I/O via two ZDplus high-speed connectors, J4 and J41 (PICMG 2.20):		
(CP6006X-SA)	Two 10GBASE-KR interfaces		
	One x8 PCI Express 3.0 operating at 8 GT/s as a root complex controller only		
	> 2xSATA gen 3 (6 Gb/s)		
	The port mapping of the high-speed serial rear I/O interconnection on the CP6006(X)-SA is capable of supporting two 10GBASE-KR/40GBASE-KR4 interfaces, one x8 PCI Express 3.0 operating at 8 GT/s, and two SATA 6 Gb/s ports.		
Gigabit Ethernet	Five 10 Base-T/100 Base-TX/1000 Base-T Gigabit Ethernet interfaces based on one Intel® I210-IT Gigabit Ethernet controller and one Intel® I350 quad-port Gigabit Ethernet controller:		
	Three RJ-45 connectors on the front panel		
	Two ports on the rear I/O (PICMG 2.16)		
USB	Six USB ports supporting UHCI (USB 1.1) and EHCI (USB 2.0):		
	Two type A USB 3.0 connectors on the front panel		
	Four USB 2.0 ports on the rear I/O interface		
Serial	Two 16C550-compatible UARTs:		
	One RS-232 port on the front panel and routed to rear I/O, COMA		
	▶ One RS-232 port on the rear I/O, COMB		
XMC	XMC interface:		
	One onboard XMC connector for connecting a standard XMC module		
	▶ Up to x8 PCI Express 2.0 ports operating at 5 GT/s		
SATA	Two SATA 6 Gb/s interfaces for:		
	Socket for M.2 Solid State Drive (SSD)		
	One standard SATA 6 Gb/s interface for the standard SATA connector		
	SATA 3Gb/s: four ports (CP6006-SA) respectively two ports (CP6006X-SA) accessible via rear I/O		
	► High-performance RAID 0/1/5/10 functionality on all SATA ports		

Sockets			
Front Panel Connectors	VGA: one 15-pin, D-Sub connector, J9		
	USB: two 4-pin, type A connectors, J6 and J7		
	Ethernet: three 8-pin, RJ-45 connectors, J10, J11 and J12		
	Serial port: one 8-pin, RJ-45 connector, J8 (COMA)		
	XMC front panel bezel cutout		
Onboard Connectors			
Official Confriectors	▶ One XMC connector, J20		
	Two SATA connectors		
	One 7-pin, standard SATA connector, J14		
	One M.2 socket (J18)		
	One JTAG connector, J15		
	One XDP-SFF (debug) connector, J19		
	Four CompactPCI connectors J1, J2, J3 and J5		
	Two ZDplus high-speed serial rear I/O connectors, J4 and J41 (PICMG 2.20) (CP6006X-SA)		
	Two 260-pin DDR4 SODIMM sockets, J16 and J17		
	(optional four sockets; two on the rear side of the board, J25 and J26)		
LEDs			
Front Panel LEDs	IPMI LEDs:		
	► IO/I1 (red/green): Software status of the IPMI controller		
	System Status LEDs:		
	▶ WD (green): Watchdog status		
	TH (red/green): Temperature status		
	► HS (blue): Hot swap status		
	General Purpose LEDs:		
	► LED3-0 (red/green/amber): General purpose / POST code		
	Ethernet LEDs:		
	ACT (green): Network link / activity		
	SPEED (green/orange): Network speed		
Switches			
DIP Switches	Two onboard DIP switches, SW1 and SW2 for board configuration on the rear side of the board		
Reset Switch	One hardware reset switch on the front panel		
Hot Swap Switch	One switch for hot swap purposes integrated in the front panel in accordance with PICMG 2.1 Rev. 2.0		
Timer			
Real-Time Clock	Real-time clock with 256 Byte CMOS RAM; battery-backup available		
Watchdog Timer	Software-configurable, two-stage Watchdog with programmable timeout ranging		
	from 125 ms to 4096 s in 16 steps		
	Serves for generating IRQ or hardware reset		
System Timer	The Intel® SoC contains three 8254-style counters with fixed uses.		
	In addition to the three 8254-style counters, the Intel® SoC includes eight individual high-precision event timers that may be used by the operating system. They are implemented as a single counter each with its own comparator and value register.		

IPMI		
IPMI Controller	NXP® ARM7 microcontroller with 512 kB firmware flash and automatic rollback strategy The IPMI controller carries out IPMI commands such as monitoring several onboard temperature conditions, board voltages and the power supply status, and managing hot swap operations. The IPMI controller is accessible via two IPMBs, one host Keyboard Controller Style (KCS) Interface and up to four Gigabit Ethernet Interfaces (IOL).	
Thermal		
Thermal Management	CPU and board overtemperature protection is provided by: Temperature sensors integrated in the Intel® SoC: One temperature sensor for monitoring each processor core One temperature sensor for monitoring the package die temperature One onboard temperature sensor for monitoring the board temperature Specially designed heat sink	
Security		
TPM	Trusted Platform Module (TPM) 2.0 for enhanced hardware- and software-based data and system security	
APPROTECT	▶ WiBu CodeMeter	
Software		
uEFI BIOS	 AMI Aptio V™ BIOS firmware based on the uEFI Specification and the Intel Platform Innovation Framework for EFI: LAN boot capability for diskless systems (standard PXE) Automatic fail-safe recovery in case of a damaged image Non-volatile storage of setup settings in the SPI boot flash (battery only required for the RTC) Compatibility Support Module (CSM) providing legacy BIOS compatibility based on AMI Aptio V 	
	 Command shell for diagnostics uEFI Shell commands executable from mass storage device in a pre-OS environment (open interface) 	

Software (continued)				
IPMI Firmware	IPMI firmware p	roviding the following feature	25:	
	► Keyboard Controller Style (KCS) interface			
	Dual-port IPMB interface for out-of-band management and sensor monitoring			
		AN (IOL) and Serial over LAN (
	Sensor Device functionality with configurable thresholds for monitoring board voltages, CPU state, board reset, etc.			
	FRU Invent	ory functionality		
	System Eve	ent Log (SEL), Event Receiver f	functionalities	
	Sensor Dat	a Record Repository (SDRR) fo	unctionality	
	► IPMI Watch	dog functionality (power-cyc	le, reset)	
	Board mon	itoring and control extensions	5:	
	▶ Gracefu	l shutdown support		
	uEFI BIOS fail-over control: selection of the SPI boot flash (standard/recovery)			
	Field-upgradeable IPMI firmware:			
	via the KCS, IPMB or IOL interfacesDownload of firmware does not break the currently running firmware or			
	payload activities			
	Two flash banks with rollback capability: manual rollback or automatic in case of upgrade failure			
Operating Systems		There are various operating systems available for the CP6006(X)-SA. For further information, please contact Kontron.		
General				
Power Consumption	See Chapter 4 fo	or details.		
Temperature Range	Operational:	-0°C to +60°C (TBD)	Standard	
	·	-40°C to +70°C (TBD)	Extended	
	Storage:	-40°C to +85°C (TBD)	Without hard disk and without battery	
Battery	3.0 V lithium bat	tery for RTC with battery soc	ket	
	Battery type: UL	-approved CR2025		
	Temperature ra	nges:		
	Operati	onal (load): -20°C to +70°C	typical	
			(refer to the battery manufacturer's specifications for exact range)	
	Storage	e (no load): -40°C to +70°C	typical	
Climatic Humidity	93% RH at 40 °C	93% RH at 40 °C, non-condensing (acc. to IEC 60068-2-78)		
Dimensions	233.35 mm x 160) mm		
	6U, 4 HP, CompactPCI Serial-compliant form factor (6U, 8HP with 4-DIMM option)			
Board Weight	CP6006-SA with	heat sink: 778 grams (TBD)		
	CP6006X-SA with heat sink: 796 grams (TBD)			
	The above-mentioned board weight refers to the CP6006(X)-SA without extension modules (XMC, PMC)			

1.5. Standards (preliminary; to be verified)

This product complies with the requirements of the following standards.

Table 2: Standards

Туре	Aspect	Standard
CE	Emission	EN55022, EN61000-6-3
	Immission	EN55024, EN61000-6-2
	Electrical Safety	EN60950-1
Mechanical	Mechanical Dimensions	IEEE 1101.10
Environmental	Climatic Humidity	IEC60068-2-78 (see note below)
	WEEE	Directive 2002/96/EC
		Waste electrical and electronic equipment
	RoHS 2	Directive 2011/65/EU
		Restriction of the use of certain
		hazardous substances in electrical and
		electronic equipment

Table 3: Additional Standards

Туре	Aspect	Standard	Remarks
Environmental	Vibration	IEC60068-2-6	Ruggedized version test parameters:
	(Sinusoidal)		10-300 (Hz) frequency range
			2 (g) acceleration
			1 (oct/min) sweep rate
			10 cycles/axis
			3 axes
	Single Shock	IEC60068-2-27	Ruggedized version test parameters:
			30 (g) acceleration
			9 (ms) shock duration half sine
			3 number of shocks per direction (total: 18)
			6 directions
			5 (s) recovery time
	Permanent Shock	IEC60068-2-29	Ruggedized version test parameters:
			15 (g) acceleration
			11 (ms) shock duration half sine
			500 number of shocks per direction
			6 directions
			5 (s) recovery time

NOTICE

Customers desiring to perform further environmental testing of the CP6006(X)-SA must contact Kontron for assistance prior to performing any such testing.

Boards without conformal coating must not be exposed to a change of temperature which can lead to condensation. Condensation may cause irreversible damage, especially when the board is powered up again.

Kontron does not accept any responsibility for damage to products resulting from destructive environmental testing

1.6. Related Publications

The following publications contain information relating to this product.

Table 4: Related Publications

Product	Publication	
CompactPCI Systems	PICMG 2.0, Rev. 3.0 CompactPCI Specification	
	PICMG 2.16, Rev. 1.0 CompactPCI Packet Switching Backplane Specification	
	PICMG 2.20, Rev. 1.0 CompactPCI Packet Serial Mesh Backplane Specification	
	PICMG 2.9, Rev. 1.0 CompactPCI System Management Specification	
	PICMG 2.1, Rev. 2.0 CompactPCI Hot Swap Specification	
	IPMI - Intelligent Platform Management Interface Specification v2.0	
	Kontron CompactPCI Backplane Manual, ID 24229	
XMC Module	ANSI/VITA 42.0-200x XMC Switched Mezzanine Card Auxiliary Standard	
	ANSI/VITA 42.3-2006 XMC PCI Express Protocol Layer Standard	
	IEEE 1386-2001, IEEE Standard for a Common Mezzanine Card (CMC) Family	
Platform Firmware	Unified Extensible Firmware Interface (uEFI) Specification, Version 2.1	
All Kontron products	Product Safety and Implementation Guide, ID 1021-9142	

2/ Functional Description

2.1. Processor

The CP6006(X)-SA supports the Intel® XEON® D-1539 and the Intel® XEON® D-1548 processors.

Table 5: Features of the Processors Supported on the CP6006(X)-SA

FEATURE	Intel® XEON® D-1539, 1.64 GHz	Intel® XEON® D-1548, 2.04 GHz
Processor Cores	eight	eight
Processor Base Frequency (HFM)	1.6 GHz	2.0 GHz
Maximum Turbo Frequency	2.2 GHz	2.6 GHz
Hyper-Threading	supported	supported
SpeedStep®	supported	supported
L1 cache per core	32 kB	32 kB
L2 cache per core	256 kB	256 kB
L3 cache	1.5 MB/core	1.5 MB/core
On-package cache	up to 128 MB	
DDR4 Memory	up to 128 GB / 2133 MHz	up to 128 GB / 2400 MHz
Configurable Thermal Design Power		
Power Limit Reduction		
Thermal Design Power	35 W	45 W

For further information about the processors used on the CP6006(X)-SA, please visit the Intel website. For further information concerning the suitability of other Intel processors for use with the CP6006(X)-SA, please contact Kontron.

2.1.1. Graphics Controller

CP6006-SA provides a low-power graphic controller, SM750 LynxExp with video and 2D capability. It supports two independent display interfaces with a maximum resolution of 1920x1440 pixels.

One of the graphic ports of the SM750 is for the DVI1/HDMI1 port at the rear IO, the other port is a combination of: VGA front or VGA rear or DVI2/HDMI2, which is user selectable via BIOS setting. The default setting is front VGA.

2.2. Memory

The CP6006(X)-SA supports a dual-channel (72-bit) DDR4 SDRAM memory with Error Checking and Correcting (ECC) running at 2133 MHz. It provides two (optional: 4) 260-pin sockets for two DDR4 (optional: 4) ECC SODIMM modules that support up to 32 GB (optional: 64GB) system memory. The maximum memory size per slot is 16 GB.

The available memory module configuration can be either 16 GB, 32 GB (optional: 64GB).



Only qualified DDR4 ECC SODIMM modules from Kontron are authorized for use with the CP6006(X)-SA. Replacement of the SODIMM modules by the customer without authorization from Kontron will void the warranty.

2.3. Watchdog Timer

The CP6006(X)-SA provides a Watchdog timer that is programmable for a timeout period ranging from 125 ms to 4096 s in 16 steps.

The Watchdog timer provides the following modes or operation:

- Timer-only mode
- Reset mode
- Interrupt mode
- Dual-stage mode

In dual-stage mode, a combination of both interrupt and reset is generated if the Watchdog is not serviced.

2.4. Battery

The CP6006(X)-SA is provided with an UL-approved CR2025, 3.0 V, "coin cell" lithium battery for the RTC. When a battery is installed, refer to the operational specifications of the battery as this determines the storage temperature of the CP6006(X)-SA.

2.5. Flash Memory

The CP6006(X)-SA provides flash interfaces for the uEFI BIOS.

2.5.1. SPI Boot Flash for uEFI BIOS

The CP6006(X)-SA provides two 16 MB SPI boot flashes for two separate uEFI BIOS images, a standard SPI boot flash and a recovery SPI boot flash. The fail-over mechanism for the uEFI BIOS recovery can be controlled via the DIP switch SW1, switch 2. The SPI boot flash includes a hardware write protection option, which can be configured via the uEFI BIOS. If write protection is enabled, the SPI boot flash cannot be written to.

NOTICE

The uEFI BIOS code and settings are stored in the SPI boot flashes. Changes made to the uEFI BIOS settings are available only in the currently selected SPI boot flash. Thus, switching over to the other SPI boot flash may result in operation with different uEFI BIOS code and settings.

2.6. Security Options

2.6.1. Trusted Platform Module 2.0

The CP6006(X)-SA supports the Trusted Platform Module (TPM) 2.0. TPM2.0 is a security chip specifically designed to provide enhanced hardware- and software-based data and system security. TPM2.0 is based on the Infineon SLB9665XT 2.0 security controller and stores sensitive data such as encryption and signature keys, certificates and passwords, and is able to withstand software attacks to protect the stored information.

2.7. Board Interfaces

2.7.1. Front Panel LEDs

The CP6006(X)-SA provides three system status LEDs, one Hot Swap Status LED (HS LED), one temperature status LED (TH LED) and one Watchdog status LED (WD LED), as well as two IPMI LEDs (I0 and I1) and four General Purpose/POST code LEDs (LED3-0). Their functionality is described in the following chapters and reflected in the registers mentioned in Chapter 3, Configuration.

2.7.1.1. Watchdog and Temperature Status LEDs

Table 6: Watchdog and Temperature Status LEDs' Functions

LED	COLOR	STATE	FUNCTION
TH LED	red / green	Off	Power failure
		Green	Board in normal operation
		Red	CPU has reached maximum allowable operating temperature and the performance has been reduced
		Red blinks	CPU temperature above 125°C (CPU has been shut off)
			In this event, all General Purpose LEDs (LED3–0) are blinking red as well.
WD LED	red / green	OFF	Watchdog inactive
		Green	Watchdog active, waiting to be triggered
		Red	Watchdog expired

NOTICE

If the TH LED flashes red at regular intervals, it indicates that the processor junction temperature has reached a level beyond which permanent silicon damage may occur and the processor has been shut off. To turn to normal operation, the power must be switched off and then on again.

2.7.1.2. IPMI LEDs and HS LED

The IPMI LEDs IO and I1 show the software status of the IPMI controller. The Hot Swap LED (HS LED) indicates when the board may be extracted. It can be switched on or off by software and may be used, for example, to indicate that the shutdown process is finished and the board is ready for extraction.

Table 7: IPMI and HS LEDs' Functions

LED	COLOR	STATE	FUNCTION
I0 (right)	red	Off	IPMI controller running
		On	IPMI controller out of service or in reset state
		Blinking	IPMI controller firmware upgrade
	green	Pulsing	Traffic on the IPMB bus
I1 (left)	red	On	Health error detected
	red/amber	Blinking	Health error detected, IPMI controller running showing its heart beat
		Pulsing	Health error detected, KCS interface active
	green	Off	No health error detected
		Pulsing	KCS interface active
		Blinking	IPMI controller running showing its heart beat
HS LED	blue	Off	Board in normal operation
			Do not extract the board.
		Blinking	Board hot swap in progress Board is not ready for extraction. Do not actuate the hot swap handle. Blinking pattern:
			a) Long on, short off: the IPMI controller starts the payload
		b) Long off, short on: the IPMI controller shuts down the payload Wait until the HS LED stops blinking and remains on to extract the	
		On	a) Board ready for hot swap extraction, or
			b) Board has just been inserted in a powered system



The status of the IPMI-controlled LEDs (I0, I1, and HS LED) may be temporarily overwritten by the PICMG-defined "Set FRU LED State" command to implement, for example, a lamp test.

2.7.1.3. General Purpose LEDs

The General Purpose LEDs (LED3–0) are designed to indicate the boot-up POST code after which they are available to the application. If the LED3–0 are lit red during boot-up, a failure is indicated. In this event, please contact Kontron for further assistance.

Table 8: General Purpose LEDs' Functions on the CP6006-SA

LED	COLOR	FUNCTION DURING BOOT-UP	FUNCTION DURING uEFI BIOS POST (if POST code config. is enabled)	FUNCTION AFTER BOOT-UP
LED3	red	Power failure		
	green		uEFI BIOS POST bit 3 and bit 7	
	amber			
LED2	red	CPU catastrophic error	CPU catastrophic error	
	green		uEFI BIOS POST bit 2 and bit 6	SATA channels active
	amber			
LED1	red	Hardware reset		
	green		uEFI BIOS POST bit 1 and bit 5	
	amber			
LED0	red	uEFI BIOS boot failure		
	green		uEFI BIOS POST bit 0 and bit 4	
	amber			

Table 9: General Purpose LEDs' Functions on the CP6006X-SA

LED	COLOR	FUNCTION	FUNCTION DURING uEFI BIOS POST	FUNCTION ASTER POOT LIP
		DURING BOOT-UP	(if POST code config. is enabled)	AFTER BOOT-UP
LED3	red	Power failure		
	green		uEFI BIOS POST bit 3 and bit 7	
	amber			
LED2	red	CPU catastrophic error	CPU catastrophic error	
	green		uEFI BIOS POST bit 2 and bit 6	SATA channels active
	amber			
LED1	red	Hardware reset		
	green		uEFI BIOS POST bit 1 and bit 5	10 Gigabit Ethernet link signal status of the high- speed serial rear I/O port 2 (10GKR Intel® SoC port 0)
	amber			
LED0	red	uEFI BIOS boot failure		
	green		uEFI BIOS POST bit 0 and bit 4	10 Gigabit Ethernet link signal status of the high- speed serial rear I/O port 1 (10GKR Intel® SoC port 1)
	amber			

For further information regarding the configuration of the General Purpose LEDs, refer to Chapter 3.3.7, LED Configuration Register, and Chapter 3.3.8, LED Control Register.

NOTICE

The bit allocation for Port 80 is the same as for the POST code.

How to Read the 8-Bit POST Code

Due to the fact that only 4 LEDs are available and 8 bits must be displayed, the POST code output is multiplexed on the General Purpose LEDs.

Table 10: POST Code Sequence

STATE	GENERAL PURPOSE LEDs
0	All LEDs are OFF; start of POST sequence
1	High nibble
2	Low nibble; state 2 is followed by state 0

The following is an example of the General Purpose LEDs' operation if the POST configuration is enabled (see also Tables 8 and 9).

Table 11: POST Code Example

	LED3	LED2	LED1	LED0	RESULT
HIGH NIBBLE	off (0)	on (1)	off (0)	off(0)	0x4
LOW NIBBLE	off (0)	off (0)	off (0)	on (1)	0x1
POST CODE	0x41				

NOTICE

Under normal operating conditions, the General Purpose LEDs should not remain lit during boot-up. They are intended to be used only for debugging purposes. In the event that a General Purpose LED lights up during boot-up and the CP6006(X)-SA does not boot, please contact Kontron for further assistance.

2.7.2. USB Interfaces

The CP6006(X)-SA provides six USB ports:

- Two on front I/O (USB 3.0/2.0)
- Four on the CompactPCI rear I/O interface (USB 2.0)

On the front panel, the CP6006(X)-SA has two standard, type A, USB 3.0 connectors, J6 and J7.

2.7.3. VGA Interface

The CP6006(X)-SA provides one standard VGA interface for connection to a monitor. The VGA interface is implemented as a standard VGA connector, J9, on the front panel.

2.7.4. Serial Ports

The CP6006(X)-SA provides two serial ports:

- COMA (RS-232) available either on the front panel or on the CompactPCI rear I/O interface
- COMB (RS-232) on the CompactPCI rear I/O interface

COMA and COMB are fully compatible with the 16550 controller. The rear I/O COMA port includes a complete set of handshaking and modem control signals. The COMB port includes RXD, TXD, CTS, and RTS signals.

The COMA and COMB ports provide maskable interrupt generation. The data transfer on the COM ports is up to 115.2 kbit/s. If RS-422 is required on the COMB port, please contact Kontron for further assistance.

The serial port COMA is implemented as an 8-pin RJ-45 connector, J8. The following figure and table provide pinout information for the serial connector J8 (COMA).

Figure 6: Serial Port Connect or J8




Table 12: Serial Port Port Connect or J8 Pinout

PIN	SIGNAL	DESCRIPTION	1/0
1	RTS	Request To Send	0
2	DTR	Data Terminal Ready	0
3	TXD	Transmit Data	0
4	GND	Signal Ground	
5	GND	Signal Ground	
6	RXD	Receive Data	I
7	DSR	Data Send Request	I
8	CTS	Clear To Send	I

2.7.5. Gigabit Ethernet

The CP6006(X)-SA board provides five 10Base-T/100Base-TX/1000Base-T Ethernet interfaces. They are based on one Intel® I350 quad-port Gigabit Ethernet controller and one Intel® I210-IT Gigabit Ethernet controller.

The Intel® I350 quad-port Gigabit Ethernet controller provides four Gigabit Ethernet interfaces, two on the front panel, GbE A and GbE B, and two on the rear I/O, PICMG 2.16 LPa and PICMG 2.16 LPb. All four Ethernet channels support IPMI over LAN (IOL) and Serial over LAN (SOL).

Table 13: Gigabit Ethernet Controller Port Mapping

ETHERNET CONTROLLER	PORT MAPPING	IOL/SOL Channel (IPMI)
Intel® I350, port 0	Rear I/O port PICMG 2.16 LPb	2
Intel® I350, port 1	Rear I/O port PICMG 2.16 LPa	3
Intel® I350, port 2	Front I/O connector J11 (GbE B)	4
Intel® I350, port 3	Front I/O connector J10 (GbE A)	5
Intel® Intel® I210-IT	Front I/O connector J12 (GbE E)	

The Intel® Intel® I210-IT Gigabit Ethernet controller provides one Gigabit Ethernet interface on the front panel, GbE E.

The Gigabit Ethernet interfaces are implemented as three standard RJ-45 Ethernet connectors, J10, J11 and J12 on the front panel.

2.7.5.1. 10 Gigabit Ethernet Interfaces (CP6006X-SA)

The CP6006X-SA supports two 10GBASE-KR Ethernet interfaces on the rear I/O using the Intel® SoC dual-port 10 Gigabit Ethernet controller.

The following table indicates the 10 Gigabit Ethernet port mapping of the CP6006X-SA.

Table 14: 10 Gigabit Ethernet Controller Port Mapping

ETHERNET CONTROLLER	PORT MAPPING
Intel® SoC, port 0	High-speed serial rear I/O interconnection port 1 (10GBE1)
Intel® SoC, port 1	High-speed serial rear I/O interconnection port 2 (10GBE2)

2.7.6. SATA Interfaces

The CP6006(X)-SA provides six SATA ports:

- One SATA 6 Gb/s port on the J18 M.2 socket for mounting a SATA SSD M.2 module
- One SATA 6 Gb/s port on the standard SATA connector, J14, for connection to SATA devices via cable
- Four SATA 3 Gb/s ports on the CompactPCI rear I/O interface
- Optional: Two of the four rear I/O SATA 3 Gb/s ports are available as SATA 6 Gb/s ports on the high-speed serial rear I/O interconnection (CP6006X-SA)



In case a RTM Module is present, by default uEFI Bios will limit SATA Speed from 6.0 Gb/s to 1.5Gb/s for all SATA ports, including on board SATA ports.

This behavior can be modified inside Bios Setup (IntelRCSetup -> PCH SATA Configuration -> SATA controller Speed).

Please note that data path via CompactPCI Rear I/O interface is suitable for 3.0Gb/s or slower connections.

All six SATA interfaces provide high-performance RAID 0/1/5/10 functionality.

2.7.7. PMC Interface

The CP6006(X)-SA provides one 3.3 V standard PMC interface with a dedicated 32-bit / 66 MHz PCI Express-to-PCI bridge. The PMC interface is compliant with the IEEE 1386.1-2001 specification, which defines a PCI electrical interface for the CMC (Common Mezzanine Card) form factor.

A PMC module can be connected to the CP6006(X)-SA via the standard PMC connectors J21 (Jn1) and J22 (Jn2).

Table 15: PMC PCI Frequency Configuration

FREQUENCY	M66EN Signal J21 (Jn2)	DIP SWITCH SW2 SWITCH 3
33 MHz	Low	OFF
33 MHz		ON
66 MHz	High	OFF

<u>www.kontron.com</u> // 36

2.7.8. XMC Interface

For easy and flexible configuration a standard XMC connector, J20, is available. The board uses one x8 PCI Express 2.0 interface operating at 5.0 GT/s and compliant with the ANSI/VITA 42.0 and ANSI/VITA 42.3 specifications. x8 PCI Express 3.0 operating at 8 GT/s is available on request.

2.7.9. CompactPCI Interface

The CP6006(X)-SA supports a flexibly configurable, hot swap CompactPCI interface. In the system slot the PCI / PCI-X interface is in the transparent mode, and in the peripheral slot the CompactPCI interface is isolated so that it cannot communicate with the CompactPCI bus. This mode is known as "passive mode".

2.7.9.1. Board Functionality when Installed in System Slot

In the system slot, the CompactPCI interface can be either a 64-bit / 66 MHz PCI or PCI-X interface via a dedicated PCI Express-to-PCI-X bridge from Pericom (PI7C9X130).

The CP6006(X)-SA supports up to seven peripheral slots with 33 MHz and up to 4 peripheral slots with 66 MHz through a backplane.

The PCI Express-to-PCI-X bridge detects the PCI mode (PCI or PCI-X) and the bus speed (33 MHz or 66 MHz) via two PCI control signals on J1: PCIXCAP (pin B16) and M66EN (pin D21). The following configurations are supported by the CompactPCI interface.

Table 16: CompactPCI PCI / PCI-X Configuration

FREQUENCY	MODE	M66EN	PCIXCAP	DIP SWITCH SW2	DIP SWITCH SW2
		J1, PIN D21	J1, PIN B16	SWITCH 2	SWITCH 1
33 MHz	PCI	Low	Low	OFF	OFF
33 MHz	PCI		Low	OFF	ON
66 MHz	PCI	High	Low	OFF	OFF
66 MHz	PCI	High		ON	OFF
66 MHz	PCI-X		Pull-down resistor	OFF	OFF

NOTICE

To support 66 MHz PCI / PCI-X frequency, the CompactPCI signaling voltage (VI/O) must be 3.3 V.

The CP6006(X)-SA provides automatic voltage detection for the VI/O to switch the PCI frequency to 33 MHz in an 5V environment.

2.7.9.2. Board Functionality when Installed in Peripheral Slot (Passive Mode)

In a peripheral slot, the board receives power but does not communicate on the CompactPCI bus; all CompactPCI signals are isolated. In this configuration, the communication is achieved via the two Gigabit Ethernet ports as defined in the PICMG 2.16 specification.

2.7.9.3. Packet Switching Backplane (PICMG 2.16)

The CP6006(X)-SA supports two Gigabit Ethernet ports on the J3 connector in accordance with the CompactPCI Packet Switching Backplane Specification PICMG 2.16. The two ports are connected in the chassis via the CompactPCI Packet Switching Backplane to the Fabric slots "A" and "B". The PICMG 2.16 feature can be used in the system slot and in the peripheral slot as well.

2.7.9.4. Hot Swap Support

To ensure that a board may be removed and replaced in a working bus without disturbing the system, the following additional features are required:

- Power ramping
- Precharge
- Hot swap control and status register bits
- Automatic interrupt generation whenever a board is about to be removed or replaced
- A Hot Swap LED to indicate that the board may be safely removed

2.7.9.5. Power Ramping

On the CP6006(X)-SA a special hot swap controller is used to ramp up the onboard supply voltage. This is done to avoid transients on the +3.3V, +5V, +12V and -12V power supplies from the hot swap system. When the power supply is stable, the hot swap controller generates an onboard reset to put the board into a definite state.

2.7.9.6. Precharge

Precharge is provided on the CP6006(X)-SA by a resistor on each signal line (PCI bus) connected to a +1V reference voltage.

2.7.9.7. Handle Switch

A microswitch is situated in the extractor handle. The status of the handle is included in the onboard logic. The microswitch is connected to the onboard connector J13.

2.7.9.8. ENUM# Interrupt

If the board is operated in the system slot, the ENUM signal is an input.

2.7.9.9. Hot Swap LED

The blue HS LED can be switched on or off by software. It may be used, for example, to indicate that the shutdown process is finished and the board is ready for extraction.

2.7.10. CompactPCI Connectors

The complete CompactPCI connector configuration comprises up to four standard connectors (2mm Hard Metric) designated as J1, J2, J3 and two high-speed serial ZDplus connectors, J4 and J41.

Their functions are as follows:

- ▶ J1 and J2: 64-bit CompactPCI interface with PCI bus signals, arbitration, clock and power
- ▶ J3 and J5 with standard rear I/O interface functionality
- ▶ J4 and J41 for high-speed serial rear I/O interconnection


The CP6006(X)-SA is designed for a CompactPCI bus architecture. The CompactPCI standard is electrically identical to the PCI local bus. However, these systems are enhanced to operate in rugged industrial environments and to support multiple slots.

2.7.10.1. Connector Keying

The CompactPCI connector J1 supports guide lugs to ensure a correct polarized mating.

The CP6006(X)-SA supports universal PCI VI/O signaling voltages with one common termination resistor configuration and includes a PCI VI/O voltage detection circuit. If the PCI VI/O voltage is 5 V, the maximum supported PCI frequency is 33 MHz.

Figure 7: Compact PCI Connectors

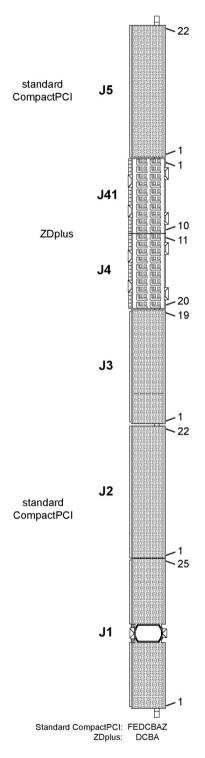

2.7.10.2. CompactPCI Connectors J1 and J2 Pinout

The CP6006(X)-SA is provided with two 2 mm x 2 mm pitch female CompactPCI bus connectors, J1 and J2.

Table 17: CompactPCI Bus Connector J1 System Slot Pinout

PIN	Z	Α	В	С	D	E	F
25	NC	5V	REQ64#	ENUM#	3.3V	5V	GND
24	NC	AD[1]	5V	V(I/O)	AD[0]	ACK64#	GND
23	NC	3.3V	AD[4]	AD[3]	5V	AD[2]	GND
22	NC	AD[7]	GND	3.3V	AD[6]	AD[5]	GND
21	NC	3.3V	AD[9]	AD[8]	M66EN	C/BE[0]#	GND
20	NC	AD[12]	GND	V(I/O)	AD[11]	AD[10]	GND
19	NC	3.3V	AD[15]	AD[14]	GND	AD[13]	GND
18	NC	SERR#	GND	3.3V	PAR	C/BE[1]#	GND
17	NC	3.3V	IPMB SCL	IPMB SDA	GND	PERR#	GND
16	NC	DEVSEL#	PCIXCAP	V(I/O)	STOP#	LOCK#	GND
15	NC	3.3V	FRAME#	IRDY#	BDSEL#	TRDY#	GND
14-12				Key Area			
11	NC	AD[18]	AD[17]	AD[16]	GND	C/BE[2]#	GND
10	NC	AD[21]	GND	3.3V	AD[20]	AD[19]	GND
9	NC	C/BE[3]#	NC	AD[23]	GND	AD[22]	GND
8	NC	AD[26]	GND	V(I/O)	AD[25]	AD[24]	GND
7	NC	AD[30]	AD[29]	AD[28]	GND	AD[27]	GND
6	NC	REQ0#	CPCI_Present#	3.3V	CLK0	AD[31]	GND
5	NC	RSV	RSV	RST#	GND	GNT0#	GND
4	NC	IPMB PWR	Health#	V(I/O)	RSV	RSV	GND
3	NC	INTA#	INTB#	INTC#	5V	INTD#	GND
2	NC	TCK	5V	TMS	NC	TDI	GND
1	NC	5V	-12V	TRST#	+12V	5V	GND

Table 18: CompactPCI Bus Connector J1 Peripheral Slot Pinout

PIN	Z	Α	В	С	D	E	F
25	NC	5V	*	*	3.3V	5V	GND
24	NC	*	5V	V(I/O)	*	*	GND
23	NC	3.3V	*	*	5V	*	GND
22	NC	*	GND	3.3V	*	*	GND
21	NC	3.3V	*	*	*	*	GND
20	NC	*	GND	V(I/O)	*	*	GND
19	NC	3.3V	*	*	GND	*	GND
18	NC	*	GND	3.3V	*	*	GND
17	NC	3.3V	IPMB SCL	IPMB SDA	GND	*	GND
16	NC	*	*	V(I/O)	*	*	GND
15	NC	3.3V	*	*	BDSEL#	*	GND
14-12				Key Area			
11	NC	*	*	*	GND	*	GND
10	NC	*	GND	3.3V	*	*	GND
9	NC	*	NC	*	GND	*	GND
8	NC	*	GND	V(I/O)	*	*	GND
7	NC	*	*	*	GND	*	GND
6	NC	*	CPCI_Present#	3.3V	*	*	GND
5	NC	RSV	RSV	RST#**	GND	*	GND
4	NC	IPMB PWR	Healthy#	V(I/O)	RSV	RSV	GND
3	NC	*	*	*	5V	*	GND
2	NC	TCK	5V	TMS	NC	TDI	GND
1	NC	5V	-12V	TRST#	+12V	5V	GND

A * indicates that the signal normally present at this pin is disconnected from the CompactPCI bus when the CP6006(X)-SA is inserted in a peripheral slot.

^{**} When the CP6006(X)-SA is inserted in a peripheral slot, the function of the RST# signal can be enabled or disabled.

Table 19: 64-bit CompactPCI Bus Connector J2 System Slot Pinout

PIN	Z	Α	В	С	D	E	F
22	NC	GA4	GA3	GA2	GA1	GA0	GND
21	NC	CLK6	GND	RSV	RSV	RSV	GND
20	NC	CLK5	GND	RSV	GND	RSV	GND
19	NC	GND	GND	IPMB2_SDA	IPMB2_SCL	IPMB2_Alert	GND
18	NC	RSV	RSV	RSV	GND	RSV	GND
17	NC	RSV	GND	PRST#	REQ6#	GNT6#	GND
16	NC	RSV	RSV	DEG#	GND	RSV	GND
15	NC	RSV	GND	FAL#	REQ5#	GNT5#	GND
14	NC	AD[35]	AD[34]	AD[33]	GND	AD[32]	GND
13	NC	AD[38]	GND	V(I/O)	AD[37]	AD[36]	GND
12	NC	AD[42]	AD[41]	AD[40]	GND	AD[39]	GND
11	NC	AD[45]	GND	V(I/O)	AD[44]	AD[43]	GND
10	NC	AD[49]	AD[48]	AD[47]	GND	AD[46]	GND
9	NC	AD[52]	GND	V(I/O)	AD[51]	AD[50]	GND
8	NC	AD[56]	AD[55]	AD[54]	GND	AD[53]	GND
7	NC	AD[59]	GND	V(I/O)	AD[58]	AD[57]	GND
6	NC	AD[63]	AD[62]	AD[61]	GND	AD[60]	GND
5	NC	C/BE[5]#	NC	V(I/O)	C/BE[4]#	PAR64	GND
4	NC	V(I/O)	RSV	C/BE[7]#	GND	C/BE[6]#	GND
3	NC	CLK4	GND	GNT3#	REQ4#	GNT4#	GND
2	NC	CLK2	CLK3	SYSEN#	GNT2#	REQ3#	GND
1	NC	CLK1	GND	REQ1#	GNT1#	REQ2#	GND

Table 20: 64-bit CompactPCI Bus Connector J2 Peripheral Slot Pinout

PIN	Z	А	В	С	D	E	F
22	NC	GA4	GA3	GA2	GA1	GA0	GND
21	NC	*	GND	RSV	RSV	RSV	GND
20	NC	*	GND	RSV	GND	RSV	GND
19	NC	GND	GND	IPMB2_SDA	IPMB2_SCL	IPMB2_Alert	GND
18	NC	RSV	RSV	RSV	GND	RSV	GND
17	NC	RSV	GND	*	*	*	GND
16	NC	RSV	RSV	DEG#	GND	RSV	GND
15	NC	RSV	GND	FAL#	*	*	GND
14	NC	*	*	*	GND	*	GND
13	NC	*	GND	V(I/O)	*	*	GND
12	NC	*	*	*	GND	*	GND
11	NC	*	GND	V(I/O)	*	*	GND
10	NC	*	*	*	GND	*	GND
9	NC	*	GND	V(I/O)	*	*	GND
8	NC	*	*	*	GND	*	GND
7	NC	*	GND	V(I/O)	*	*	GND
6	NC	*	*	*	GND	*	GND
5	NC	*	NC	V(I/O)	*	*	GND
4	NC	V(I/O)	RSV	*	GND	*	GND
3	NC	*	GND	*	*	*	GND
2	NC	*	*	SYSEN#	*	*	GND
1	NC	*	GND	*	*	*	GND

A * indicates that the signal normally present at this pin is disconnected from the CompactPCI bus when the CP6006(X)-SA is inserted in a peripheral slot.

2.7.10.3. CompactPCI Rear I/O Connectors J3 and J5 Pinout

The CP6006(X)-SA board provides rear I/O connectivity for peripherals. Standard PC interfaces are implemented and assigned to the front panel and to the rear I/O connectors J3 and J5.

When the rear I/O module is used, the signals of some of the main board/front panel connectors are routed to the module interface. Thus, the rear I/O module makes it much easier to remove the CPU in the rack as there is practically no cabling on the CPU board.

For the system rear I/O feature a special backplane is necessary. The CP6006(X)-SA with rear I/O is compatible with all standard 6U CompactPCI passive backplanes with rear I/O support.

The CP6006(X)-SA conducts all standard rear I/O signals through the J3 and J5 connectors.

Table 21: 64-bit CompactPCI Rear I/O Connector J3 Pinout

PIN	Z	А	В	С	D	E	F
19	NC	RIO_VCC	RIO_VCC	RIO_3.3V	RIO_+12V	RIO12V	GND
18	NC	LPa_DA+	LPa_DA-	GND	LPa_DC+	LPa_DC-	GND
17	NC	LPa_DB+	LPa_DB-	GND	LPa_DD+	LPa_DD-	GND
16	NC	LPb_DA+	LPb_DA-	GND	LPb_DC+	LPb_DC-	GND
15	NC	LPb_DB+	LPb_DB-	GND	LPb_DD+	LPb_DD-	GND
14	NC	LPa:LINK	LPb:LINK	LPab:CT1	RSV	FAN:SENSE2	GND
13	NC	LPa:ACT	LPb:ACT	RSV	RSV	FAN:SENSE1	GND
12	NC	RSV	RSV	GND	RSV	RSV	GND
11	NC	RSV	RSV	GND	RSV	RSV	GND
10	NC	USB1:VCC	USB0:VCC	GND	USB3:VCC	USB2:VCC	GND
9	NC	USB1:D-	USB1:D+	GND	USB3:D-	USB3:D+	GND
8	NC	USB0:D-	USB0:D+	GND	USB2:D-	USB2:D+	GND
7	NC	RIO_3.3V	GPI0	GPI1	GPI2	SPEAKER	GND
6	NC	VGA:RED	VGA:GREEN	VGA:SDA	DEBUG:CLK	DEBUG:DAT	GND
5	NC	VGA:BLUE	VGA:HSYNC	VGA:VSYNC	VGA:SCL	RSV	GND
4	NC	RSV	RSV	SPB:CTS	SPB:TXD	RSV	GND
3	NC	SPB:RTS	SPB:RXD	RSV	RSV	RSV	GND
2	NC	SPA:RI	SPA:DTR	SPA:CTS	SPA:TXD	RSV	GND
1	NC	SPA:RTS	SPA:RXD	SPA:DSR	SPA:DCD	RIO_ID1	GND

The RIO_XXX signals are power supply OUTPUTS to supply the rear I/O module with power. These pins MUST NOT be connected to any other power source, either within the backplane itself or within a rear I/O module.

Failure to comply with the above will result in damage to your board.

Table 22: CompactPCI Rear I/O Connector J3 Signals

SIGNAL	DESCRIPTION
SPA	COMA signaling (RS-232)
SPB	COMB signaling (RS-232)
VGA	Graphic signaling
USB0 to USB3	USB port signaling
SPEAKER	Standard PC speaker
FAN	Fan speed sensoring
DEBUG	Debug output
LPa	Rear I/O LAN Port A
LPb	Rear I/O LAN Port B
GPIO	General purpose digital input/output; 3.3 V only

The VGA interface can be used both on the front panel and on the rear I/O. However, the VGA signals are switched to front I/O or rear I/O, depending on the uEFI BIOS setting. COMA can be used either on the front panel or on the rear I/O. It is not possible to use COMA on the front panel and on the rear I/O simultaneously.

Table 23: CompactPCI Rear I/O Connector J5 Pinout

PIN	Z	Α	В	С	D	E	F
22	NC	GPI3	PWM1:OUT	GND	PWM2:OUT	BATT (3.0V)	GND
21	NC	Reserved	Reserved	GND	Reserved	SYS_WP#	GND
20	NC	GP00	Reserved	GND	GP01	Reserved	GND
19	NC	GND	GND	GND	Reserved	Reserved	GND
18	NC	HDMI2:D0+	HDMI2:D0-	GND	GND	GND	GND
17	NC	HDMI2:D2+	HDMI2:D2-	GND	HDMI2:D1+	HDMI2:D1-	GND
16	NC	RSV	HDMI2:HPDET	GND	GP02	GPO3	GND
15	NC	HDMI2:CLK+	HDMI2:CLK-	GND	HDMI2:SDA	HDMI2:SDC	GND
14	NC	GND	GND	GND	GND	GND	GND
13	NC	HDMI1:D0+	HDMI1:D0-	GND	HDMI1:D1+	HDMI1:D1-	GND
12	NC	HDMI1:D2+	HDMI1:D2-	GND	RSV	RSV	GND
11	NC	RSV	HDMI1:HPDET	GND	HDMI1:SDA	HDMI1:SDC	GND
10	NC	HDMI1:CLK+	HDMI1:CLK-	GND	RSV	RSV	GND
9	NC	GND	GND	GND	GND	GND	GND
8	NC	SATA3:TX+	SATA3:TX-	GND	SATA3:RX+	SATA3:RX-	GND
7	NC	GND	GND	GND	GND	GND	GND
6	NC	SATA2:TX+	SATA2:TX-	GND	SATA2:RX+	SATA2:RX-	GND
5	NC	GND	GND	GND	GND	GND	GND
4	NC	SATA1:TX+	SATA1:TX-	GND	SATA1:RX+	SATA1:RX-	GND
3	NC	GND	GND	GND	GND	GND	GND
2	NC	SATA0:TX+	SATA0:TX-	GND	SATA0:RX+	SATA0:RX-	GND
1	NC	GND	GND	GND	GND	GND	GND

Table 24: CompactPCI Rear I/O Connector J5 Signals

SIGNAL	DESCRIPTION
SATA03	SATA Port 03 Signaling
HDMI1	HDMI signaling
HDMI2	HDMI signaling
HDA	Reserved
PWM	Pulse width modulation output for fan
GPIO	General purpose digital input/output; 3.3 V only
SYS_WP#	System write protection for non-volatile memory devices; 3.3 V only
BATT (3.0V)	Back-up power input for RTC and CMOS RAM; 3.0 V only

2.7.10.4. High-Speed Serial Rear I/O Connectors J41 and J4 Pinout (CP6006X-SA)

The CP6006X-SA provides rear I/O connectivity via two ZDplus high-speed serial rear I/O connectors, J4 and J41, and supports the following high-speed serial rear I/O interfaces:

- Two 10GBASE-KR interfaces
- One x4 PCI Express 2.0 operating at 5 GT/s as a root complex controller only

For the system rear I/O feature a special backplane is necessary. The CP6006X-SA is compatible with all Kontron 6U CompactPCI passive backplanes that are compliant with the PICMG 2.20 specification.

Table 25: High-Speed Serial Rear I/O Connector J41 Pinout

	А		В		С		D	D	
POS	SIGNAL	DRIVEN BY	SIGNAL	DRIVEN BY	SIGNAL	DRIVEN BY	SIGNAL	DRIVEN BY	
1	PE1_RST#	Board/ Tristate*	PE2_RST#	Board/ Tristate*	PE_END_ROOT#	BCKPL	PE_1x8_2x4#	 (BCKPL)	
2	40GBE1_TX0+	Board	40GBE1_TX0-	Board	40GBE1_RX0-	BCKPL	40GBE1_RX0+	BCKPL	
3	NC (40GBE1_TX1+)		NC (40GBE1_TX1-)		NC (40GBE1_RX1-)		NC (40GBE1_RX1+)		
4	NC (40GBE1_TX2+)		NC (40GBE1_TX2-)		NC (40GBE1_RX2-)		NC (40GBE1_RX2+)		
5	NC (40GBE1_TX3+)		NC (40GBE1_TX3-)		NC (40GBE1_RX3-)		NC (40GBE1_RX3+)		
6	40GBE2_TX0+	Board	40GBE2_TX0-	Board	40GBE2_RX0-	BCKPL	40GBE2_RX0+	BCKPL	
7	NC (40GBE2_TX1+)		NC (40GBE2_TX1-)		NC (40GBE2_RX1-)		NC (40GBE2_RX1+)		
8	NC (40GBE2_TX2+)		NC (40GBE2_TX2-)		NC (40GBE2_RX2-)		NC (40GBE2_RX2+)		
9	NC (40GBE2_TX3+)		NC (40GBE2_TX3-)		NC (40GBE2_RX3-)		NC (40GBE2_RX3+)		
10	SATA1_TX+	Board	SATA1_TX-	Board	SATA1_RX-	BCKPL	SATA1_RX+	BCKPL	

Table 26: High-Speed Serial Rear I/O Connector J4 Pinout

	А		В		С		D	
POS	SIGNAL	DRIVEN BY	SIGNAL	DRIVEN BY	SIGNAL	DRIVEN BY	SIGNAL	DRIVEN BY
11	SATA2_TX+	Board	SATA2_TX-	Board	SATA2_RX-	BCKPL	SATA2_RX+	BCKPL
12	PE1_TX7+	Board	PE1_TX7-	Board	PE1_RX7-	BCKPL	PE1_RX7+	BCKPL
13	PE1_TX6+	Board	PE1_TX6-	Board	PE1_RX6-	BCKPL	PE1_RX6+	BCKPL
14	PE1_TX5+	Board	PE1_TX5-	Board	PE1_RX5-	BCKPL	PE1_RX5+	BCKPL
15	PE1_TX4+	Board	PE1_TX4-	Board	PE1_RX4-	BCKPL	PE1_RX4+	BCKPL
16	PE1_TX3+	Board	PE1_TX3-	Board	PE1_RX3-	BCKPL	PE1_RX3+	BCKPL
17	PE1_TX2+	Board	PE1_TX2-	Board	PE1_RX2-	BCKPL	PE1_RX2+	BCKPL
18	PE1_TX1+	Board	PE1_TX1-	Board	PE1_RX1-	BCKPL	PE1_RX1+	BCKPL
19	PE1_TX0+	Board	PE1_TX0-	Board	PE1_RX0-	BCKPL	PE1_RX0+	BCKPL
20	PE1_CLK+	Board/	PE1_CLK-	Board/	NC		NC	
		Tristate*		Tristate*	(PE2_CLK-)		(PE2_CLK+)	

^{*} If the board is plugged in a backplane slot with PCI Express root-complex configuration, the signals are driven by the board. If the board is plugged in a backplane slot with PCI Express endpoint configuration, the signals are in Tristate mode.

Table 27: High-Speed Serial Rear I/O Connectors J41 and J4 Signal Description

SIGNAL	DESCRIPTION
40GBE1_TX/RX	10GBASE-KR/40GBASE-KR4 port 1 transmit/receive signals (10GBASE-KR only)
40GBE2_TX/RX	10GBASE-KR/40GBASE-KR4 port 2 transmit/receive signals (10GBASE-KR only)
SATA1_TX/RX	SATA port 1 transmit/receive signals
SATA2_TX/RX	SATA port 1 transmit/receive signals
PE1_CLK	PCI Express reference clock for 1 x8 or 1 x4 configuration
PE2_CLK	PCI Express reference clock for 2 x4 configuration (not supported on the CP6006(X)-SA)
PE1_RST#	PCI Express system reset for 1 x8 or 1 x4 configuration
PE2_RST#	PCI Express system reset for 2 x4 configuration (not supported on the CP6006(X)-SA)
PE_END_ROOT#	PCI Express endpoint high or root-complex backplane configuration
	1 = endpoint configuration
	0 = root-complex configuration
PE_1x8_2x4#	PCI Express for 1 x8 or 2 x4 backplane configuration (not supported on the CP6006(X)-SA)

2.7.11. High-Speed Serial Rear I/O Interconnection

The high-speed serial rear I/O interconnection has been designed to meet the PICMG 2.20 R1.0 standard. In addition, Kontron has made minor improvements to ensure maximum signal integrity, such as:

- upgraded high-speed ZDplus connector mechanically compliant with the PICMG 2.20 providing better shielding to support up to 15 GHz signal frequency
- high-speed interconnection supporting 10GBASE-KR/40GBASE-KR4, one x8 PCI Express 3.0 port operating at 8 GT/s and two SATA 6 Gb/s ports



The PICMG 2.20 configuration allows coexistence with PICMG 2.16 fabrics.

Table 28: High-Speed Serial Rear I/O Interconnection Port Mapping

CON	POS	PICMG 2.20	PORT DEFINITION	CP6006X-SA
J41	1	AUX	PCIe Control	PCIe Control
	2	PORT 1	10GBASE-KR/	10GBE1
	3	PORT 2	40GBASE-KR4 Port 1	
	4	PORT 3		
	5	PORT 4		
	6	PORT 5	10GBASE-KR/	10GBE2
	7	PORT 6	40GBASE-KR4 Port 2	
	8	PORT 7		
	9	PORT 8		
	10	PORT 9	SATA 6 Gb/s Port 1	SATA Port 4
J4	11	PORT 10	SATA 6 Gb/s Port 2	SATA Port 5
	12	PORT 11	1 x8 PCle	1 x8 PCle
	13	PORT 12	Gen 3	Gen 3
	14	PORT 13		
	15	PORT 14		
	16	PORT 15		
	17	PORT 16		
	18	PORT 17		
	19	PORT 18		
	20	CLOCK	PCIe Reference Clock	PCIe Reference Clock

<u>www.kontron.com</u> // 49

3/ Configuration

3.1. DIP Switch Configuration

3.1.1. DIP Switch SW1

The DIP switch SW1 serves for general board configuration.

Table 29: DIP Switch SW1 Functionality

SWITCH	SETTING	FUNCTIONALITY
1	0FF	Boot-up with POST code indication on LED3-0
	ON	Boot-up with no POST code indication on LED3–0
2	0FF	Boot from the standard SPI boot flash
	ON	Boot from the recovery SPI boot flash
3	0FF	Non-volatile memory write protection disabled (if no other write protection sources are enabled)
	ON	Non-volatile memory write protection enabled
4	0FF	Boot using the currently saved uEFI BIOS settings
	ON	Clear the uEFI BIOS settings and use the default values

The default setting is indicated by using italic bold.

To clear the uEFI BIOS settings and the passwords, proceed as follows:

- 1. Set DIP switch SW1, switch 4, to the ON position.
- **2.** Apply power to the system.
- 3. Wait 30 seconds and then remove power from the system. During this time period no messages are displayed.
- 4. Set DIP switch SW1, switch 4, to the OFF position.

3.1.2. DIP Switch SW2

The DIP switch SW2 serves for CompactPCI and PMC PCI interface configuration.

Table 30: DIP Switch SW2 Functionality

SWITCH	SETTING	FUNCTIONALITY
1	0FF	CompactPCI frequency 33/66 MHz, auto detection via the backplane
	ON	CompactPCI frequency configured to 33 MHz
2	0FF	CompactPCI mode (PCI/PCI-X) auto detection via the backplane
	ON	CompactPCI interface configured to PCI mode
3	0FF	PMC PCI frequency 33/66 MHz, auto detection via the PMC interface
	ON	PMC PCI frequency configured to 33 MHz
4	0FF	Reserved
	ON	

3.2. System Write Protection

The CP6006(X)-SA provides write protection for non-volatile memories via the DIP switch SW1, the uEFI Shell and a backplane pin. If one of these sources is enabled, the system is write protected. Please contact Kontron for further information before using these functions.

3.3. CP6006(X)-SA-Specific Registers

Table 31: CP6006(X)-SA-Specific Registers

ADDRESS	DEVICE
0x284	Write Protection Register (WPROT)
0x285	Reset Status Register (RSTAT)
0×288	Board ID High Byte Register (BIDH)
0x28A	Geographic Addressing Register (GEOAD)
0x28C	Watchdog Timer Control Register (WTIM)
0x28D	Board ID Low Byte Register (BIDL)
0x290	LED Configuration Register (LCFG)
0×291	LED Control Register (LCTRL)
0x292	General Purpose Output Register (GPOUT)
0×293	General Purpose Input Register (GPIN)

3.3.1. Write Protection Register (WPROT)

The Write Protection Register holds the write protect signals for non-volatile devices.

Table 32: Write Protection Register (WPROT)

ADDRESS				0x2	284			
BIT	7	6	5	4	3	2	1	0
NAME	SWP		Reserved		SFWP	DSWP	BSWP	SSWP
ACCESS	R		R		R	R	R	R/W
RESET	0		000		0	0	0	0
BITF	IELD				DESCRIPTION			
7	SWP	System writ	te protection	status:				
		0 = Onboard	d non-volatil	e memory de	vices not writ	te protected		
		1 = Onboard	non-volatile	e memory dev	vices write pr	otected		
3	SFWP	Reserved						
2	DSWP	This bit refl	ects the stat	e of the syste	m write prote	ection via DIF	switch SW1,	switch 3:
		0 = System	not write pro	tected via DI	P switch			
		1 = System v	write protect	ed				
1	BSWP	This bit refl	ects the stat	e of the syste	m write prote	ection via bad	kplane (SYS	_WP#):
		0 = System	not write pro	tected via ba	ckplane			
		1 = System v	write protect	ed				
0	SSWP	This bit refl	ects the stat	e of the syste	m write prote	ection via sof	tware:	
		0 = System	0 = System devices not write protected via software					
		1 = System v	write protect	ed				
		If this bit is	programmed	l once, it canr	ot be reprogi	rammed.		

3.3.2. Reset Status Register (RSTAT)

The Reset Status Register is used to determine the host's reset source.

Table 33: Reset Status Register (RSTAT)

ADDRESS				0x2	285				
BIT	7	6	5	4	3	2	1	0	
NAME	PORS	Reserved	SRST	Reserved	IPRS	FPRS	CPRS	WTRS	
ACCESS	R/W	R	R/W	R	R/W	R/W	R/W	R/W	
RESET	N/A	0	0	0	0	0	0	0	
BITF	IELD			ı	DESCRIPTION	I			
7	PORS	1 = System r	reset genera	ted by warm ted by power ears the bit.		set			
5	SRST	0 = Reset is 1 = Reset is The uEFI BIO	Software reset status: 0 = Reset is logged by the IPMI controller 1 = Reset is not logged by IPMI controller The uEFI BIOS / software sets this bit to inform the IPMI controller that the next reset should not be logged.						
3	IPRS	0 = System 1 = System r	ller reset sta reset not ger eset generat to this bit cle	nerated by IPI ted by IPMI	MI				
2	FPRS	0 = System 1 = System r	reset not ger	reset status: nerated by fro ted by front p ears the bit.	ont panel res	et			
1	CPRS	CompactPCI reset status (PRST signal): 0 = System reset not generated by CompactPCI reset input 1 = System reset generated by CompactPCI reset input Writing a '1' to this bit clears the bit.							
0	WTRS	0 = System 1 = System r	_	ted by Watch ted by Watch	_				

NOTICE

The Reset Status Register is set to default values by power-on (cold) reset, not by a warm reset.

3.3.3. Board ID High Byte Register (BIDH)

Table 34: Board ID High Byte Register (BIDH)

ADDRESS	0x288									
BIT	7	6	5	4	3	2	1	0		
NAME		BIDH								
ACCESS		R								
RESET		0xB4								
BITF	IELD			ı	DESCRIPTION	l				
7	BIDH	Board ident	ification:							
		CP6006-SA	: 0xB44	40						
		CP6006X-S	A: 0xB44	41						

3.3.4. Geographic Addressing Register (GEOAD)

The Geographic Addressing Register holds the CompactPCI geographic address (site number) used to assign the Intelligent Platform Management Bus (IPMB) address to the CP6006(X)-SA.

Table 35: Geographic Addressing Register (GEOAD)

ADDRESS	0x28A								
BIT	7	6	5	4	3	2	1	0	
NAME	Reserved				GA				
ACCESS	R				R				
RESET		000			N/A				
BITF	IELD				DESCRIPTION	l			
75	Res.	Reserved	Reserved						
40	GA	Geographic	address						

NOTICE

The Geographic Addressing Register is set to default values by power-on (cold) reset, not by a warm reset.

3.3.5. Watchdog Timer Control Register (WTIM)

Table 36: Watchdog Timer Control Register (WTIM)

ADDRESS				0x2	.8C				
BIT	7	6	5	4	3	2	1	0	
NAME	WTE	WMD WEN/WT WTM							
ACCESS	R/W	R/	W	R/W		R/	W .		
RESET	0	0	0	0		00	00		
BITF	IELD			ı	DESCRIPTION	J			
7	WTE	0 = Watchdo 1 = Watchdo	imer expired og timer has og timer has to this bit re	not expired expired.					
65	WMD	Watchdog n 00 = Timer o 01 = Reset n 10 = Interru	Writing a '1' to this bit resets it to 0. Watchdog mode: 00 = Timer only mode 01 = Reset mode 10 = Interrupt mode 11 = Cascaded mode (dual-stage mode)						
4	WEN/WT R	the Watchd enabled, thi indicate a '1' 1 = Watchdo Writing a '1'	Vatchdog tin Prior og is enablec s bit cannot l og timer enab	uses the Wat	ed dog being en: as WTR. Once As long as th	e the Watchd ne Watchdog	og timer has timer is enat	been bled, it will	
30	WTM	Watchdog t 0000 = 0.12 0001 = 0.25 0010 = 0.5 s 0011 = 1 s 0100 = 2 s 0101 = 4 s 0110 = 8 s 0111 = 16 s	s 1001 = 1010 = 1011 = 1101 = 1110 = 1110 =	1000 = 32 = 64 s = 128 s	2 s				

3.3.6. Board ID Low Byte Register (BIDL)

Table 37: Board ID Low Byte Register (BIDL)

ADDRESS	0x28D									
BIT	7	6	5	4	3	2	1	0		
NAME		BIDL								
ACCESS		R								
RESET		0x40 (CP6006-SA) / 0x41 (CP6006X-SA)								
BITF	IELD				DESCRIPTION					
7	BIDL	Board ident	Board identification:							
		CP6006-SA:	0xB44	40						
		CP6006X-S	A: 0xB44	41						

3.3.7. LED Configuration Register (LCFG)

The LED Configuration Register holds a series of bits defining the onboard configuration for the front panel General Purpose LEDs.

Table 38: LED Configuration Register (LCFG)

ADDRESS		0×290							
BIT	7	6	5	4	3 2 1 0				
NAME		Rese	rved			LC	ON		
ACCESS		F	₹			R/	W		
RESET		00	00			00	00		
BITFIELD DESCRIPTION				I					
30	LCON	0001 = Gene 0010 = LEDs LED	T Mode (LED eral Purpose s are dedicate 0: 10 Gigabit 1: 10 Gigabit & 2: SATA LED	s build a bina Mode (LEDs a ed to functior Ethernet con Ethernet cont	are controlled ns: troller port 1	d via the LCTF	_		

Beside the configurable functions described above, LED3–0 fulfill also a basic debug function during the power-up phase as long as the first access to Port 80 is processed. For further information on reading the 8-bit uEFI BIOS POST Code, refer to Chapter 2.7.1.3, "General Purpose LEDs".

3.3.8. LED Control Register (LCTRL)

The LED Control Register enables the user to switch on and off the front panel General Purpose LEDs.

Table 39: LED Control Register (LCTRL)

ADDRESS		0x291							
BIT	7	6	5	4	3	2	1	0	
NAME		LCI	MD			LC	OL		
ACCESS		R/	W			R/	/W		
RESET		00	00			00	00		
BITF	IELD			ı	DESCRIPTION	I			
74	LCMD	0001 = Get I 0010 = Get I 0011 = Get L	LED0 1000 LED1 1001 = LED2 1010 = LED3 1011 =	= Set LED1 = Set LED2	1 = Reserved				
30	LCOL	LED color: 0000 = Off 0001 = Gree 0010 = Red 0011 = Red+ 0100 - 1111 =	Green						

NOTICE

The LED Control Register can only be used if the General Purpose LEDs indicated in the "LED Configuration Register" (see Table 38) are configured in General Purpose Mode.

3.3.9. General Purpose Output Register (GPOUT)

The General Purpose Output Register holds the general purpose output signals of the rear I/O CompactPCI connectors.

Table 40: General Purpose Output Register (GPOUT)

ADDRESS	0x292							
BIT	7	6	5	4	3	2	1	0
NAME	Reserved			GPO3	GPO2	GP01	GP00	
ACCESS	R			R/W	R/W	R/W	R/W	
RESET	0000			0	0	0	00	
BITF	FIELD DESCRIPTION							
30	GP030	General purpose output signals:						
		0 = Output low						
		1 = Output high						

3.3.10. General Purpose Input Register (GPIN)

The General Purpose Input Register holds the general purpose input signals of the rear I/O CompactPCI connectors.

Table 41: General Purpose Input Register (GPIN)

ADDRESS	0x293							
BIT	7	6	5	4	3	2	1	0
NAME	Reserved			GPI3	GPI2	GPI1	GPI0	
ACCESS	R			R	R	R	R	
RESET	0000			1	1	1	1	
BITF	FIELD DESCRIPTION			l				
30	GPI3 0	General purpose input signals:						
		0 = Input low						
		1 = Input high						

<u>www.kontron.com</u> // 58

4/ Power Considerations

4.1. CP6006(X)-SA Voltage Ranges

The CP6006(X)-SA has been designed for optimal power input and distribution. Still it is necessary to observe certain criteria essential for application stability and reliability.

The system power supply must comply with the CompactPCI® specification.

The following table specifies the ranges for the input power voltage within which the board is functional.

Table 42: Operational Input Voltage Range

INPUT SUPPLY VOLTAGE	ABSOLUTE RANGE
+3.3 V	3.2 V min. to 3.47 V max.
+5 V	4.85 V min. to 5.25 V max.
+12 V	11.4 V min. to 12.6 V max.
-12 V	-11.4 V min. to -12.6 V max.



Failure to comply with the instructions above may result in damage to the board or improper operation.

4.1.1. Start-Up Requirement

Power supplies must comply with the following guidelines, in order to be used with the CP6006(X)-SA:

- Beginning at 10% of the nominal output voltage, the voltage must rise within > 0.1 ms to < 20 ms to the specified regulation range of the voltage. Typically: > 5 ms to < 15 ms.
- There must be a smooth and continuous ramp of each DC output voltage from 10% to 90% of the regulation hand
- The slope of the turn-on waveform shall be a positive, almost linear voltage increase and have a value from 0 V to nominal Vout.

4.1.2. Power-Up Sequence

The +5 VDC output level must always be equal to or higher than the +3.3 VDC output during power-up and normal operation.

Both voltages must reach their minimum in-regulation level not later than 20 ms after the output power ramp start.

4.1.3. Regulation

The power supply shall be unconditionally stable under line, load, unload and transient load conditions including capacitive loads. The operation of the power supply must be consistent even without the minimum load on all output lines.

NOTICE

All of the input voltages must be functionally coupled to each other so that if one input voltage fails, all other input voltages must be regulated proportionately to the failed voltage. For example, if the +5V begins to decrease, all other input voltages must decrease accordingly. This is required in order to preclude cross currents within the CP6006(X)-SA. Failure to comply with above may result in damage to the board or improper system operation.

NOTICE

If the main power input is switched off, the supply voltages will not go to 0V instantly. It will take a couple of seconds until the capacitors are discharged. If the voltage rises again before it has gone below a certain level, the circuits may enter a latch-up state where even a hard RESET will not help any more. The system must be switched off for at least 10 seconds before it may be switched on again. If problems still occur, turn off the main power for 30 seconds before turning it on again.

4.2. Power Consumption

The goal of this description is to provide a method to calculate the power consumption for the CP6006(X)-SA baseboard and for additional configurations. The processor and the memory dissipate the majority of the thermal power.

The power consumption measurements were carried out using the following testing parameters:

- \triangleright CP6006(X)-SA installed in the system slot
- Ethernet ports not connected
- ▶ 16 GB/32 GB DDR4 SDRAM in dual-channel mode
- +3.3 V, 5 V, and 12 V main supply voltage
- 2.5 m/s airflow

The operating systems used were uEFI Shell and Windows® 7, 64-bit. All measurements were conducted at an ambient temperature of 25 °C. The power consumption values indicated in the tables below can vary depending on the ambient temperature. This can result in deviations of the power consumption values of up to 15%.

The power consumption was measured using the following processors:

- ► Intel® XEON® D-1539, 1.6 GHz, 12 MB cache
- Intel® XEON® D-1548, 2.0 GHz, 12 MB cache

The power consumption was measured using the following configurations:

Work load: uEFI Shell

For this measurement the processor cores were active, the graphics controller was in idle state (no application running) and Intel® Turbo Boost Technology was enabled.

Work load: Idle

For this measurement all processor cores were in idle state (no application running) and Intel® Turbo Boost Technology was enabled.

Work load: Typical

For this measurement all processor cores were operating at maximum work load while Intel® Turbo Boost Technology was disabled. These values represent the power dissipation reached under realistic, OS-controlled applications with the processor operating at maximum performance.

Work load: Maximum

These values represent the maximum power dissipation achieved through the use of specific tools to heat up the processor cores. For this measurement Intel® Turbo Boost Technology was enabled. These values are unlikely to be reached in real applications.

NOTICE

To support the extended temperature range (+70°C), the maximum power consumption of the processors must be reduced. The maximum power consumption of the Intel® XEON® D-1539 and Intel® XEON® D-1548 processors can be reduced to approx. 10 W using the Power Limit Reduction feature. This feature can be configured via the kBoardConfig uEFI Shell command. For information on this command, refer to the Chapter 9, uEFI BIOS.

Table 43: Workload: uEFI Shell

NOMINAL VOLTAGE	XEON® D-1539 1.6 GHz	XEON® D-1548 2.0 GHz
+12 V	0.1 W	0.1 W
5 V	23.0 W	27.0 W
3.3 V	7.0 W	7.0 W
Total	30.1 W	34.1 W

Table 44: Workload: Idle

NOMINAL VOLTAGE	XEON® D-1539 1.6 GHz	XEON® D-1548 2.0 GHz
+12 V	0.1 W	0.1 W
5 V	12.0 W	12.0 W
3.3 V	8.0 W	8.0 W
Total	20.1 W	20.1 W

Table 45: Workload: Typical

NOMINAL VOLTAGE	XEON® D-1539 1.6 GHz	XEON® D-1548 2.0 GHz
+12 V	0.1 W	0.1 W
5 V	37 W	48.0 W
3.3 V	8 W	8.0 W
Total	45.1 W	56.1W

Table 46: Workload: Maximum

NOMINAL VOLTAGE	XEON® D-1539 1.6 GHz	XEON® D-1548 2.0 GHz
+12 V	0.1 W	0.1 W
5 V	48.0 W	64.0 W
3.3 V	8.0 W	8.0 W
Total	56.1 W	72.1 W

4.2.1. Power Consumption of the CP6006(X)-SA Accessories

The following table indicates the power consumption of the CP6006(X)-SA accessories.

Table 47: Power Consumption of CP6006(X)-SA Accessories

POWER CONSUMPTION	POWER 5 V	POWER 3.3 V
DDR4 SDRAM update from 16 GB to 32 GB	_	approx. 1.8 W
DDR4 SDRAM update from 32 GB to 64 GB	_	approx. 2.0 W
SATA M.2 module	_	approx. 1.0-2.0 W

4.2.2. Power Consumption per Gigabit Ethernet Port

The following table indicates the power consumption per Gigabit Ethernet port.

Table 48: Power Consumption per Gigabit Ethernet Port

POWER CONSUMPTION	POWER 5 V	POWER 3.3 V
One 1000 Mb/s Ethernet port connected	_	approx. 0.5 W

4.2.3. Power Consumption per 10 Gigabit Ethernet Port (CP6006X-SA)

The following table indicates the power consumption per 10 Gigabit Ethernet port.

Table 49: Power Consumption per 10 Gigabit Ethernet Port

POWER CONSUMPTION	POWER 5 V	POWER 3.3 V
One 10GBASE-KR Ethernet port connected and active	_	approx. 1.1 W

4.2.4. Power Consumption of PMC Modules

A maximum power of 7.5 W is available on the PMC slot. This is in accordance with the draft standard P1386/Draft 2.4a. The maximum power of 7.5 W can be arbitrarily divided on the 3.3 V and 5 V voltage lines.

The following table indicates the current of a PMC module.

Table 50: PMC Module Current

VOLTAGE	CONTINUOUS CURRENT	PEAK CURRENT
3.3 V	2.27 A	3.0 A
5 V	1.5 A	2.0 A
+12 V	0.6 A	0.8 A
-12 V	0.4 A	0.4 A

4.2.5. Power Consumption of XMC Modules

A maximum power of 20 W is available on the XMC slot and it can be arbitrarily divided on the 3.3 V and 5 V (VPWR) voltage lines. XMC modules are based on 3.3 V power along with variable power (VPWR) defined as either 5 V or 12 V in the ANSI/VITA 42.0-200x XMC Switched Mezzanine Card Auxiliary Standard specification. On the CP6006(X)-SA, the VPWR is configured to 5 V.

The following table indicates the current of an XMC module.

Table 51: XMC Module Current

VOLTAGE	CONTINUOUS CURRENT	PEAK CURRENT
3.3 V	1.0 A	1.25 A
5 V (VPWR)	3.0 A	3.5 A
+12 V	0.6 A	0.8 A
-12 V	0.4 A	0.4 A



XMC integrators should carefully review the power ratings, cooling capacity and airflow requirements in the application prior to installation of an XMC module on the CP6006(X)-SA.

5/ Thermal Considerations

The thermal characteristic graphs shown in the following sections are intended to serve as guidance for reconciling the required computing power with the necessary system volumetric airflow over the ambient temperature. The graphs contain two curves representing upper level working points based on different levels of average CPU utilization. When operating below the corresponding curve, the CPU runs without any intervention of thermal supervision (the CPU is below 102°C). When operated above the corresponding curve, various thermal protection mechanisms may take effect resulting in temporarily reduced CPU performance or finally in an emergency stop in order to protect the CPU and the chipset from thermal destruction. In real applications this means that the board can be operated temporarily at a higher ambient temperature or at a reduced flow rate and still provide some margin for temporarily requested peak performance before thermal protection will be activated.

An airflow of 2.0 m/s to 3.0 m/s is a typical value for a standard Kontron ASM rack. For other racks or housings the available airflow will differ. The maximum ambient operating temperature must be determined for such environments.

How to read the diagram

Select a specific CPU and choose a specific working point. For a given flow rate there is a maximum airflow input temperature (= ambient temperature) provided. Below this operating point, thermal supervision will not be activated. Above this operating point, thermal supervision will become active protecting the CPU from thermal destruction. The minimum airflow rate provided must be more than the value specified in the diagram.

Volumetric flow rate

The volumetric flow rate refers to an airflow through a fixed cross-sectional area (i.e. slot width x depth. The volumetric flow rate is specified in m^3/h (cubic-meter-per-hour) or cfm (cubic-feet-per-minute) respectively.

Conversion: $1 \text{ cfm} = 1.7 \text{ m}^3/\text{h}; 1 \text{ m}^3/\text{h} = 0.59 \text{ cfm}$

Airflow

At a given cross-sectional area and a required flow rate, an average, homogeneous airflow speed can be calculated using the following formula:

Airflow = Volumetric flow rate / area.

The airflow is specified in m/s (meter-per-second) or in fps (feet-per-second) respectively.

Conversion: 1 fps = 0.3048 m/s; 1 m/s = 3.28 fps

The following figures illustrate the thermal operational limits of the CP6006(X)-SA taking into consideration power consumption vs. ambient air temperature vs. airflow rate.



The CP6006(X)-SA must be operated within the thermal operational limits indicated below.

5.1. Operational Limits for the CP6006(X)-SA

Figure 8: CP6006(X)-SA with XEON D-1539, 1.66 GHz




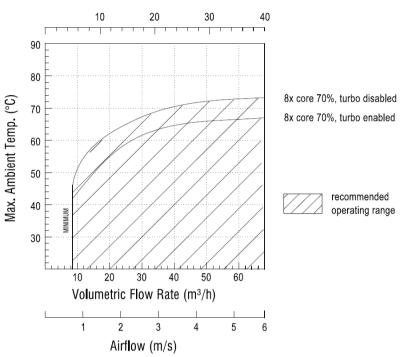


Figure 9: CP6006(X)-SA with XEON D-1548, 2.0 GHz

Airflow Rate (CFM)

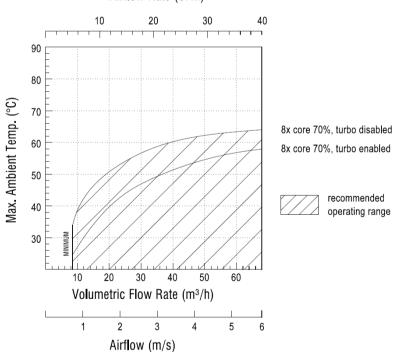

5.1.1. Peripherals

When determining the thermal requirements for a given application, peripherals to be used with the CP6006(X)-SA must also be considered. Devices such as HDDs, SSDs, PMC modules, XMC modules which are directly attached to the CP6006(X)-SA must also be capable of being operated at the temperatures foreseen for the application. It may very well be necessary to revise system requirements to comply with operational environment conditions. In most cases, this will lead to a reduction in the maximum allowable ambient operating temperature or even require active cooling of the operating environment.

NOTICE

As Kontron assumes no responsibility for any damage to the CP6006(X)-SA or other equipment resulting from overheating of the CPU, it is highly recommended that system integrators as well as end users confirm that the operational environment of the CP6006(X)-SA complies with the thermal considerations set forth in this document.

6/Installation

This chapter is oriented towards an application environment. Some aspects may, however, be applicable to a development environment.

6.1. Safety

To ensure personnel safety and correct operation of this product, the following safety precautions must be observed:

- All operations involving the CP6006(X)-SA require that personnel be familiar with system equipment, safety requirements and the CP6006(X)-SA.
- This product contains electrostatically sensitive components which can be seriously damaged by electrical static discharge (ESD). Therefore, proper handling must be ensured at all times.
- Whenever possible, unpack or pack this product only at EOS/ESD safe work stations. Where a safe work station is not guaranteed, it is important for the user to be electrically discharged before touching the product with his/her hands or tools. This is most easily done by touching a metal part of your system housing.
- Do not handle this product out of its protective enclosure while it is not used for operational purposes unless it is otherwise protected.
- Do not touch components, connector-pins or traces.

Kontron assumes no liability for any damage resulting from failure to comply with these requirements.

6.2. General Instructions on Usage

In order to maintain Kontron's product warranty, this product must not be altered or modified in any way. Changes or modifications to the device, which are not explicitly approved by Kontron and described in this manual or received from Kontron's Technical Support as a special handling instruction, will void your warranty.

This device should only be installed in or connected to systems that fulfill all necessary technical and specific environmental requirements. This applies also to the operational temperature range of the specific board version, which must not be exceeded. If batteries are present, their temperature restrictions must be taken into account.

6.3. Board Installation

The CP6006(X)-SA is designed for use either as a system board or as an autonomous CPU board in a peripheral slot.

When installed in the system slot, the CP6006(X)-SA provides all required functions for supporting the hot swapping of peripheral boards which are capable of being hot swapped.

When installed in a peripheral slot, the CP6006(X)-SA operates autonomously, meaning that it only draws power from the backplane.

6.3.1. Hot Swap Insertion

Prior to following the steps below, ensure that the safety requirements are met.

To insert the CP6006(X)-SA in a running system proceed as follows:

- 1. Ensure that the board ejection handles are open.
- 2. Insert the board into the slot designated until it makes contact with the backplane connectors.
- 3. Using the ejector handles, engage the board with the backplane. When the ejector handles are closed, the board is engaged.
- 4. The blue HS LED turns on and then off indicating that the CP6006(X)-SA is operating.
- 5. Fasten the front panel retaining screws.
- 6. Connect all external interfacing cables to the board as required.

6.3.2. Hot Swap Removal

Prior to following the steps below, ensure that the safety requirements are met. When removing a board from the system, particular attention must be paid to the components that may be hot, such as heat sink, etc.

To remove the CP6006(X)-SA from a running system proceed as follows:


- Unlock the board ejection handles by pressing their release buttons.
 The blue HS LED starts blinking indicating that the shutdown process has begun.
- **2.** After approximately 1 to 15 seconds, the HS LED turns on steady indicating that the CP6006(X)-SA may be removed from the system.
- 3. Disconnect any interfacing cables that may be connected to the board.
- 4. Unscrew the front panel retaining screws.
- 5. Using the ejector handles, disengage the board from the backplane and remove it from the system.

6.4. Installation of Peripheral Devices

The CP6006(X)-SA is designed to accommodate various peripheral devices, such as M.2 (SATA), PMC, XMC, and rear I/O devices.

Prior to installation of a peripheral device, ensure that the safety requirements are met. Special attention must be paid to avoid touching any components that may be hot, such as heat sink, etc.

Figure 10: Connecting a Peripheral Device to the CP6006X-SA

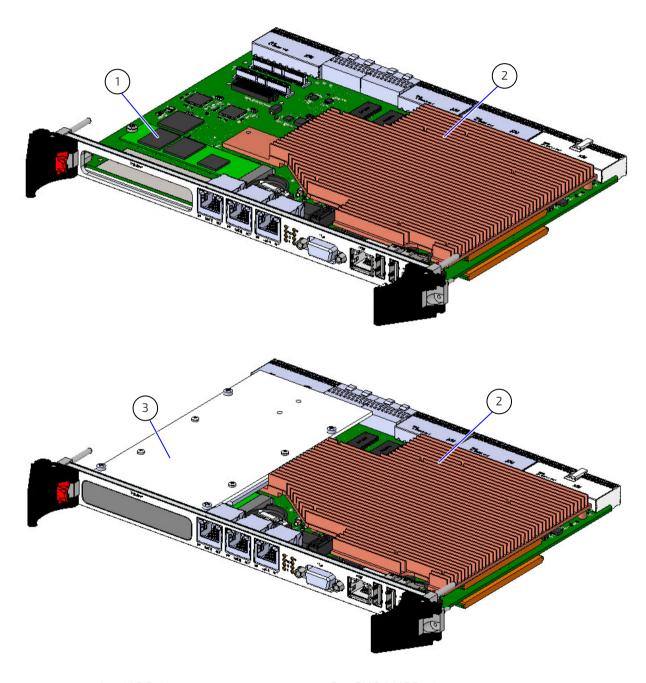

- 1. M.2 Device
- 2. Heat Sink

3. PMC/XMC Device

6.4.1. SATA M.2 Module Installation

A SATA Flash module may be connected to the CP6006(X)-SA via the onboard connector, J18. This optionally available module must be physically installed on the CP6006(X)-SA prior to installation of the CP6006(X)-SA in a system. During installation it is necessary to ensure that the SATA Flash module is properly seated in the onboard connector J18, i.e. the pins are aligned correctly and not bent.

- SATA device fail message at boot-up: may be a bad cable or lack of power going to the drive
- SATA device fail message at boot-up on Rear I/O module, caused by forced speed to 6.0Gb/s (see Chapter 2.7.6 "SATA Interfaces")

6.4.2. Installation of External SATA Devices

The following information pertains to external SATA devices which may be connected to the CP6006(X)-SA via normal cabling.

Some symptoms of incorrectly installed SATA devices are:

- Device on a SATA channel does not spin up: check power cables and cabling. May also result from a bad power supply or SATA device.
 - The SATA connector on the CP6006(X)-SA provides only a data connection. The power for this device must be supplied by a separate connector. For further information, refer to the respective documentation of the device.
- SATA device fail message at boot-up: may be a bad cable or lack of power going to the drive.

6.4.3. PMC Module Installation

The CP6006(X)-SA supports the installation of a PMC module via the J21 to J22 connectors. For information on the installation of the PMC module, refer to the documentation provided with the module.

6.4.4. XMC Module Installation

The CP6006(X)-SA supports the installation of an XMC module via the J20 connector. For information on the installation of the XMC module, refer to the documentation provided with the module.

6.4.5. Rear Transition Module Installation

For physical installation of rear transition modules, refer to the documentation provided with the module itself.

6.5. Battery Replacement

The CP6006(X)-SA RTC may be backed up using a single UL-approved CR2025, 3.0 V "coin cell" lithium battery from one of two possible points of installation:

- onboard
- on the rear transition module

Only one battery may be installed at a time. Refer to Table 1 for battery requirements.

6.5.1. Updating the IPMI Firmware

6.5.1.1. IPMI Rollback Mechanism

The CP6006(X)-SA's IPMI controller has an internal flash, where the boot block or the active IPMI firmware is running from, as well as an external flash, where two IPMI firmware images are stored, namely:

- a copy of the currently active image, and
- the previously good image or the newly downloaded image.

During firmware upgrade, the previously good image in the external flash is replaced by the newly downloaded image. Then the boot block activates the new image by copying it to the internal flash. If the newly downloaded image was successfully activated, its copy in the external flash is now the active image. The copy of the old active image becomes the previously good image.

Manual rollback is also possible via the **klpmi hpm rollback** uEFI Shell command.

6.5.1.2. Determining the Active IPMI Firmware Image

To determine the active IPMI firmware image, use the **klpmi info** command.

6.5.1.3. Updating Procedure

The active IPMI firmware image can be updated with the latest HPM.1 file using the klpmi hpm upgrade uEFI Shell command.

7/ uEFI BIOS (t.b.d.)

8/IPMI Firmware

8.1. Overview

The CP6006(X)-SA provides an IPMI controller (NXP® ARM7) with 512 kB of internal firmware flash as well as external firmware flash for firmware upgrade and rollback. The IPMI controller carries out IPMI commands such as monitoring several onboard temperature conditions, board voltages and the power supply status, and managing hot swap operations. The IPMI controller is accessible via two IPMBs, one host Keyboard Controller Style (KCS) interface and up to four Gigabit Ethernet interfaces (IOL).

The CP6006(X)-SA is fully compliant with the IPMI - Intelligent Platform Management Interface v2.0 and the PICMG 2.9 R1.0 specifications.

The following are key features of the CP6006(X)-SA's IPMI firmware:

- Keyboard Controller Style (KCS) interface
- Dual-port IPMB interface for out-of-band management and sensor monitoring
- ▶ IPMI over LAN (IOL) and Serial over LAN (SOL) support
- Sensor Device functionality with configurable thresholds for monitoring board voltages, CPU state, board reset, etc.
- FRU Inventory functionality
- System Event Log (SEL), Event Receiver functionalities
- Sensor Data Record Repository (SDRR) functionality
- ► IPMI Watchdog functionality (power-cycle, reset)
- Board monitoring and control extensions:
 - Graceful shutdown support
 - ▶ uEFI BIOS fail-over control: selection of the SPI boot flash (standard/recovery)
- Field-upgradeable IPMI firmware:
 - via the KCS. IPMB or IOL interfaces
 - Download of firmware does not break the currently running firmware or payload activities
- Two flash banks with rollback capability: manual rollback or automatic in case of upgrade failure

For general information on the Kontron IPMI Firmware, refer to the IPMI Firmware User Guide.

8.2. IPMI Firmware and KCS Interface Configuration

Initially the default configuration of the IPMI firmware (KCS interface) is:

- ► IRO = 11
- MODE = SMC
- ► IPMB = single-ported.

If this is the required configuration, no further action is required. If the configuration must be modified, the **kIpmi** uEFI Shell command is used to modify the configuration as required, e.g. "klpmi irq [0|11]", "klpmi mode [smc|bmc]", and "klpmi ipmb [single-ported|dual-ported]". For information on the **kIpmi** uEFI Shell command, refer to the uEFI BIOS Chapter.

The KCS interface serves for the communication between the CP6006(X)-SA's payload and the IPMI controller. The IPMI OS kernel s require the KCS interface configuration during their loading time. The KCS interface configuration is available in the "IPMI Device Information Record" included in the SMBIOS table.

8.3. Supported IPMI and ATCA Commands

8.3.1. Standard IPMI Commands

The following table shows an excerpt from the command list specified in the IPMI specification 2.0. The shaded table cells indicate commands not supported by the CP6006(X)-SA IPMI firmware.

M = mandatory, O = optional

Table 52: Standard IPMI Commands

COMMAND	IPMI 2.0 SPEC. SECTION	NETFN	CMD	KONTRON SUPPORT ON IPMI CONTROLLER
IPM DEVICE "GLOBAL" COMMANDS				M
Get Device ID	20.1	Арр	01h	M / Yes
Cold Reset	20.2	Арр	02h	0 / Yes
Warm Reset	20.3	Арр	03h	O / No
Get Self Test Results	20.4	Арр	04h	0 / Yes
Manufacturing Test On	20.5	Арр	05h	O / No
Set ACPI Power State	20.6	Арр	06h	0 / Yes
Get ACPI Power State	20.7	Арр	07h	0 / Yes
Get Device GUID	20.8	Арр	08h	O / No
Broadcast "Get Device ID"	20.9	Арр	01h	M / Yes
BMC WATCHDOG TIMER COMMANDS				0
Reset Watchdog Timer	27.5	Арр	22h	0 / Yes
Set Watchdog Timer	27.6	Арр	24h	0 / Yes
Get Watchdog Timer	27.7	Арр	25h	0 / Yes
BMC DEVICE AND MESSAGING COMMANDS				0
Set BMC Global Enables	22.1	Арр	2Eh	0 / Yes
Get BMC Global Enables	22.2	Арр	2Fh	0 / Yes
Clear Message Flags	22.3	Арр	30h	0 / Yes
Get Message Flags	22.4	Арр	31h	0 / Yes
Enable Message Channel Receive	22.5	Арр	32h	0 / Yes
Get Message	22.6	Арр	33h	0 / Yes
Send Message	22.7	Арр	34h	0 / Yes
Read Event Message Buffer	22.8	Арр	35h	0 / Yes
Get BT Interface Capabilities	22.9	Арр	36h	O / No
Get System GUID	22.14	Арр	37h	O / No
Get Channel Authentication Capabilities	22.13	Арр	38h	0 / Yes
Session Control	22.15 to 22.20	Арр	39h to 3Dh	0 / Yes
Get AuthCode	22.21	Арр	3Fh	O / No
Channel Commands	22.22 to 22.30	Арр	40h to 47h	0 / Yes
User Commands	24.1 to 24.9	Арр	48h to 4Fh	0 / Yes
Get Channel OEM Payload Info	24.10	Арр	50h	O / No
Master Write-Read	22.11	Арр	52h	0 / Yes
Get Channel Cipher Suits	22.15	Арр	54h	O / No

COMMAND	IPMI 2.0 SPEC. SECTION	NETFN	CMD	KONTRON SUPPORT ON IPMI CONTROLLER		
Suspend/Resume Payload Encryption	24.3	Арр	55h	0 / Yes		
Set Channel Security Keys	22.25	Арр	56h	O / No		
Get System Interface Capabilities	22.9	Арр	57h	O / No		
CHASSIS DEVICE COMMANDS				0		
Get Chassis Capabilities	28.1	Chassis	00h	0 / Yes		
Get Chassis Status	28.2	Chassis	01h	0 / Yes		
Chassis Control	28.3	Chassis	02h	0 / Yes		
Extended Chassis Control Commands	28.4 to 28.8	Chassis	03h, 04h, 0Ah, 05h, 06h	O / No		
Set Power Cycle Interval	28.9	Chassis	0Bh	0 / Yes		
Extended Chassis Control Commands	28.11 to 28.13	Chassis	07h to 09h	O / No		
Get POH Counter	28.14	Chassis	0Fh	0 / Yes		
EVENT COMMANDS				M		
Set Event Receiver	29.1	S/E	00h	M / Yes		
Get Event Receiver	29.2	S/E	01h	M / Yes		
Platform Event (a.k.a. "Event Message")	29.3	S/E	02h	M / Yes		
PEF AND ALERTING COMMANDS	30.1 to 30.8	S/E	10h to 17h	O / No		
SENSOR DEVICE COMMANDS				M		
Get Device SDR Info	35.2	S/E	20h	M / Yes		
Get Device SDR	35.3	S/E	21h	M / Yes		
Reserve Device SDR Repository	35.4	S/E	22h	M / Yes		
Get Sensor Reading Factors	35.5	S/E	23h	O / No		
Set Sensor Hysteresis	35.6	S/E	24h	0 / Yes		
Get Sensor Hysteresis	35.7	S/E	25h	0 / Yes		
Set Sensor Threshold	35.8	S/E	26h	0 / Yes		
Get Sensor Threshold	35.9	S/E	27h	0 / Yes		
Set Sensor Event Enable	35.10	S/E	28h	0 / Yes		
Get Sensor Event Enable	35.11	S/E	29h	0 / Yes		
Re-arm Sensor Events	35.12	S/E	2Ah	O / No		
Get Sensor Event Status	35.13	S/E	2Bh	O / No		
Get Sensor Reading	35.14	S/E	2Dh	M / Yes		
Set Sensor Type	35.15	S/E	2Eh	O / No		
Get Sensor Type	35.16	S/E	2Fh	O / No		
FRU DEVICE COMMANDS				M		
Get FRU Inventory Area Info	34.1	Storage	10h	M / Yes		
Read FRU Data	34.2	Storage	11h	M / Yes		
Write FRU Data	34.3	Storage	12h	M / Yes		
SDR DEVICE COMMANDS	DR DEVICE COMMANDS					
Get SDR Repository Info	33.9	Storage	20h	0 / Yes		
Get SDR Repository Allocation Info	33.10	Storage	21h	0 / Yes		

COMMAND	IPMI 2.0 SPEC. SECTION	NETFN	CMD	KONTRON SUPPORT ON IPMI CONTROLLER
Reserve SDR Repository	33.11	Storage	22h	0 / Yes
Get SDR	33.12	Storage	23h	0 / Yes
Add SDR	33.13	Storage	24h	0 / Yes
Partial Add SDR	33.14	Storage	25h	0 / Yes
Delete SDR	33.15	Storage	26h	0 / Yes
Clear SDR Repository	33.16	Storage	27h	0 / Yes
Get SDR Repository Time	33.17	Storage	28h	0 / No
Set SDR Repository Time	33.18	Storage	29h	0 / No
Enter SDR Repository Update Mode	33.19	Storage	2Ah	O / No
Exit SDR Repository Update Mode	33.20	Storage	2Bh	O / No
Run Initialization Agent	33.21	Storage	2Ch	0 / Yes
SEL DEVICE COMMANDS				0
Get SEL Info	40.2	Storage	40h	0 / Yes
Get SEL Allocation Info	40.3	Storage	41h	0 / Yes
Reserve SEL	40.4	Storage	42h	0 / Yes
Get SEL Entry	40.5	Storage	43h	0 / Yes
Add SEL Entry	40.6	Storage	44h	0 / Yes
Partial Add SEL Entry	40.7	Storage	45h	O / No
Delete SEL Entry	40.8	Storage	46h	0 / Yes
Clear SEL	40.9	Storage	47h	0 / Yes
Get SEL Time	40.10	Storage	48h	0 / Yes
Set SEL Time	40.11	Storage	49h	0 / Yes
Get Auxiliary Log Status	40.12	Storage	5Ah	O / No
Set Auxiliary Log Status	40.13	Storage	5Bh	O / No
LAN DEVICE COMMANDS				0
Set LAN Configuration Parameters	23.1	Transport	01h	0 / Yes
Get LAN Configuration Parameters	23.2	Transport	02h	0 / Yes
Suspend BMC ARPs	23.3	Transport	03h	O / No
Get IP/UDP/RMCP Statistics	23.4	Transport	04h	0 / Yes
SERIAL/MODEM DEVICE COMMANDS	25.1 to 25.12	Transport	10h to 1Bh	O / No
SOL COMMANDS				0
SOL Activating	26.1	Transport	20h	0 / Yes
Set SOL Configuration Parameters	26.2	Transport	21h	0 / Yes
Get SOL Configuration Parameters	26.3	Transport	22h	0 / Yes

NOTICE

Some of the above-mentioned commands, such as SDR device commands, work only if the IPMI controller is configured as BMC. For further information, refer to the IPMI specification 2.0.

8.3.2. AdvancedTCA and AMC Commands

The following table shows an excerpt from the command list specified in the PICMG 3.0 R 2.0 AdvancedTCA Base Specification and the PICMG AMC.0 Advanced Mezzanine Card Specification, R 1.0. The shaded table cells indicate commands not supported by the IPMI firmware.

M = mandatory

Table 53: Standard IPMI Commands

COMMAND	IPMI 2.0 SPEC. SECTION	NETFN	CMD	KONTRON SUPPORT ON IPMI CONTROLLER
AdvancedTCA				M
Get PICMG Properties	3-9	PICMG	00h	M / Yes
FRU Control	3-22	PICMG	04h	N/A
Get FRU LED Properties	3-29	PICMG	05h	M / Yes
Get LED Color Capabilities	3-25	PICMG	06h	M / Yes
Set FRU LED State	3-26	PICMG	07h	M / Yes
Get FRU LED State	3-27	PICMG	08h	M / Yes
Get Device Locator Record ID	3-29	PICMG	0Dh	M / Yes

8.4. Firmware Identification

8.4.1. Get Device ID Command

Table 54: Get Device ID Command

COMMAND			LUN	NetFn	CMD		
Get Device ID			00h	App = 06h	01h		
		REQUEST DATA	٩.				
Byte	Data Field	Data Field					
		RESPONSE DAT	·A				
Byte	Data Field						
1	Completion cod	е					
2	10h	Device ID					
3	80h	Device Revision					
4	02h	Firmware Revision 1: Major Fi (varies depending on firmwai		1			
5	00h	Firmware Revision 2: Minor F (varies depending on firmwai		n, BCD encoded			
6	51h	IPMI Version, holds IPMI com	mand specificati	on version, BCD en	coded		
7	BDh or BFh	Additional Device Support (SN	ИС or BMC mode)			
810	98h 3Ah 00h 03A98h = 15000	Manufacturer ID, LSB first) = Kontron					
1112	40h B4h B440h = Identif	Product ID, LSB first ies the board/family firmware					
13*	13* Release number of the IPMI firmware (varies depending on firmware revision): 10h for R10 11h for R11						
14*	Board Geographical Address/slot number: 1 = Board in chassis slot 1						
1516*	Reserved						

^{*} Bytes 13 through 16 are optional and defined by Kontron.

Invoking the IPMI command $\,\textbf{Get}\,\,\,\textbf{Device}\,\,\,\textbf{ID}\,\,\,\text{returns}$ among other information the following data:

- Manufacturer ID = 3A98h (Kontron IANA ID)
- Product ID = B440h, identifies the board family of the IPMI firmware
- Firmware revision (byte 4:5) reflects the version of the running firmware, which will change after firmware update.
- Release number of the IPMI firmware (byte 13) will be incremented with each firmware update

8.4.2. Device Locator Record

The device ID string which can be found by reading the Device Locator Record (SDR Type 12h) contains the string "BMC:x ... x". For example, invoking the "ipmitool" command **ipmitool sdr list mcloc** will return the device ID strings of all available boards. If the IPMI controller is in BMC mode, this string will be displayed without change. If the IPMI controller is in SMC mode, then the string will be changed into "Sxx: x ... x" where xx is the slot number where the board is residing, e.g. "509: x ... x".

8.5. Board Control Extensions

8.5.1. SPI Boot Flash Selection—uFFI BIOS Failover Control

The uEFI BIOS code is stored in two different SPI boot flash devices designated as the standard SPI boot flash and the recovery SPI boot flash.

By default, the uEFI BIOS code stored in the standard SPI boot flash is executed first. If this fails, the uEFI BIOS code in the recovery SPI boot flash is then executed.

During boot-up, the uEFI BIOS reports its operational status to the IPMI controller within a given time. If the status is "failed" or not reported within the given time, the IPMI controller selects the recovery SPI boot flash, resets the board's processor, and waits for the status report from the uEFI BIOS again.

In the event the recovery boot operation fails, the IPMI controller reports it, but takes no further action of its own.

When a boot operation fails, a "Boot Error - Invalid boot sector" event is asserted for the related sensor:

- FWHO Boot Err" sensor indicates the standard SPI boot flash has failed
- "FWH1 Boot Err" sensor indicates the recovery SPI boot flash has failed

8.5.2. uEFI BIOS Boot Order Selection

Normally the uEFI BIOS will apply the boot order which was selected in the uEFI BIOS menu "uEFI Boot/Boot Option Priorities". But there is another alternative boot order which is stored in the IPMI controller's non-volatile memory. This boot order can be set and read by IPMI OEM commands. At payload start the IPMI controller writes this boot order into a register where the uEFI BIOS can read it. If this IPMI controller's boot order has a non-zero value, the uEFI BIOS will use it instead of its own boot order.

8.5.3. Set Control State (SPI Boot Flash Selection, Boot Order Selection)

Table 55: Set Control State

COMMAND		LUN	NetFn	CMD	
Set Control Sta	ate (SPI Boot Flash, Boot Order)	00h	OEM = 3Eh	20h	
	REQUEST DATA	4			
Byte	e Data Field				
1	Control ID:				
	00h = SPI boot flash selection				
	9Dh = uEFI BIOS boot order configuration				
2	Control state for SPI boot flash selection (00h	1):			
	00h = Standard SPI boot flash is selected (defau	lt)			
	01h = Recovery SPI boot flash is selected				
	Note: The DIP switch SW1, switch 2, may over	write the above s	selection.		
	Control state for uEFI BIOS boot order configu	<mark>ration (9Dh):</mark>			
	00h = Boot order is according to uEFI BIOS setup	(default)			
	01h = Next boot device is: Floppy				
	02h = Next boot device is: HDD				
	03h = Next boot device is: CD				
	04h = Next boot device is: Network				
	05h = Next boot device is: USB Floppy				
	06h = Next boot device is: USB HDD				
07h = Next boot device is: USB CD-ROM					
	RESPONSE DAT	Ά			
Byte	Data Field				
1	Completion code				



The settings mentioned above are stored in EEPROM and applied (to logic) each time the IPMI controller detects power-on.

8.5.4. Get Control State (SPI Boot Flash Selection, Boot Order Selection)

This command is used to read out the SPI boot flash and boot order settings.

Table 56: Get Control State

COMMAND		LUN	NetFn	CMD	
Get Control St	ate (SPI Boot Flash, Boot Order)	00h	OEM = 3Eh	21h	
	REQUEST DATA	4			
Byte	Data Field				
1	Control ID:				
	00h = SPI boot flash selection				
	9Dh = uEFI BIOS boot order configuration				
	RESPONSE DAT	A			
Byte	Data Field				
1	Completion code				
4	Current control state				
	(see section "Set Control State")				
00h 01h for control ID = SPI boot flash selection					
	00h FFh for control ID = uEFI BIOS boot order co	onfiguration			

8.6. Sensors Implemented on the Board

The IPMI controller includes several sensors for voltage or temperature monitoring and various others for pass/fail type signal monitoring. Every sensor is associated with a Sensor Data Record (SDR). Sensor Data Records contain information about the sensor's identification such as sensor type, sensor name, and sensor unit. SDRs also contain the configuration of a specific sensor such as threshold, hysteresis or event generation capabilities that specify the sensor's behavior. Some fields of the sensor SDR are configurable using IPMI commands, others are always set to built-in default values.

The IPMI controller supports sensor device commands and uses the static sensor population feature of IPMI. All Sensor Data Records can be queried using Device SDR commands.

The sensor name (ID string) has a name prefix which is 'NNN:' in the lists below. When reading the sensor name after board insertion, this prefix becomes automatically adapted to the role (BMC or SMC) and the physical position (slot number) of the board in a rack. If the IPMI controller is set up as a BMC, the prefix will be 'BMC:' independent of the slot where it resides. If the IPMI controller is set up as an SMC, the prefix will be 'Sxx:' where xx is the slot number (e.g. 09).

The sensor number is the number which identifies the sensor e.g. when using the IPMI command **Get Sensor Reading**. Please note that "ipmitool" accepts sensor numbers in decimal (e.g. "10") or hexadecimal (e.g. "0xa") notation.

The IPMI tool "ipmitool" displays for the command "ipmitool sdr list" the contents of the sensor data record repository (SDRR) of the whole rack if the SDRR has been generated. The generation of the SDRR must always be redone after adding or removing a board from the rack. For further information, refer to the IPMI Firmware User Guide, section "IPMI Setup for the Rack".

8.6.1. Sensor List

The following table indicates all sensors available on the CP6006(X)-SA. For further information on Kontron's OEM-specific sensor types and sensor event type codes presented in the following table, refer to section "OEM Event/Reading Types".

Table 57: Sensor List

SENSOR NUMBER / ID STRING	SENSOR TYPE (CODE) / EVENT/READING TYPE (CODE)	Assertion Mask / Deassertion Mask/ Reading Mask	DESCRIPTION	LED I1 Active / Reading Mask
00h / NNN:Hot Swap	Hot Swap (F0h) / Sensor-specific (6Fh)	00FFh / 0000h / 00FFh	Hot swap sensor	N
01h / NNN:Temp CPU	Temperature (01h) / Threshold (01h)	1A81h / 7A81h / 3939h	CPU die temperature	Y / 0F3Ch
02h / NNN:Temp PCH	Temperature (01h) / Threshold (01h)	0A80h / 7A80h / 3838h	Chipset temperature	Y / 0F3Ch
03h / NNN:Temp Board	Temperature (01h) / Threshold (01h)	7A95h / 7A95h / 3F3Fh	Board temperature	Y / 0F3Ch
04h / NNN:Pwr Good	Power supply (08h) / OEM (73h)	0000h / 0000h / 009Fh	Status of all power lines	N
05h / NNN:Pwr Good Evt	Power supply (08h) / OEM (73h)	009Fh / 009Fh / 009Fh	Power fail events for all power lines	Y / 009Fh
06h / NNN:Board 3.3V	Voltage (02h) / Threshold (01h)	2204h / 2204h / 1212h	Board 3.3V supply	Y / 0F3Ch
07h / NNN:Board 5VIPMI	Voltage (02h) / Threshold (01h)	2204h / 2204h / 1212h	Management Power (MP) 5V	Y / 0F3Ch
08h / NNN:Board 5.0V	Voltage (02h) / Threshold (01h)	2204h / 2204h / 1212h	Board 5V supply	Y / 0F3Ch
09h / NNN:Board 12V	Voltage (02h) / Threshold (01h)	2204h / 2204h / 1212h	Board 12V supply	Y / 0F3Ch
OAh / NNN:IPMB 5V	Voltage (02h) / Threshold (01h)	2204h / 2204h / 1212h	IPMB 5V supply	N
0Bh / NNN:Fan1 Speed	Fan (04h) / Threshold (01h)	0000h / 0000h / 1B1Bh	Speed (rpm) Fan 1	N
0Ch / NNN:Fan2 Speed	Fan (04h) / Threshold (01h)	0000h / 0000h / 1B1Bh	Speed (rpm) Fan 2	N
0Dh / NNN:Last Reset	OEM (CFh) / "digital" Discrete (03h)	0002h / 0000h / 0003h	Board reset event	Y / 0002h
0Eh / NNN:Slot System	Entity presence (25h) / Sensor-specific (6Fh)	0000h / 0000h / 0003h	Board is in system slot (SYSEN)	N
OFh / NNN:PCI Present	Entity presence (25h) / Sensor-specific (6Fh)	0000h / 0000h / 0003h	Board is selected (BDSEL) and in system slot (SYSEN)	N
11h / NNN:IPMI WD	Watchdog2 (23h) / Sensor-specific (6Fh)	010Fh / 0000h / 010Fh	IPMI watchdog	Y / 010Fh
12h /	IPMB status change (F1h) /	000Fh / 0000h /	IPMB-0 state (refer to	N

SENSOR NUMBER / ID STRING	SENSOR TYPE (CODE) / EVENT/READING TYPE (CODE)	Assertion Mask / Deassertion Mask/ Reading Mask	DESCRIPTION	LED I1 Active / Reading Mask
NNN:IPMB State	Sensor-specific (6Fh)	000Fh	PICMG 3.0 Rev 2.0, 3.8.4.1)	
13h / NNN:ACPI State	System ACPI Power State (22h) / Sensor-specific (6Fh)	7FFFh / 0000h / 7FFFh	System ACPI power state	N
14h / NNN:Health Error	Platform Alert (24h) / "digital" Discrete (03h)	0000h / 0000h / 0003h	Aggregates states (power, temperatures etc.). Visualization by the Health LED (LED I1, red).	N
15h / NNN:CPU 0 Status	Processor (07h) / Sensor-specific (6Fh)	0463h / 0400h / 04E3h	CPU status: "Processor Throttled, THERMTRIP or CAT error"	Y / 0403h
16h / NNN:POST Value	POST value OEM (C6h) / Sensor-specific (6Fh)	4000h / 0000h / 40FFh	POST code value (port 80h)	N
17h / NNN:FWH0 BootErr	Boot error (1Eh) / Sensor-specific (6Fh)	0008h / 0008h / 0008h	Boot error on standard SPI boot flash	Y / 0008h
18h / NNN:FWH1 BootErr	Boot error (1Eh) / Sensor-specific (6Fh)	0008h / 0008h / 0008h	Boot error on recovery SPI boot flash	Y / 0008h
19h / NNN:XMC present	Entity Presence (25h) / Sensor-specific (6Fh)	0000h / 0000h / 0003h	Presence of XMC board	N
1Ah / NNN:FRU Agent	OEM FRU Agent (C5h) / Discrete (OAh)	0140h / 0000h / 0147h	FRU initialization agent state	Y / 0140h
1Bh / NNN:IPMC Storage	Management Subsystem Health (28h) / Sensor- specific (6Fh)	0002h / 0000h / 0003h	IPMI controller storage access error	Y / 0002h
1Ch / NNN:IPMC Reboot	Platform Alert (24h) / "digital" Discrete (03h)	0002h / 0000h / 0003h	2 = (Re-) Boot of IPMI controller	N
1Dh / NNN:IPMC FwUp	OEM FW Update (C7h) / Sensor-specific (6Fh)	010Fh / 0000h / 10Fh	IPMI FW update / manual rollback / automatic rollback	N
1Eh / NNN:Ver change	Firmware version changed (2Bh) / Sensor-specific (6Fh)	0002h / 0000h / 0002h	IPMI FW version, uEFI BIOS version, and logic version changed; update sensor data record repository	N
1Fh / NNN:SEL State	Event Logging Disabled (10h) / Sensor-specific (6Fh)	003Ch / 0000h / 003Ch	State of event logging	N
20h / NNN:IPMI Info-1	OEM Firmware Info 1 (C0h) / OEM (70h)	0003h / 0000h / 7FFFh	For internal use only	N
21h / NNN:IPMI Info-2	OEM Firmware Info 2 (C0h) / OEM (71h)	0003h / 0000h / 7FFFh	For internal use only	N

SENSOR NUMBER / ID STRING	SENSOR TYPE (CODE) / EVENT/READING TYPE (CODE)	Assertion Mask / Deassertion Mask/ Reading Mask	DESCRIPTION	LED I1 Active / Reading Mask
22h / NNN:IniAgent Err	Initialization Agent (C2h) / "digital" Discrete (03h)	0002h / 0000h / 0003h	Initialization agent error status. Used on BMC only. 1 = error free	Y / 0002h
23h / NNN:Board Rev	OEM Board Revision (CEh)/ Sensor-specific (6Fh)	0000h / 0000h / 7FFFh	Board revision information	N
24h / NNN:Link-GbE-A	LAN (27h) / Sensor-specific (6Fh)	0000h / 0000h / 0003h	LAN link status of the front GbE A	N
25h / NNN:Link-GbE-B	LAN (27h) / Sensor-specific (6Fh)	0000h / 0000h / 0003h	LAN link status of the front GbE B	N
28h / NNN:Link-LPa	LAN (27h) / Sensor-specific (6Fh)	0000h / 0000h / 0003h	LAN link status of the rear I/O port PICMG 2.16 LPa	N
29h / NNN:Link-LPb	LAN (27h) / Sensor-specific (6Fh)	0000h / 0000h / 0003h	LAN link status of the rear I/O port PICMG 2.16 LPb	N
*2Ch / NNN:Link-10GBE1	LAN (27h)/ Sensor-specific (6Fh)	0000h / 0000h / 0003h	Link status of the 10 GbE interface on rear I/O port 1 (10GBE1, Intel® XEON-D)	N
*2Dh / NNN:Link-10GBE2	LAN (27h)/ Sensor-specific (6Fh)	0000h / 0000h / 0003h	Link status of the 10 GbE interface on rear I/O port 2 (10GBE2, Intel® XEON-D)	N

 $^{^{\}ast}\,$ The "Link-10GBE1" and "Link-10GBE2" sensors are only present on the CP6006X-SA.

8.7. Sensor Thresholds

Table 58: Thresholds - Standard and Extended Temperature Range

Sensor Number / ID String	01h / NNN:Temp CPU	02h / NNN:Temp PCH	03h / NNN:Temp Board (0°C to +60°C)	03h / NNN:Temp Board (-40°C to +70°C)
Upper non-recoverable	114 °C	114 °C	85 °C	95 °C
Upper critical	104 °C	104 °C	80 °C	90 °C
Upper non-critical	94 °C	94 °C	70 °C	80 °C
Normal max.	85 °C	85 °C	65 °C	75 °C
Nominal	75 °C	75 °C	55 °C	65 °C
Normal min.	3 °C	3 °C	0 °C	0 °C
Lower non-critical	1°C	n.a.	- 1 °C	- 40 °C
Lower critical	n.a.	n.a.	- 2 °C	- 42 °C
Lower non-recoverable	n.a.	n.a.	- 5 °C	- 45 °C

Table 59: Voltage Sensor Thresholds

Sensor Number / ID String	06h / NNN:Board 3.3V	07h / NNN:Board 5VIPMI	08h / NNN:Board 5.0V	09h / NNN:Board 12V	OAh / NNN:IPMB 5V
Upper non-recoverable	n.a.	n.a.	n.a.	n.a.	n.a.
Upper critical	3.50 V	5.29 V	5.29 V	12.9 V	5.29 V
Upper non-critical	n.a.	n.a.	n.a.	n.a.	n.a.
Normal max.	3.47 V	5.25 V	5.25 V	12.7 V	5.25 V
Nominal	3.30 V	5.00 V	5.00 V	12.0 V	5.0 V
Normal min.	3.14 V	4.51 V	4.75 V	11.5 V	4.75 V
Lower non-critical	n.a.	n.a.	n.a.	n.a.	n.a.
Lower critical	3.11 V	4.47 V	4.71 V	11.3 V	4.71 V
Lower non-recoverable	n.a.	n.a.	n.a.	n.a.	n.a.

8.8. OEM Event/Reading Types

OEM (Kontron) specific sensor types and codes are presented in the following table.

Table 60: OEM Event/Reading Types

OEM SENSOR TYPE (CODE)	OEM EVENT/ READING TYPE (CODE)	DESCRIPTION	
Firmware Info 1 (C0h)	70h	Internal Diagnostic Data	
Firmware Info 2 (C0h)	71h	Internal Diagnostic Data	
Initialization Agent (C2h)	03h ("digital" Discrete)	Offsets / events: 0: Initialization O.K. 1: Initialization Error	
FRU Agent (C5h)	OAh (Discrete)	FRU initialization agent, using a standard reading type.	
Post Value (C6h)	6Fh (sensor type specific)	Error is detected if the POST code is != 0 and doesn't change for a defined amount of time. In case of no error: Bits [7:0] = POST code (payload Port 80h) In case of error: Bits [15:0] = 4000h Data2 = POST code, low nibble Data3 = POST code, high nibble	
Firmware Upgrade Manager (C7h)	6Fh (sensor type specific)	Offsets / events: 0: First Boot after upgrade 1: First Boot after rollback (error) 2: First Boot after errors (watchdog) 3: First Boot after manual rollback 47: Reserved 8: Firmware Watchdog Bite, reset occurred	
Board Reset (CFh)	03h ("digital" Discrete)	Data 2 contains the reset type:WARM = 0COLD = 1FORCED_COLD = 2SOFT_RESET = 3MAX = 4 Data 3 contains the reset source:IPMI_WATCHDOG = 0IPMI_COMMAND = 1PROC_INT_CHECKSTOP = 2PROC_INT_RST = 3RESET_BUTTON = 4POWER_UP = 5LEG_INITIAL_WATCHDOG = 6LEG_PROG_WATCHDOG = 7SOFTWARE_INITIATED = 8SETUP_RESET = 9UNKNOWN = 0xFF	

OEM SENSOR TYPE (CODE)	OEM EVENT/ READING TYPE (CODE)	DESCRIPTION	
e.g. for Power Good /	73h	Sensor-specific Offset	Event
Power Good Event		0h	HS fault#
		1h	HS early fault#
		2h	DEG#
		3h	FAL#
		4h	BDSELState
		5h6h	n.a.
		7h	vccMainGood
		8hEh	n.a.
Board revision (CEh)	6Fh	Bits [7:0] = Board Revision number	
	(sensor type specific)		

8.9. IPMI Firmware Code

8.9.1. Firmware Upgrade

The IPMI's operational code can be upgraded via the open-source tool "ipmitool" or via uEFI BIOS commands. The upgrade tool/commands allow download and activation of new operational code and also rollback to the "last known good" operational code. For further information on the IPMI firmware upgrade, refer to the uEFI BIOS Chapter in this manual and the IPMI Firmware User Guide.

8.9.2. IPMI Firmware and FRU Data Write Protection

If the board is plugged in a write-protected CompactPCI slot, neither the IPMI firmware or the FRU data can be updated or reprogrammed. The IPMI firmware stores the write protect state in it's local NV-RAM.



The write protection mode is still active when the payload is off even if the IPMI firmware reboots. To disable the write protection mode, plug the board in a non-write-protected CompactPCI slot and switch on the payload.

8.10. LAN Functions

Four Gigabit Ethernet channels on the board support IPMI over LAN (IOL) and Serial over LAN (SOL). While IOL serves to transport IPMI commands and their responses via Gigabit Ethernet, SOL serves to transport any serial data via Gigabit Ethernet.

Please note that IOL and SOL need the Ethernet device to be powered. Therefore, the board (payload) must be fully powered.

For information on the assignment of the IOL/SOL channels, refer to the "Gigabit Ethernet" section in the "Functional Description" chapter.

Appendix A: List of Acronyms

Table 61: List of Acronyms

	I
ACPI	Advanced Configuration Power Interface
API	Application Programming Interface
Basic Module	COM Express® 125 x 95 Module form factor
BIOS	Basic Input Output System
вмс	Base Management Controller
BSP	Board Support Package
CAN	Controller-area network
Carrier Board	Application specific circuit board that accepts a COM Express ® module
сом	Computer-on-Module
Compact Module	COM Express® 95x95 Module form factor
CNTG	Computer Network Transaction Group
DDC	Display Data Control
DDI	Digital Display Interface –
DIMM	Dual In-line Memory Module
Display Port	DisplayPort (digital display interface standard)
DMA	Direct Memory Access
DRAM	Dynamic Random Access Memory
DVI	Digital Visual Interface
EAPI	Embedded Application Programming Interface
ECC	Error Checking and Correction
EEPROM	Electrically Erasable Programmable Read-Only Memory
eDP	Embedded Display Port
EMC	Electromagnetic Compatibility (EMC)
ESD	Electro Sensitive Device
Extended	COM Express® 155mm x 110mm Module
Module	form factor.
FIFO FRU	First In First Out
Gb	Field Replaceable Unit
GBE	Gigabit Gigabit Ethernet
GPI	General Purpose Input
GPIO	General Purpose Input Output
GPO	General Purpose Output
GPU	Graphics Processing Unit
HBR2	High Bitrate 2
110112	ווקוו טונו מנפ ב

HDA	High Definition Audio (HD Audio)
HD/HDD	Hard Disk /Drive
HDMI	High Definition Multimedia Interface
НРМ	PICMG Hardware Platform Management specification family
I2C	Inter integrated Circuit Communications
IOL	IPMI-Over-LAN
IOT	Internet of Things
IPMI	Intelligent Platform Management Interface
KCS	Keyboard Controller Style
KVM	Keyboard Video Mouse
LAN	Local Area Network
LPC	Low Pin-Count Interface:
LVDS	Low Voltage Differential Signaling –
M.A.R.S.	Mobile Application for Rechargeable Systems
MEI	Management Engine Interface
Mini Module	COM Express® 84x55mm Module form factor
MTBF	Mean Time Before Failure
NA	Not Available
NC	Not Connected
NCSI	Network Communications Services Interface
PATA	Parallel AT Attachment
PCI	Peripheral Component Interface
PCle	PCI-Express
PCN	Product Change Notification
PECI	Platform Environment Control Interface
PEG	PCI Express Graphics
PICMG®	PCI Industrial Computer Manufacturers Group
PHY	Ethernet controller physical layer device
Pin-out Type	COM Express® definitions for signals on COM Express® Module connector pins.
PS2	Personal System 2 (keyboard & mouse)
PSU	Power Supply Unit
RoHS	Restriction of Hazardous Substances
RTC	Real Time Clock
SAS	Serial Attached SCSI – high speed serial

	version of SCSI
SATA	Serial AT Attachment:
SCSI	Small Computer System Interface
SEL	System Event Log
ShMC	Shelf Management Controller
SMBus	System Management Bus
SO-DIMM	Small Outline Dual in-line Memory Module
SOIC	Small Outline Integrated Circuit
SOL	Serial Over LAN
SPI	Serial Peripheral Interface
SSH	Secure Shell
TPM	Trusted Platform Module
UART	Universal Asynchronous Receiver Transmitter
UEFI	Unified Extensible Firmware Interface
UHD	Ultra High Definition
USB	Universal Serial Bus
VGA	Video Graphics Adapter
VLP	Very Low Profile
WDT	Watch Dog Timer
WEEE	Waste Electrical and Electronic Equipment (directive)



About Kontron

Kontron is a global leader in embedded computing technology (ECT). As a part of technology group S&T, Kontron offers a combined portfolio of secure hardware, middleware and services for Internet of Things (IoT) and Industry 4.0 applications. With its standard products and tailor-made solutions based on highly reliable state-of-the-art embedded technologies, Kontron provides secure and innovative applications for a variety of industries. As a result, customers benefit from accelerated time-to-market, reduced total cost of ownership, product longevity and the best fully integrated applications overall. Kontron is a listed company. Its shares are traded in the Prime Standard segment of the Frankfurt Stock Exchange and on other exchanges under the symbol "KBC". For more information, please visit: www.kontron.com



GLOBAL HEADQUARTERS

KONTRON S&T

Lise-Meitner-Str. 3-5 86156 Augsburg Germany Tel.: + 49 821 4086-0 Fax: + 49 821 4086-111 info@kontron.com