

VME 7U


FEATURES

- EMC integrated system in 19" rack mount
- Card depth 160mm for 6U cards
- Ventilation vertical
- Integrated LED for output voltages
- 9 - 21 slot backplane
- Power supplies 450W or 650 W
- On / off-switch on the front
- Power supply on the rear
- Two front handles
- Two or three fans in a pluggable 1U cassette (front side)
- VME Monolithic Classic 6U, max. 5 slots in 6U 160mm and 16 slots in 3U I/O sockets possible (option 6)
- VME J1 Classic without I/O sockets (option o)



Dimension: Height: 7 U
 Width: 84 HP
 Depth: 371 mm

ORDERCODE-INSERT APPROPRIATE DIGIT

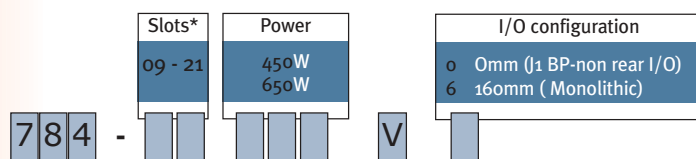

* Please check the availability of preferred parts on our homepage

AVAILABLE SLOTS

VME MONOLITHIC		30510-2XX-0000									
No. of slot		9	10	12	14	15	16	18	20	21	


VME J1		50510-2XX-0000									
No. of slot		9	10	12	14	15	16	18	20	21	

Subject to technical change.


MECHANICAL DESIGN

SPECIFICATIONS

FRONT VIEW

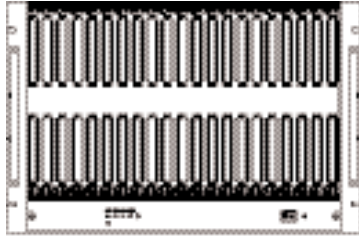

SIDE VIEW (AIR FLOW)



REAR VIEW



FAN

- Mode	permanent
- Dimension	119 x 119 x 32mm
- Nominal voltage	12 V
- Input power	5,76 W
- Air flow, free air	169,8 m ³ /h
- Noise	44 dB

POWER SUPPLY 450W

- Output power	450 W
- Output Voltages	5V/60A; 12V/5A; -12/2A
- Input voltage	100-240 VAC
- Frequency	50 - 60 Hz
- RFI, EMI	EN55022 Class B (conducted)
- Approvals	UL, CSA, EN, CE EN61000-3-2 (PFC)

POWER SUPPLY 650W

- Output power	650 W
- Output Voltages	5V/100A; 12V/6A; -12/4A
- Input voltage	100-240 VAC
- Frequency	50 - 60 Hz
- RFI, EMI	EN55022 Class B (conducted)
- Approvals	UL, CSA, EN, CE EN61000-3-2 (PFC)

SCOPE OF SUPPLY

High quality 19" rackmount chassis platform consisting of chromated aluminium enclosures, high performance J1 or Monolithic VME backplane, power supply, cooling system and AC/DC power components. Assembled, wired and tested prior to shipment.

Please note: custom configurations possible.