

# mITX-DNV

Doc. User Guide, Rev. 1.3

Doc. ID: [To be Determined]

This page has been intentionally left blank

# MITX-DNV - USER GUIDE

### Disclaimer

Kontron would like to point out that the information contained in this user guide may be subject to alteration, particularly as a result of the constant upgrading of Kontron products. This document does not entail any guarantee on the part of Kontron with respect to technical processes described in the user guide or any product characteristics set out in the user guide. Kontron assumes no responsibility or liability for the use of the described product(s), conveys no license or title under any patent, copyright or mask work rights to these products and makes no representations or warranties that these products are free from patent, copyright or mask work right infringement unless otherwise specified. Applications that are described in this user guide are for illustration purposes only. Kontron makes no representation or warranty that such application will be suitable for the specified use without further testing or modification. Kontron expressly informs the user that this user guide only contains a general description of processes and instructions which may not be applicable in every individual case. In cases of doubt, please contact Kontron.

This user guide is protected by copyright. All rights are reserved by Kontron. No part of this document may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language or computer language, in any form or by any means (electronic, mechanical, photocopying, recording, or otherwise), without the express written permission of Kontron. Kontron points out that the information contained in this user guide is constantly being updated in line with the technical alterations and improvements made by Kontron to the products and thus this user guide only reflects the technical status of the products by Kontron at the time of publishing.

Brand and product names are trademarks or registered trademarks of their respective owners.

©2019 by Kontron AG

Kontron AG

Lise-Meitner-Str. 3-5 86156 Augsburg Germany www.kontron.com

# High Risk Applications Hazard Notice

THIS DEVICE AND ASSOCIATED SOFTWARE ARE NOT DESIGNED, MANUFACTURED OR INTENDED FOR USE OR RESALE FOR THE OPERATION OF NUCLEAR FACILITIES, THE NAVIGATION, CONTROL OR COMMUNICATION SYSTEMS FOR AIRCRAFT OR OTHER TRANSPORTATION, AIR TRAFFIC CONTROL, LIFE SUPPORT OR LIFE SUSTAINING APPLICATIONS, WEAPONS SYSTEMS, OR ANY OTHER APPLICATION IN A HAZARDOUS ENVIRONMENT, OR REQUIRING FAIL-SAFE PERFORMANCE, OR IN WHICH THE FAILURE OF PRODUCTS COULD LEAD DIRECTLY TO DEATH, PERSONAL INJURY, OR SEVERE PHYSICAL OR ENVIRONMENTAL DAMAGE (COLLECTIVELY, "HIGH RISK APPLICATIONS").

You understand and agree that your use of Kontron devices as a component in High Risk Applications is entirely at your risk. To minimize the risks associated with your products and applications, you should provide adequate design and operating safeguards. You are solely responsible for compliance with all legal, regulatory, safety, and security related requirements concerning your products. You are responsible to ensure that your systems (and any Kontron hardware or software components incorporated in your systems) meet all applicable requirements. Unless otherwise stated in the product documentation, the Kontron device is not provided with error-tolerance capabilities and cannot therefore be deemed as being engineered, manufactured or setup to be compliant for implementation or for resale as device in High Risk Applications. All application and safety related information in this document (including application descriptions, suggested safety measures, suggested Kontron products, and other materials) is provided for reference only.

# **Revision History**

Revision	Brief Description of Changes	Date of Issue
1.0	Initial Issue	2018-Mar-16
1.1	Add extended temperature spec	2018-Oct-31
1.2	Modify M.2 Key B type	2018-Nov-15
1.3	Update OS support	2019-Mar-26

### **Terms and Conditions**

Kontron warrants products in accordance with defined regional warranty periods. For more information about warranty compliance and conformity, and the warranty period in your region, visit <a href="http://www.kontron.com/terms-and-conditions">http://www.kontron.com/terms-and-conditions</a>.

Kontron sells products worldwide and declares regional General Terms & Conditions of Sale, and Purchase Order Terms & Conditions. Visit <a href="http://www.kontron.com/terms-and-conditions">http://www.kontron.com/terms-and-conditions</a>.

For contact information, refer to the corporate offices contact information on the last page of this user guide or visit our website CONTACT US.

# **Customer Support**

Find Kontron contacts by visiting: <a href="http://www.kontron.com/support">http://www.kontron.com/support</a>.

### **Customer Service**

As a trusted technology innovator and global solutions provider, Kontron extends its embedded market strengths into a services portfolio allowing companies to break the barriers of traditional product lifecycles. Proven product expertise coupled with collaborative and highly-experienced support enables Kontron to provide exceptional peace of mind to build and maintain successful products.

For more details on Kontron's service offerings such as: enhanced repair services, extended warranty, Kontron training academy, and more visit <a href="http://www.kontron.com/support-and-services/services">http://www.kontron.com/support-and-services/services</a>.

### **Customer Comments**

If you have any difficulties using this user guide, discover an error, or just want to provide some feedback, contact Kontron support. Detail any errors you find. We will correct the errors or problems as soon as possible and post the revised user guide on our website.

# **Symbols**

The following symbols may be used in this user guide

### **ADANGER**

DANGER indicates a hazardous situation which, if not avoided, will result in death or serious injury.

### **▲**WARNING

WARNING indicates a hazardous situation which, if not avoided, could result in death or serious injury.

### NOTICE

NOTICE indicates a property damage message.

### **A**CAUTION

CAUTION indicates a hazardous situation which, if not avoided, may result in minor or moderate injury.



#### Electric Shock!

This symbol and title warn of hazards due to electrical shocks (> 60 V) when touching products or parts of products. Failure to observe the precautions indicated and/or prescribed by the law may endanger your life/health and/or result in damage to your material.



#### **ESD Sensitive Device!**

This symbol and title inform that the electronic boards and their components are sensitive to static electricity. Care must therefore be taken during all handling operations and inspections of this product in order to ensure product integrity at all times.



#### **HOT Surface!**

Do NOT touch! Allow to cool before servicing.



#### Laser!

This symbol inform of the risk of exposure to laser beam and light emitting devices (LEDs) from an electrical device. Eye protection per manufacturer notice shall review before servicing.



This symbol indicates general information about the product and the user guide.

This symbol also indicates detail information about the specific product configuration.



This symbol precedes helpful hints and tips for daily use.

# For Your Safety

Your new Kontron product was developed and tested carefully to provide all features necessary to ensure its compliance with electrical safety requirements. It was also designed for a long fault-free life. However, the life expectancy of your product can be drastically reduced by improper treatment during unpacking and installation. Therefore, in the interest of your own safety and of the correct operation of your new Kontron product, you are requested to conform with the following guidelines.

### **High Voltage Safety Instructions**

As a precaution and in case of danger, the power connector must be easily accessible. The power connector is the product's main disconnect device.

### **A**CAUTION

#### Warning

All operations on this product must be carried out by sufficiently skilled personnel only.

### **ACAUTION**

#### Electric Shock!



Before installing a non hot-swappable Kontron product into a system always ensure that your mains power is switched off. This also applies to the installation of piggybacks. Serious electrical shock hazards can exist during all installation, repair, and maintenance operations on this product. Therefore, always unplug the power cable and any other cables which provide external voltages before performing any work on this product.

Earth ground connection to vehicle's chassis or a central grounding point shall remain connected. The earth ground cable shall be the last cable to be disconnected or the first cable to be connected when performing installation or removal procedures on this product.

### Special Handling and Unpacking Instruction

#### NOTICE

#### **ESD Sensitive Device!**



Electronic boards and their components are sensitive to static electricity. Therefore, care must be taken during all handling operations and inspections of this product, in order to ensure product integrity at all times.

Do not handle this product out of its protective enclosure while it is not used for operational purposes unless it is otherwise protected.

Whenever possible, unpack or pack this product only at EOS/ESD safe work stations. Where a safe work station is not guaranteed, it is important for the user to be electrically discharged before touching the product with his/her hands or tools. This is most easily done by touching a metal part of your system housing.

It is particularly important to observe standard anti-static precautions when changing piggybacks, ROM devices, jumper settings etc. If the product contains batteries for RTC or memory backup, ensure that the product is not placed on conductive surfaces, including anti-static plastics or sponges. They can cause short circuits and damage the batteries or conductive circuits on the product.

### **Lithium Battery Precautions**

If your product is equipped with a lithium battery, take the following precautions when replacing the battery.

### **ACAUTION**

#### Danger of explosion if the battery is replaced incorrectly.

- Replace only with same or equivalent battery type recommended by the manufacturer.
- Dispose of used batteries according to the manufacturer's instructions.

## General Instructions on Usage

In order to maintain Kontron's product warranty, this product must not be altered or modified in any way. Changes or modifications to the product, that are not explicitly approved by Kontron and described in this user guide or received from Kontron Support as a special handling instruction, will void your warranty.

This product should only be installed in or connected to systems that fulfill all necessary technical and specific environmental requirements. This also applies to the operational temperature range of the specific board version that must not be exceeded. If batteries are present, their temperature restrictions must be taken into account.

In performing all necessary installation and application operations, only follow the instructions supplied by the present user guide.

Keep all the original packaging material for future storage or warranty shipments. If it is necessary to store or ship the product then re-pack it in the same manner as it was delivered.

Special care is necessary when handling or unpacking the product. See Special Handling and Unpacking Instruction.

# Quality and Environmental Management

Kontron aims to deliver reliable high-end products designed and built for quality, and aims to complying with environmental laws, regulations, and other environmentally oriented requirements. For more information regarding Kontron's quality and environmental responsibilities, visit <a href="http://www.kontron.com/about-kontron/corporate-responsibility/quality-management">http://www.kontron.com/about-kontron/corporate-responsibility/quality-management</a>.

### Disposal and Recycling

Kontron's products are manufactured to satisfy environmental protection requirements where possible. Many of the components used are capable of being recycled. Final disposal of this product after its service life must be accomplished in accordance with applicable country, state, or local laws or regulations.

### **WEEE Compliance**

The Waste Electrical and Electronic Equipment (WEEE) Directive aims to:

- Reduce waste arising from electrical and electronic equipment (EEE)
- Make producers of EEE responsible for the environmental impact of their products, especially when the product become waste
- Encourage separate collection and subsequent treatment, reuse, recovery, recycling and sound environmental disposal of EEE
- Improve the environmental performance of all those involved during the lifecycle of EEE



Environmental protection is a high priority with Kontron.

Kontron follows the WEEE directive

You are encouraged to return our products for proper disposal.

# Table of Contents

Symbols	6
For Your Safety	7
High Voltage Safety Instructions	7
Special Handling and Unpacking Instruction	7
Lithium Battery Precautions	8
General Instructions on Usage	8
Quality and Environmental Management	8
Disposal and Recycling	8
WEEE Compliance	8
Table of Contents	9
List of Tables	10
List of Figures	11
1/ Introduction	13
2/ Installation Procedures	14
2.1. Installing the Board	14
2.2. Chassis Safety Standards	15
2.3. Lithium Battery Replacement	15
3/ System Specifications	17
3.1. System Block Diagram	17
3.2. Component Main Data	18
3.3. Environmental Conditions	19
3.4. Standards and Certifications	19
3.5. Processor Support	19
3.6. System Memory Support	20
3.6.1. Memory Operating Frequencies	20
3.7. On-board Graphics Subsystem	20
3.8. Power Supply	21
4/ Connector Locations	22
4.1. Top Side	22
4.2. Connector Panel Side	24
5/ Connector Definitions	25
6/ I/O-Area Connectors	26
6.1. VGA Connector (CN24)	26
6.2. Ethernet Connectors (CN18, CN19 & CN20)	27
6.3. USB Connectors (I/O Area)	28
6.4. RS232/422/485 COM1 Connector (CN26)	30
7/ Internal Connectors	31
7.1. Power Input Wafer (ATX1)	31
7.2. CPU / System Fan Wafer (FAN1 & FAN2)	33
7.3. SATA (Serial ATA) Port 1 ~ Port 6 Connector (SATA1 ~ SATA6)	34
7.4. USB Connectors (Internal) (CN17)	35
7.5. Front Panel Pin Header (FP1 & FP2)	36
7.6. Serial COM2 Ports (CN16)	38
7.7. Digital Input / Output Wafer (CN15)	40
7.8. PS/2 Keyboard and Mouse Wafer (CN21)	
7.9. M.2 Key-B SSD Slot (M2B1)	

7.10. mPCle / mSATA Socket (MPCIE1)	45
7.11. SIM Interface Wafer for MPCIE1 (CN4)	
7.12. PCIE x8 Socket (PCIE1)	
7.13. GbE LAN LED Header (CN2)	
7.14. Wireless Activity LED Header for MPCIE1 (CN5)	
7.15. General Purpose LED Wafer (CN25)	
7.16. Switches and Jumpers	
7.16.1. mPCIe / mSATA Selection for MPCIE1 (JP1)	
7.16.2. USB Power Selection (JP2)	
7.16.3. AT / ATX Power Mode Selection (JP3)	
7.16.4. MFG Mode Selection (JP5)	
7.16.5. Clear CMOS Selection (JP10)	54
7.16.6. Flash Security Override Selection (JP11)	55
7.16.7. Power Output Selection for COM1 Pin-9 (JP15)	55
8/ On-Board Connectors & Mating Connector Types	57
9/ BIOS	
9.1. Starting the uEFI BIOS	
9.2. Setup Menus	
9.2.1. Main Setup Menu	
9.2.2. Advanced Setup Menu	
·	
9.2.3. Power Setup Menu	
9.2.4. Boot Setup Menu	
9.2.5. Security Setup Menu	
9.2.5.1. Remember the password	
9.2.6. Save & Exit Setup Menu	83
Appendix A: List of Acronyms	84
About Kontron	85
List of Tables	
LIST OF TAULES	
Table 1: Component Main Data	18
Table 2: Environmental Conditions	
Table 3: Standards and Certifications	
Table 4: Processor Support	
Table 5: Memory Operating Frequencies	
Table 6: Display Configuration	
Table 7: Supply Voltages	
Table 8: Jumper List Table 9: Top Side Internal Connector Pin Assignment	
Table 10: Connector Panel Side Connector List	
Table 11: Pin Assignment VGA Connector CN24	
Table 12: Pin Assignment Ethernet Connectors CN18, CN19, CN20	
Table 13: Pin Assignment USB3.0 / USB2.0 Connector CN22, CN23	
Table 14: Signal Description	
Table 15: Pin Assignment RS232/422/485 COM1 Connector CN26	30
Table 16: Signal Description	
Table 17: Pin Assignment ATX1	
Table 18: Signal Description	
Table 19: 4-Pin Mode FAN1, FAN2	
Table 20: 3-Pin Mode FAN1, FAN2	
Table 21: Signal description Table 22: Pin Assignment SATA1 ~ SATA6	
TADIC ELL TITLETIL TUTLL TUTLL TUTLL TUTLL TUTLL	

Table 23: Signal Description	34
Table 24: Pin Assignment CN5	35
Table 25: Signal Description	35
Table 26: Pin Assignment FP1	36
Table 27: Signal Description	36
Table 28: Pin Assignment FP2	36
Table 29: Signal Description	
Table 30: Pin Assignment CN16	38
Table 31: Signal Description	38
Table 32: Pin Assignment CN15	
Table 33: Pin Assignment CN21	
Table 34: Signal Description	
Table 35: Pin Assignment CON1	
Table 36: Pin Assignment MPCIE1	
Table 37: Pin Assignment CN4	
Table 38: Pin Assignment PCIE1	
Table 39: Pin Assignment CN2	
Table 40: Pin Assignment CN5	
Table 41: Pin Assignment CN25	
Table 42: Pin Assignment JP1	53
Table 43: Pin Assignment JP2	
Table 44: Pin Assignment JP3	
Table 45: Pin Assignment JP5	
Table 46: Pin Assignment JP10	
Table 47: Pin Assignment JP11	
Table 48: Pin Assignment JP15	
Table 49: On-Board Connectors & Mating Connector Types	
Table 50: Font Size Table	
Table 51: Main Setup Menu Sub-Screens and Functions	59
Table 52: List of Acronyms	84
Table 52: List of Acronyms	84
	84
List of Figures	84
List of Figures	17
List of Figures Figure 1: System Block Diagram mITX-DNV	17 22
List of Figures  Figure 1: System Block Diagram mITX-DNV	
List of Figures  Figure 1: System Block Diagram mITX-DNV	
List of Figures  Figure 1: System Block Diagram mITX-DNV	22 24 26
List of Figures  Figure 1: System Block Diagram mITX-DNV	22 24 26 27
List of Figures  Figure 1: System Block Diagram mITX-DNV	
List of Figures  Figure 1: System Block Diagram mITX-DNV	
List of Figures  Figure 1: System Block Diagram mITX-DNV	
List of Figures  Figure 1: System Block Diagram mITX-DNV	
List of Figures  Figure 1: System Block Diagram mITX-DNV	
List of Figures  Figure 1: System Block Diagram mITX-DNV	
List of Figures  Figure 1: System Block Diagram mITX-DNV	
List of Figures  Figure 1: System Block Diagram mITX-DNV	
List of Figures  Figure 1: System Block Diagram mITX-DNV	
List of Figures  Figure 1: System Block Diagram mITX-DNV	
List of Figures  Figure 1: System Block Diagram mITX-DNV	
List of Figures  Figure 1: System Block Diagram mITX-DNV	
List of Figures  Figure 1: System Block Diagram mITX-DNV	
List of Figures  Figure 1: System Block Diagram mITX-DNV	
List of Figures  Figure 1: System Block Diagram mITX-DNV	

Figure 24: Wireless Activity LED Header CN5	51
Figure 25: General Purpose LED Wafer CN25	51
Figure 26: Programming example 1	
Figure 27: Programming example 2	52
Figure 28: Jumper Connector	
Figure 29: mPCIe / mSATA Selection JP1	
Figure 30: USB Power Selection JP2	
Figure 31: AT / ATX Power Mode Selection JP3	
Figure 32: MFG Mode Selection JP5	54
Figure 33: Clear CMOS Selection JP10	54
Figure 34: Flash Security Override Selection JP11	55
Figure 35: Power Output Selection JP15	55
Figure 36: BIOS Main Menu Screen System Data and Time	60
Figure 37: BIOS Advanced Menu	
Figure 38: BIOS Advanced Menu - FIA HSIO12 Configuration	63
Figure 39: BIOS Advanced Menu - CPU Chipset Configuration	65
Figure 40: BIOS Advanced Menu - SATA Configuration	66
Figure 41: BIOS Advanced Menu - USB Configuration	67
Figure 42: BIOS Advanced Menu - Trsted Computing	68
Figure 43: BIOS Advanced Menu - Network Stack Configuration	69
Figure 44: BIOS Advanced Menu - DIO Configuration	70
Figure 45: BIOS Advanced Menu - Super IO Configuration	71
Figure 46: BIOS Advanced Menu - Super IO Configuration - Serial Port 1 Configuration	71
Figure 47: BIOS Advanced Menu - Super IO Configuration - Serial Port 2 Configuration	72
Figure 48: BIOS Advanced Menu - Serial Port Console Redirection	73
Figure 49: BIOS Advanced Menu - Serial Port Console Redirection - COM1 / COM2 Console Redirection Settings	74
Figure 50: BIOS Advanced Menu - Serial Port Console Redirection - Legacy Console Redirection Settings	75
Figure 51: BIOS Advanced Menu - Serial Port Console Redirection - Out-of-Band Mgmt Port Console Redirection	
Settings	76
Figure 52: BIOS Advanced Menu - H/W Monitor	77
Figure 53: BIOS Power Setup Menu	78
Figure 54: BIOS Power Setup Menu - WatchDog Timer Configuration	79
Figure 55: BIOS Boot Setup Menu	
Figure 56: BIOS Boot Setup Menu	81
Figure 57: BIOS Boot Setup Menu	83

# 1/ Introduction

This user guide describe the mITX-DNV board made by Kontron. This board will also be denoted mITX-DNV within this user guide.

Use of this user guide implies a basic knowledge of PC-AT hardware and software. This user guide focuses on describing the mITX-DNV board's special features and is not intended to be a standard PC-AT textbook.

New users are recommended to study the short installation procedure stated in the following chapter before switching on the power.

All configuration and setup of the CPU board is either carried out automatically or manually by the user via the BIOS setup menus.

Latest revision of this user guide, datasheet, thermal simulations, BIOS, drivers, BSP's (Board Support Packages), mechanical drawings (2D and 3D) can de download from Kontron's Web Page.

### 2/Installation Procedures

### 2.1. Installing the Board

#### NOTICE

#### **ESD Sensitive Device**



Electrostatic discharge (ESD) can damage equipment and impair electrical circuitry.

- Wear ESD-protective clothing and shoes
- Wear an ESD-preventive wrist strap attached to a good earth ground
- Check the resistance value of the wrist strap periodically (1 M $\Omega$  to 10 M $\Omega$ )
- Transport and store the board in its antistatic bag
- Handle the board at an approved ESD workstation
- Handle the board only by the edges

To get the board running follow these steps. If the board shipped from KONTRON already has components like RAM and CPU cooler mounted, then skip the relevant steps below.

### 1. Turn off the PSU (Power Supply Unit)

### NOTICE

Turn off PSU (Power Supply Unit) completely (no mains power connected to the PSU) or leave the Power Connectors unconnected while configuring the board. Otherwise, components (RAM, LAN cards etc.) might get damaged. Make sure PSU has 3.3V monitoring watchdog (standard ATX PSU feature). Running the board without 3.3V will damage the board within minutes.

#### 2. Insert the DDR4 1866 / 2133 module(s)

Be careful to push the memory module(s) in the slot(s) before locking the tabs.

#### 3. Cooler Installation

You can connect the cooler fan electrically to the CPU Fan connector.

### 4. Connecting interfaces

Insert all external cables for hard disk, keyboard etc. A monitor must be connected in order to change BIOS settings.

#### 5. Connect and turn on PSU

Connect PSU to the board by the 24-pin ATX power connector (Figure 2, pos. 8).

### 6. BIOS setup

Enter the BIOS setup by pressing the <DEL> key during boot up.

Enter "Exit Menu" and Load Setup Defaults.



To clear all BIOS setting, including Password protection, activate "Clear CMOS Jumper" for 10 sec (without power connected).

### 7. Mounting the board in chassis

#### NOTICE

When mounting the board to chassis etc. please note that the board contains components on both sides of the PCB that can easily be damaged if board is handled without reasonable care. A damaged component can result in malfunction or no

#### function at all.

When fixing the board on a chassis, it is recommended to use screws with an integrated washer and a diameter of > 7 mm. Do not use washers with teeth, as they can damage the PCB and cause short circuits.

### 2.2. Chassis Safety Standards

Before installing the mITX-DNV in the chassis, users must evaluate the end product to ensure compliance with the requirements of the IEC60950-1 safety standard:

- The board must be installed in a suitable mechanical, electrical and fire enclosure.
- The system, in its enclosure, must be evaluated for temperature and airflow considerations.
- The board must be powered by a CSA or UL approved power supply that limits the maximum input current.
- For interfaces having a power pin such as external power or fan, ensure that the connectors and wires are suitably rated. All connections from and to the product shall be with SELV circuits only.
- Wires have suitable rating to withstand the maximum available power.
- The peripheral device enclosure fulfils the IEC60950-1 fire protecting requirements.

### 2.3. Lithium Battery Replacement

If replacing the lithium battery follow the replacement precautions stated in the notification below:

#### **ACAUTION**

#### Danger of explosion if the lithium battery is incorrectly replaced.

- Replace only with the same or equivalent type recommended by the manufacturer
- Dispose of used batteries according to the manufacturer's instructions

#### VORSICHT! Explosionsgefahr bei unsachgemäßem Austausch der Batterie.

- Ersatz nur durch denselben oder einen vom Hersteller empfohlenen gleichwertigen Typ
- Entsorgung gebrauchter Batterien nach Angaben des Herstellers

#### ATTENTION! Risque d'explosion avec l'échange inadéquat de la batterie.

- Remplacement seulement par le même ou un type équivalent recommandé par le producteur
- L'évacuation des batteries usagées conformément à des indications du fabricant

#### PRECAUCION! Peligro de explosión si la batería se sustituye incorrectamente.

- Sustituya solamente por el mismo o tipo equivalente recomendado por el fabricante
- Disponga las baterías usadas según las instrucciones del fabricante

### ADVARSEL! Lithiumbatteri – Eksplosionsfare ved fejlagtig håndtering.

- Udskiftning må kun ske med batteri af samme fabrikat og type
- Levér det brugte batteri tilbage til leverandøren

#### ADVARSEL! Eksplosjonsfare ved feilaktig skifte av batteri.

- Benytt samme batteritype eller en tilsvarende type anbefalt av apparatfabrikanten
- Brukte batterier kasseres i henhold til fabrikantens instruksjoner

#### VARNING! Explosionsfara vid felaktigt batteribyte.

- Använd samma batterityp eller en ekvivalent typ som rekommenderas av apparattillverkaren
- Kassera använt batteri enligt fabrikantens instruktion


#### VAROITUS! Paristo voi räjähtää, jos se on virheellisesti asennettu.

- Vaihda paristo ainoastaan lalteval- mistajan suosittelemaan tyyppiln
- Hävitä käytetty paristo valmistajan ohjeiden mukaisesti

# 3/ System Specifications

### 3.1. System Block Diagram

Figure 1: System Block Diagram mITX-DNV

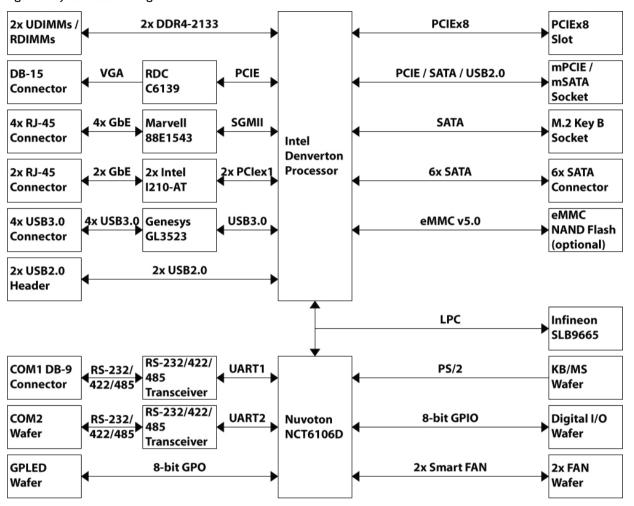

# 3.2. Component Main Data

The table below summarizes the features of the mITX-DNV motherboard.

Table 1: Component Main Data

rable i. Component Mai	
System	
Processor	Intel® Denverton SoC Processors, Atom™ C3000 Series
Memory	Up to 2x DDR4 UDIMM memory socket
Video	
Display Interface	1x VGA (on rear)
Network Connection	
Ethernet	6x GbE LAN (RJ45 on rear, 2x Intel® I210-AT, 4x Marvell® 88E1543)
Peripheral Connection	n
USB	4x USB 3.0 (Type A on rear from HUB)
	2x USB 2.0 (by wafer from SoC)
Serial Port	2x RS232/422/485 (1x DB9 on rear with 5 V / 12 V power output support, 1x by wafer)
Other I/Os	1x PS/2 Keyboard/Mouse (by wafer)
	1x 8-bit DIO (by wafer)
Storage & Expansion	
Storage &	Up to 6x SATA 3.0
Expansion	eMMC support (optional)
	1x M.2 Key-B (type 2280, for SSD only)
	1x mSATA / mPCIe (full size, mixed with SATA, USB 2.0)
	1x PClex8 (suppoting PCle x1/x4/x8 depending on HSIO selection)
	1x Micro SIM Card Cage (by wafer)
Power	
Input Voltage	DC +5V / -5V / +12V / -12V / +3.3V / 5VSB
Connector	2x12-pin ATX connector
Firmware	
BIOS	AMI uEFI BIOS w/ 128 Mb SPI Flash
Watchdog	Programmable WDT to generate system reset event
H/W Monitor	Voltages, Temperatures
Real Time Clock	SoC integrated RTC
TPM	Optional (Infineon SLB9665 TPM 2.0)
System Control & Mo	nitoring
FP Header	1x Header for Reset button, HDD LED & External Speaker
	1x Header for Power button, Power LED & SM bus
	1x Header for 6x LAN LED
	1x Header for mPCle LED
	1x Wafer for 8x General Purpose LED
Cooling	
FAN	1x Wafer for CPU Smart Fan
	1x Wafer for System Smart Fan

Software		
OS Support Windows Server		
Mechanical		
<b>Dimension (L x W)</b> Mini-ITX (170 mm x 170 mm / 6.70" x 6.70")		

### 3.3. Environmental Conditions

The mITX-DNV is compliant with the following environmental conditions. It is the customer's responsibility to provide sufficient airflow around each of the components to keep them within the allowed temperature range.

Table 2: Environmental Conditions

Operating Temperature	0 °C ~ 60 °C / 32 °F ~ 140 °F (Standard)	
	-20 °C ~ 70 °C / -4 °F ~ 158 °F (Extended)	
Storage Temperature	-20 °C ~ 80 °C / -4 °F ~ 176 °F (Standard)	
	-40 °C ~ 85 °C / -40 °F ~ 185 °F (Extended)	
Humidity	0 % ~ 95 %	

### 3.4. Standards and Certifications

The mITX-DNV meets the following standards and certification tests.

Table 3: Standards and Certifications

CE	EN 55022: 2010 + AC: 2011 Class A
	EN 55024: 2010
	EN 61000-3-2: 2006 + A1: 2009 + A2: 2009 Class D
	EN 61000-3-3: 2013
	EN 60950-1: 2006 + A11: 2009 + A1: 2010 + A12: 2011 + A2: 2013
	IEC 60950-1: 2005 (Second Edition) + Am 1: 2009 + Am 2: 2013
FCC	FCC CFR Title 47 Part 15 Subpart B: 2014
	ANSI C63.4-2009
	ICES-003 Issue 5: 2012
	CISPR 22: 2008
	CAN/CSA-CISPR 22-10

### 3.5. Processor Support

The mITX-DNV is designed to support Intel® Denverton Processors, Atom™ C3000 Series. The BGA CPU is remounted from factory. Kontron has defined the board versions as listed in the following table, so far all based on Embedded CPUs. Other versions are expected at a later date.

Table 4: Processor Support

Name	Core #	Speed	Turbo	Embedded	Cache	Socket	TDP	Tj
Atom™ C3338	2	1.50 GHz	2.20 GHz	Yes	4M	FCBGA1310	9 W	100 °C
Atom™ C3538	4	2.10 GHz	2.10 GHz	Yes	8M	FCBGA1310	15 W	100 °C

Sufficient cooling must be applied to the CPU in order to remove the effect as listed as TDP (Thermal Design Power) in above table. The sufficient cooling is also depending on the worst case maximum ambient operating temperature and the actual worst case load of processor.

### 3.6. System Memory Support

The mITX-DNV has two DDR4 UDIMM socket. The socket supports the following memory features:

- 1x DDR4 UDIMM 288-pin (Atom™ C3338)
- 2x DDR4 UDIMM 288-pin (Atom™ C3538)
- 1866 / 2133 MHz memory speed
- SPD timing supported
- ECC supported

The installed DDR4 UDIMM should support the Serial Presence Detect (SPD) data structure. This allows the BIOS to read and configure the memory controller for optimal performance. If non-SPD memory is used, the BIOS will attempt to configure the memory settings, but performance and reliability may be impacted, or the board may not be able to boot totally.

### 3.6.1. Memory Operating Frequencies

In all modes, the frequency of system memory is the lowest frequency of all the memory modules placed in the system. Each memory module's frequency can be determined through the SPD registers on the memory modules.

The table below lists the resulting operating memory frequencies based on the combination of UDIMMs and processor.

Table 5: Memory Operating Frequencies

SO-DIMM Type	Module Name	Memory Data Transfer (MT/s)	Processor System Bus Frequency (MHz)	Resulting Memory Clock Frequency (MHz)	Peak Transfer Rate (MB/s)
DDR4 1866	PC4-14900	1866.67	933.33	233.33	14933.33
DDR4 2133	PC4-17000	2133.33	1066.67	266.67	17066.67

Memory modules have in general a much lower longevity than embedded motherboards, and therefore EOL of modules can be expected several times during lifetime of the motherboard.

As a minimum it is recommend using Kontron memory modules for prototype system(s) in order to prove stability of the system and as for reference.

For volume production you might request to test and qualify other types of RAM. In order to qualify RAM it is recommend configuring 3 systems running RAM Stress Test program in heat chamber at 60° C for a minimum of 24 hours.

### 3.7. On-board Graphics Subsystem

The mITX-DNV integrates a VGA GPU based on the PCIe high-speed interface for small screen display applications.

### Table 6: Display Configuration

Display	Max. Resolution (Px) at 60 Hz
VGA	1024 x 768

### 3.8. Power Supply

In order to ensure safe operation of the board, the input power supply must monitor the supply voltage and shut down if the supply is out of range – refer to the actual power supply specification. Please note, in order to keep the power consumption to a minimal level, boards do not implement a guaranteed minimum load. In some cases, this can lead to compatibility problems with ATX power supplies that require a minimum load to stay in regulation. The mITX-DNV board must be powered through the 24-pin ATX (24-pole) connector using standard ATX power supply.

ATX supply: ATX-24p connector must be used in according to the ATX PSU standard.



Hot Plugging power supply is not supported. Hot plugging might damage the board.

The requirements to the supply voltages are as follows:

Table 7: Supply Voltages

Supply	Min.	Мах.	Note	
VCC3.3	3.135 V	3.265 V	Should be ±5% for compliance with the ATX specification	
Vcc	4.75 V	5.25 V	Should be ±5% for compliance with the ATX specification.	
			Should be minimum 5.00 V measured at USB connectors in order to meet the requirements of USB standard.	
+12 V	11.4 V	12.6 V	Should be ±5% for compliance with the ATX specification	
-12 V	-13.2 V	-10.8 V	Should be ±10% for compliance with the ATX specification	
-5 V	-5.50 V	-4.5 V	Not required for the mITX-DNV boards	
5VSB	4.75 V	5.25 V	Should be ±5% for compliance with the ATX specification	

# 4/Connector Locations

# 4.1. Top Side

Figure 2: Top Side

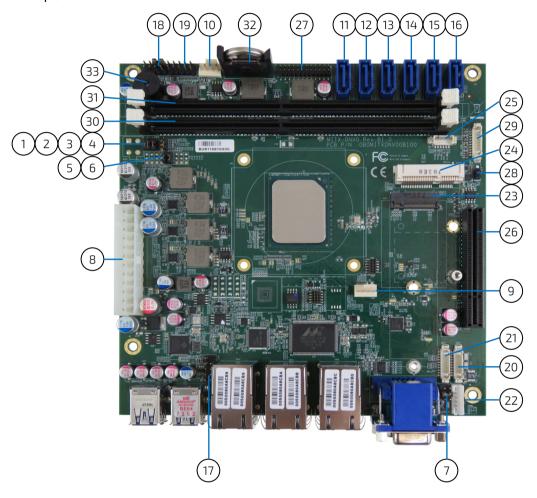


Table 8: Jumper List

Item	Designation	Description See Chapter	
1	JP1	mPCIE / mSATA Selection for MPCIE1	7.16.1
2	JP2	USB Power Selection	7.16.2
3	JP3	AT / ATX Power Mode Selection 7.16.3	
4	JP5	MFG Mode Selection 7.16.4	
5	JP10	Clear CMOS Selection 7.16.5	
6	JP11	Flash Security Override Selection 7.16.6	
7	JP15	Power Output Selection for COM1 Pin-9 7.16.7	

Table 9: Top Side Internal Connector Pin Assignment

Item	Designation	Description	See Chapter
8	ATX1	2x12-Pin ATX Power Input Wafer	7.1
9	FAN1	CPU FAN Wafer 7.	

Item	Designation	Description	See Chapter
10	FAN2	System FAN Wafer 7.2	
11	SATA1	SATA Port-1 Connector 7.3	
12	SATA2	SATA Port-2 Connector	7.3
13	SATA3	SATA Port-3 Connector	7.3
14	SATA4	SATA Port-4 Connector	7.3
15	SATA5	SATA Port-5 Connector	7.3
16	SATA6	SATA Port-6 Connector	7.3
17	CN17	USB2.0 Port-1, 2 Header	7.4
18	FP1	Front Panel Header 1	7.5
19	FP2	Front Panel Header 2	7.5
20	CN16	RS-232/422/485 COM2 Wafer 7.6	
21	CN15	8-bit Digital Input / Output Wafer 7.7	
22	CN21	PS/2 KB/MS Wafer 7.8	
23	M2B1	M.2 Key-B SSD Slot 7.9	
24	MPCIE1	mPCIE / mSATA Port-1 Slot 7.10	
25	CN4	SIM Interface Wafer for MPCIE1 7.11	
26	PCIE1	PCIE x8 Slot	7.12
27	CN2	GbE LAN LED Header	7.13
28	CN5	Wireless Activity LED Header for MPCIE1	7.14
29	CN25	General Purpose LED Wafer 7.15	
30	DIMM1	Channel-0 DDR4 DIMM Slot 3.6	
31	DIMM2	Channel-1 DDR4 DIMM Slot 3.6	
32	CN1	CR2032 Battery Holder	
33	BZ1	Onboard Buzzer	

# 4.2. Connector Panel Side

Figure 3: Connector Panel Side

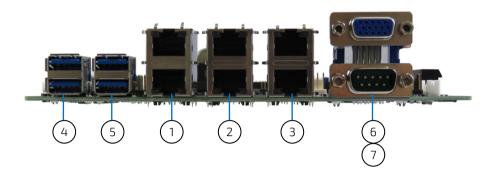


Table 10: Connector Panel Side Connector List

Item	Designation	Description See Cha	
1	CN18	GbE LAN1, 2 RJ45 Connector	6.2
2	CN19	GbE LAN3, 4 RJ45 Connector	6.2
3	CN20	GbE LAN5, 6 RJ45 Connector 6.2	
4	CN22	USB 3.0 Port 3, 4 Connector 6.3	
5	CN23	USB 3.0 Port 1, 2 Connector 6.3	
6	CN24	VGA Connector 6.1	
7	CN26	RS232/422/485 COM1 Connector 6.4	

# 5/ Connector Definitions

The following defined terms are used within this user guide to give more information concerning the pin assignment and to describe the connector's signals.

Defined Term	Description	
Pin	Shows the pin numbers in the connector	
Signal	The abbreviated name of the signal at the current pin	
	The notation "XX#" states that the signal "XX" is active low	
Note	Special remarks concerning the signal	
Designation	Type and number of item described	
See Chapter	Number of the chapter within this user guide containing a detailed description	

The abbreviation TBD is used for specifications that are not available yet or which are not sufficiently specified by the component vendors.

# 6/I/O-Area Connectors

# 6.1. VGA Connector (CN24)

The external I/O connector panel supports one DB-15 VGA female port.

### Figure 4: VGA Connector CN24




Table 11: Pin Assignment VGA Connector CN24

Pin	Signal	Description		
1	Red	Analogue output carrying the red colour values. (75 Ohm cable impedance).		
2	Green	Analogue output carrying the green colour values. (75 Ohm cable impedance).		
3	Blue	Analogue output carrying the blue colour values. (75 Ohm cable impedance).		
4	NC	No Connection		
5	GND	Ground		
6	GND	Ground		
7	GND	Ground		
8	GND	Ground		
9	VCC	5V supply input		
10	GND	Ground		
11	NC	No Connection		
12	DDC data	Display Data Channel Data. Used as data signal to/from monitors with DDC interface.		
13	HSYNC	CRT horizontal synchronization output.		
14	VSYNC	CRT vertical synchronization output.		
15	DDC clock	Display Data Channel Clock. Used as clock signal to/from monitors with DDC interface.		

### 6.2. Ethernet Connectors (CN18, CN19 & CN20)

The mITX-DNV supports six channels of 10/100/1000 Mbit Ethernet, which are based Intel® I210-AT (LAN1 & LAN2 (CN18)) and Marvell® 88E1543 (LAN3 & LAN4 (CN19), LAN5 & LAN6 (CN20)) controllers respectively.

In order to achieve the specified performance of the Ethernet port, Category 5 twisted pair cables must be used with 10/100 MByte and Category 5E, 6 or 6E with 1 Gbit LAN networks.

The signals for the Ethernet ports are as follows:

Figure 5: Ethernet Connectors CN18, CN19, CN20

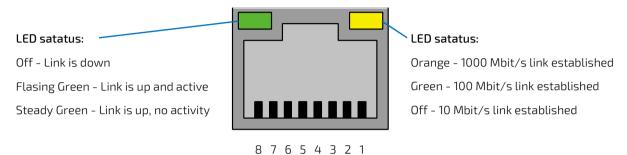


Table 12: Pin Assignment Ethernet Connectors CN18, CN19, CN20

Pin	Signal	Note
1	MDI[0]+	
2	MDI[0]-	
3	MDI[1]+	
4	MDI[1]-	
5	MDI[2]+	
6	MDI[2]-	
7	MDI[3]+	
8	MDI[3]-	

### Signal Description

Signal	Description
MDI[0]+ / MDI[0]-	In MDI mode, this is the first pair in 1000Base-T, i.e. the BI_DA+/- pair, and is the transmit pair in 10Base-T and 100Base-TX. In MDI crossover mode, this pair acts as the BI_DB+/- pair, and is the receive pair in 10Base-T and 100Base-TX.
MDI[1]+ / MDI[1]-	In MDI mode, this is the second pair in 1000Base-T, i.e. the BI_DB+/- pair, and is the receive pair in 10Base-T and 100Base-TX. In MDI crossover mode, this pair acts as the BI_DA+/- pair, and is the transmit pair in 10Base-T and 100Base-TX.
MDI[2]+ / MDI[2]-	In MDI mode, this is the third pair in 1000Base-T, i.e. the BI_DC+/- pair. In MDI crossover mode, this pair acts as the BI_DD+/- pair.
MDI[3]+ / MDI[3]-	In MDI mode, this is the fourth pair in 1000Base-T, i.e. the BI_DD+/- pair. In MDI crossover mode, this pair acts as the BI_DC+/- pair.

'MDI' – media dependent Interface

# 6.3. USB Connectors (I/O Area)

The external I/O connector panel supports two dual USB 3.0 connectors.



USB3.0 ports are backward compatible with USB2.0.

Figure 6: USB 3.0 Connector CN22, CN23




Table 13: Pin Assignment USB3.0 / USB2.0 Connector CN22, CN23

Pin	Signal	Note		
	Jigilat	Note		
Тор				
18	USBB_TX+	USB 3.0 Tx. Differential Pair (+)		
17	USBB_TX-	USB 3.0 Tx. Differential Pair (-)		
16	GND			
15	USBB_RX+	USB 3.0 Tx. Differential Pair (+)		
14	USBB_RX-	USB 3.0 Tx. Differential Pair (-)		
13	GND			
12	USBB_D-	USB 2.0 Differential Pair (+)		
11	USBB_D-	USB 2.0 Differential Pair (-)		
10	+USBB_VCC*	+5 V Supply for USB device		
Botto	Bottom			
9	USBA_TX+	USB 3.0 Tx. Differential Pair (+)		
8	USBA_TX-	USB 3.0 Tx. Differential Pair (-)		
7	GND			
6	USBA_RX+	USB 3.0 Tx. Differential Pair (+)		
5	USBA_RX-	USB 3.0 Tx. Differential Pair (-)		
4	GND			
3	USBA_D-	USB 2.0 Differential Pair (+)		
2	USBA_D-	USB 2.0 Differential Pair (-)		
1	+USBA_VCC*	+5 V Supply for USB device		




\* The power source of +USBVCC can be selected by JP2.

Table 14: Signal Description

Signal	Description
USBn_TX+, USBn_TX-, USBn_RX+, USBn_RX-, USBn_D-, USBn_D-	Differential pair works as serial differential receive/transmit data lines. (n= A, B)
+USBn_VCC	5 V supply for external devices. VCC is supplied during power-down to allow wakeup on USB device activity. Protected by a 1A current limiting IC covering each of the USB port. (n= A, B)

For HiSpeed rates it is required to use a USB cable, which is specified in USB 2.0 standard:

Figure 7: USB 2.0 High Speed Cable

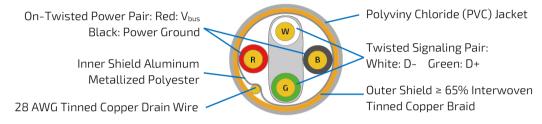

For USB 3.0 cabling it is required to use only HiSpeed USB cable, specified in USB3.0 standard:

Figure 8: USB 3.0 High Speed Cable



# 6.4. RS232/422/485 COM1 Connector (CN26)

The external I/O connector panel supports one DB9 RS232/422/485 port.

Figure 9: RS232/422/485 COM1 Connector CN26




Table 15: Pin Assignment RS232/422/485 COM1 Connector CN26

Pin	RS232 Signal	RS422 Signal	RS485 Signal	Note
1	DCD	TX-	DATA-	
2	RXD	TX+	DATA+	
3	TXD	RX+	-	
4	DTR	RX-	-	
5	GND	GND	GND	
6	DSR	-	-	
7	RTS	-	-	
8	CTS	-	-	
9	RI	-	-	

Table 16: Signal Description

Signal	Description	
DCD	Data Carrier Detect, indicates that the modem or data set has detected the data carrier.	
RXD	Received Data, receives data from the communications link.	
TXD	Transmitted Data, sends data to the communications link. The signal is set to the marking state (-12 V) on hardware reset when the transmitter is empty or when loop mode operation is initiated.	
DTR	Data Terminal Ready, indicates to the modem etc. that the on-board UART is ready to establish communication link.	
GND	Power Supply GND signal	
DSR	Data Set Ready, indicates that the modem etc. is ready to establish a communications link.	
RTS	Request To Send, indicates to the modem etc. that the on-board UART is ready to exchange data.	
CTS	Clear To Send, indicates that the modem or data set is ready to exchange data.	
RI	Ring Indicator, indicates that the modem has received a ringing signal from the telephone line.	
TX+/-	Transmitted Data differential pair sends data to the communications link.	
RX+/-	Received Data differential pair receives data from the communications link.	

# 7/ Internal Connectors

# 7.1. Power Input Wafer (ATX1)

The mITX-DNV boards are designed to be supplied from a standard ATX power supply.

### NOTICE

Hot plugging any of the power connector is not allowed.

Hot plugging might damage the board. In other words, turn off main supply etc. to make sure all the power lines are turned off when connecting to the motherboard.

Figure 10: Power Input Wafer ATX1




Table 17: Pin Assignment ATX1

Pin	Signal	Description
1	+3.3V	
2	+3.3V	
3	GND	Ground
4	+5V	
5	GND	Ground
6	+5V	
7	GND	Ground
8	POWER OK	
9	+5VSB	
10	+12V	
11	+12V	
12	+3.3V	
13	+3.3V	
14	-12V	
15	GND	Ground
16	PS_ON	
17	GND	
18	GND	Ground
19	GND	Ground

Pin	Signal	Description
20	-5V	
21	+5V	
22	+5V	
23	+5V	
24	GND	Ground

# Table 18: Signal Description

Signal	Description
POWER OK	POWER_OK is a power good signal and should be asserted high by the power supply to indicate that the +5VDC and +3.3VDC outputs are above the undervoltage thresholds of the power supply. When this signal is asserted high, there should be sufficient energy stored by the converter to guarantee continuous power operation within specification. Conversely, when the output voltages fall below the undervoltage threshold, or when mains power has been removed for a time sufficiently long so that power supply operation is no longer guaranteed, POWER_OK should be de-asserted to a low state. The recommended electrical and timing characteristics of the POWER_OK signal are provided in the ATX12V Power SupplyDesign Guide.
	It is strongly recommended to use an ATX supply, in order to implement the supervision of the 5V and 3V3 supplies. These supplies are not supervised on-board.
PS_ON	Active low open drain signal from the board to the power supply to turn on the power supply outputs. Signal must be pulled high by the power supply.

# 7.2. CPU / System Fan Wafer (FAN1 & FAN2)

The CPU Fan Wafer (FAN1) is used for the connection of the Fan for the CPU. The System Fan Wafer (FAN2) can be used to power, control and monitor a fan for chassis ventilation etc.

The 4-pin wafer is recommended to be used for driving 4-wire type FAN in order to implement FAN speed control. 3-wire Fan support is also possible, but no fan speed control is integrated.

Figure 11: CPU / System Fan Wafer FAN1, FAN2



Table 19: 4-Pin Mode FAN1, FAN2

Pin	Signal	Description
1	GND	Ground
2	+12V	Power +12V
3	SENSE	Sense signal
4	PWM	PWM output

Table 20: 3-Pin Mode FAN1, FAN2

Pin	Signal	Description
1	GND	Ground
2	+12V	Power +12V
3	SENSE	Sense signal
4	-	Not used

Table 21: Signal description

Signal	Description
GND	Power Supply GND signal
+12V	+12 V supply for fan
SENSE	Sense input signal from the fan, for rotation speed supervision RPM (Rotations Per Minute). The signal shall be generated by an open collector transistor or similar.
PWM	PWM output signal for FAN speed control

# 7.3. SATA (Serial ATA) Port 1 ~ Port 6 Connector (SATA1 ~ SATA6)

The SATA connectors supply the data connection for the SATA hard disk and are SATA 3.0 compatible.

Figure 12: SATA Port 1 ~ Port 6 Connector SATA1 ~ SATA6




Table 22: Pin Assignment SATA1 ~ SATA6

Pin	Signal	Note
1	GND	
2	TX+	
3	TX-	
4	GND	
5	RX-	
6	RX+	
7	GND	

Table 23: Signal Description

Signal	Description	
RX+ / RX-	/ RX- Host transmitter differential signal pair	
TX+ / TX- Host receiver differential signal pair		

# 7.4. USB Connectors (Internal) (CN17)

The USB port pin header CN17 supports two USB 2.0 ports.

Figure 13: USB 2.0 Port 1, 2 Pin Header CN17



Table 24: Pin Assignment CN5

Pin	Signal	Note
1	+USBVCC	
2	+USBVCC	
3	USB_A-	
4	USB_B-	
5	USB_A+	
6	USB_B+	
7	GND	
8	GND	
9	KEY	
10	GND	



The power source of +USBVCC can be selected by JP2.

Table 25: Signal Description

Signal	Description
+USBVCC	5 V supply for external devices. SB5V is supplied during power down to allow wakeup on USB device activity. Protected by active power switch 1 A fuse for each USB port.
USB_A-/+	Universal Serial Bus Differentials: Bus Data / Address / Command Bus.
USB_B-/+	

# 7.5. Front Panel Pin Header (FP1 & FP2)

Figure 14: Front Panel 1 Pin Header FP1

Table 26: Pin Assignment FP1

Pin	Signal	Note
1	Reset Button +	
2	Speaker +	
3	Reset Button -	
4	NC	
5	HDD LED +	
6	Internal Speaker -	
7	HDD LED -	
8	Speaker -	



Internal Buzzer is enabled when Pin6-8 is shorted.

Table 27: Signal Description

Signal	Description	
Reset Button -/+	eset Button. This 2-pin connector is for chassis mounted reset button for system reboot without urning off the system power.	
HDD LED -/+	Hard Disk Drive Activity LED. This 2-pin connector is for HDD Activity LED. Connect the HDD Activity LED cable to this connector. The HDD LED lights up or flashes when data is read from or written to the HDD.	
Internal Speaker - Speaker -/+	System warning speaker. The speaker allows user to hear beeps and warnings.	

Figure 15: Front Panel 2 Pin Header FP2




Table 28: Pin Assignment FP2

Pin	Signal	Note
1	Power LED +	

Pin	Signal	Note
2	Power Button +	
3	NC	
4	Power Button -	
5	Power LED -	
6	SM_ALERT#	
7	BAT_LOW#	
8	SMBus Data	
9	GND	
10	SMBus Clock	

#### Table 29: Signal Description

Signal	Description
Power LED - /+	System Power LED. The power LED lights up when users turn on the system power, and blinks when the system is in sleep mode.
Power Button -/+	The 2-pin connector is for the system power button. Pressing the power button turns the system on or puts the system in sleep or soft-off mode depending on the operating system settings. Pressing the power switch for more than four seconds while the system turns from ON to OFF.
SM_ALERT#	System Management Bus Alert
SMBus Data	System Management Bus bidirectional data line
SMBus Clock	System Management Bus bidirectional clock line
BAT_LOW#	Battery low input. This signal may be driven low by external circuitry to signal that the system battery is low. It also can be used to signal some other external power management event.

## 7.6. Serial COM2 Ports (CN16)

Figure 16: Serial COM CN16




Table 30: Pin Assignment CN16

Pin	RS232 Signal	RS422 Signal	Half Duplex RS485 Signal	Full Duplex RS485 Signal	Note
1	DCD	TX-	DATA-	TX-	
2	DSR	-	-	-	
3	RXD	TX+	DATA+	TX+	
4	RTS	-	-	-	
5	TXD	RX+	-	RX+	
6	CTS	-	-	-	
7	DTR	RX-	-	RX-	
8	RI	-	-	-	
9	GND	GND	GND	GND	
10	+5V	+5V	+5V	+5V	



The COM ports need to install an OS patch from ITE. The patch is only available for Windows and is not available Linux.

Table 31: Signal Description

Signal	Description
TXD	Transmitted Data, sends data to the communications link. The signal is set to the marking state (-12 V) on hardware reset when the transmitter is empty or when loop mode operation is initiated.
RXD	Received Data, receives data from the communications link.
DTR	Data Terminal Ready, indicates to the modem etc. that the on-board UART is ready to establish communication link.
DSR	Data Set Ready, indicates that the modem etc. is ready to establish a communications link.
RTS	Request To Send, indicates to the modem etc. that the on-board UART is ready to exchange data.
CTS	Clear To Send, indicates that the modem or data set is ready to exchange data.
DCD	Data Carrier Detect, indicates that the modem or data set has detected the data carrier.
RI	Ring Indicator, indicates that the modem has received a ringing signal from the telephone line.
TX+/-	Transmitted Data differential pair sends data to the communications link.

Signal Description	
RX+/-	Received Data differential pair receives data from the communications link.
GND	Power Supply GND signal

## 7.7. Digital Input / Output Wafer (CN15)

Figure 17: Digital Input / Output Wafer CN15




Table 32: Pin Assignment CN15

Pin	Signal	Note
1	+5V	
2	DIO_0	
3	DIO_1	
4	DIO_2	
5	DIO_3	
6	DIO_4	
7	DIO_5	
8	DIO_6	
9	DIO_7	
10	GND	

## 7.8. PS/2 Keyboard and Mouse Wafer (CN21)

Attachment of a PS/2 keyboard / mouse can be done through the pinrow connector CN21. Both interfaces utilize open-drain signalling with on-board pull-up.

Figure 18: PS/2 Keyboard / Mouse Wafer CN21




Table 33: Pin Assignment CN21

Pin	Signal	Note
1	MSCLK	
2	VCC	
3	MSDAT	
4	KBDAT	
5	GND	
6	KBCLK	


Table 34: Signal Description

Signal	Description
MSCLK Bi-directional clock signal used to strobe data/commands from/to the PS/2 mouse.	
MSDAT	Bi-directional serial data line used to transfer data from or commands to the PS/2 mouse.
KBCLK	Bi-directional clock signal used to strobe data/commands from/to the PC-AT keyboard.
KBDAT	Bi-directional serial data line used to transfer data from or commands to the PC-AT keyboard.

## 7.9. M.2 Key-B SSD Slot (M2B1)

The mITX-DNV supports M.2 modules in format 2280 with Key B. The M.2 specification enables one SATA3.0 (6 Gb/s) SSD socket to be exposed.

Figure 19: M.2 Key-B SSD Slot M2B1

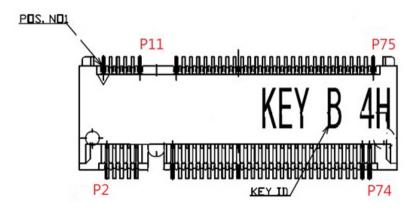

SATA M.2 requires the following BIOS depending on the class code options below.

M.2 SSD	Boot	Storage
SATA M.2 SSD	Supported	Supported

Table 35: Pin Assignment CON1

Pin	Signal	Note
1	-	
2	+3.3V	
3	GND	
4	+3.3V	
5	GND	
6	-	
7	-	
8	-	
9	-	
10	-	
11	GND	
12	KEY B	
13	KEY B	
14	KEY B	
15	KEY B	
16	KEY B	
17	KEY B	
18	KEY B	
19	KEY B	
20	-	

Pin	Cignal	Note
	Signal	Note
21	-	
22	-	
23	-	
24	-	
25	-	
26	-	
27	GND	
28	-	
29	-	
30	-	
31	-	
32	-	
33	GND	
34	-	
35	-	
36	-	
37	-	
38	-	
39	GND	
40	-	
41	SATA_RX+	
42	-	
43	SATA_RX-	
44	-	
45	GND	
46	-	
47	SATA_TX-	
48	-	
49	SATA_TX+	
50	-	
51	GND	
52	-	
53	-	
54	-	
55	-	
56	-	
57	GND	
58	-	
59	-	
60	-	
61	_	
62	_	
<u> </u>		

<u>www.kontron.com</u> // 43

Pin	Signal	Note
63	-	
64	-	
65	-	
66	-	
67	-	
68	-	
69	-	
70	+3.3V	
71	GND	
72	+3.3V	
73	GND	
74	+3.3V	
75	-	

## 7.10. mPCIe / mSATA Socket (MPCIE1)

Full-sized Mini-PCI Express V1.2 socket (MPCIE1). Socket MPCIE1 supports mPCIe, mSATA, USB2.0 and SIM-card socket. The SIM-card socket makes it possible to use a 3G/4G-wireless modem in this mPCIe slot. The USB does support WAKE function.

Figure 20: mPCle Socket MPCIE1

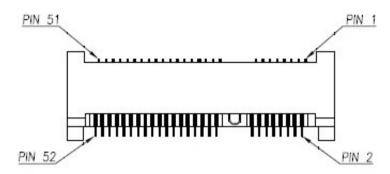


Table 36: Pin Assignment MPCIE1

Pin	Signal	Note
1	WAKE#	
2	+3.3VSB / +3.3V*	
3	Reserved	
4	Ground	
5	Reserved	
6	+1.5V	
7	CLKREQ#	
8	UIM_PWR**	
9	Ground	
10	UIM_DATA**	
11	REFCLK-	
12	UIM_CLK**	
13	REFCLK+	
14	UIM_RESET**	
15	Ground	
16	UIM_VPP**	
17	Reserved	
18	Ground	
19	Reserved	
20	W_Disable#	
21	Ground	
22	PERST#	
23	PERn0 / SATA_RX+*	
24	+3.3VSB / +3.3V*	
25	PERp0 / SATA_RX-*	

Pin	Signal	Note
26	Ground	
27	Ground	
28	+1.5V	
29	Ground	
30	SMB_CLK	
31	PETn0 / SATA_TX-*	
32	SMB_DATA	
33	PETp0 / SATA_TX+*	
34	Ground	
35	Ground	
36	USB_D-	
37	Ground	
38	USB_D+	
39	+3.3VSB / +3.3V*	
40	Ground	
41	+3.3VSB / +3.3V*	
42	LED_WWAN#	
43	Ground / NC*	
44	LED_WLAN#	
45	Reserved	
46	LED_WPAN#	
47	Reserved	
48	+1.5V	
49	Reserved	
50	Ground	
51	Reserved	
52	+3.3VSB / +3.3V*	



\* These pins are switchable to mSATA or mPCIe mode via the jumper JP1.



\*\* These pins are connected to CN4 SIM Interface directly.

## 7.11. SIM Interface Wafer for MPCIE1 (CN4)

Figure 21: SIM Interface Wafer CN4




Table 37: Pin Assignment CN4

Pin	Signal	Description	Note
1	UIM_PWR	Power +5V or +3.3V	
2	UIM_DATA	Input or Output for serial data	
3	UIM_RESET	Reset signal	
4	UIM_VPP	Programming voltage input	
5	UIM_CLK	Clock signal	
6	GND	Ground	

## 7.12. PCIE x8 Socket (PCIE1)

The 8-lane (x8) PCI Express slot connector can be used for external PCI Express cards inclusive graphics card and dedicated TMDS passive card. The slot is located nearest the edge of the board. Maximum theoretical bandwidth using 8 lines is  $8 \, \text{GB/s}$ .

Figure 22: PCIE x8 Socket PCIE1




Table 38: Pin Assignment PCIE1

Pin	Sid	Side B Connector		e A Connector
	Signal	Description	Signal	Description
1	+12V	+12 V power	PRSNT1#	Hot plug presence detect
2	+12V	+12 V power	+12V	+12 V power
3	RSVD	Reserved	+12V	+12 V power
4	GND	Ground	GND	Ground
5	SMCLK	SMBus clock	JTAG2	TCK
6	SMDAT	SMBus data	JTAG3	TDI
7	GND	Ground	JTAG4	TDO
8	+3.3V	+3.3 V power	JTAG5	TMS
9	JTAG1	+TRST#	+3.3V	+3.3 V power
10	3.3VAUX	3.3 V power	+3.3V	+3.3 V power
11	PCIE_WAKE#	Link Reactivation	PERST#	Reset
Mech	anical Key			
12	RSVD	Reserved	GND	Ground
13	GND	Ground	REFCLK+	Reference clock differential
14	PETp0	Transmitter Lane 0,	REFCLK-	pair
15	PETn0	differential pair	GND	Ground
16	GND	Ground	PERp0	Receiver Lane 0, differential
17	PRSNT2#	Hot plug presence detect	PERn0	pair
18	GND	Ground	GND	Ground
19	PETp1	Transmitter Lane 1, differential	RSVD	Reserved
20	PETn1	pair	GND	Ground

Pin		Side B Connector		Side A Connector
	Signal	Description	Signal	Description
21	GND	Ground	PERp1	Receiver Lane 1, differential
22	GND	Ground	PERn1	pair
23	PETp2	Transmitter Lane 2,	GND	Ground
24	PETn2	differential pair	GND	Ground
25	GND	Ground	PERp2	Receiver Lane 2, differential
26	GND	Ground	PERn2	pair
27	PETp3	Transmitter Lane 3,	GND	Ground
28	PETn3	differential pair	GND	Ground
29	GND	Ground	PERp3	Receiver Lane 3, differential
30	RSVD	Reserved	PERn3	pair
31	PRSNT2#	Hot plug presence detect	GND	Ground
32	GND	Ground	RSVD	Reserved
33	PETp4	Transmitter Lane 4,	RSVD	Reserved
34	PETn4	differential pair	GND	Ground
35	GND	Ground	PERp4	Receiver Lane 4, differential
36	GND	Ground	PERn4	pair
37	PETp5	Transmitter Lane 5, differential	GND	Ground
38	PETn5	pair	GND	Ground
39	GND	Ground	PERp5	Receiver Lane 5, differential
40	GND	Ground	PERn5	pair
41	PETp6	Transmitter Lane 6,	GND	Ground
42	PETn6	differential pair	GND	Ground
43	GND	Ground	PERp6	Receiver Lane 6, differential
44	GND	Ground	PERn6	pair
45	PETp7	Transmitter Lane 7, differential	GND	Ground
46	PETn7	pair	GND	Ground
47	GND	Ground	PERp7	Receiver Lane 7, differential
48	PRSNT2#	Hot plug presence detect	PERn7	pair
49	GND	Ground	GND	Ground

## 7.13. GbE LAN LED Header (CN2)

Figure 23: GbE LAN LED Header CN2




Table 39: Pin Assignment CN2

Pin	Signal	Description	Note
1	LAN1_LINK+		
2	LAN1_LINK-		
3	LAN1_100#		
4	LAN1_1000#		
5	LAN2_LINK+		
6	LAN2_LINK-		
7	LAN2_100#		
8	LAN2_1000#		
9	LAN3_LINK+		
10	LAN3_LINK-		
11	LAN3_100#		
12	LAN3_1000#		
13	LAN4_LINK+		
14	LAN4_LINK-		
15	LAN4_100#		
16	LAN4_1000#		
17	LAN5_LINK+		
18	LAN5_LINK-		
19	LAN5_100#		
20	LAN5_1000#		
21	LAN6_LINK+		
22	LAN6_LINK-		
23	LAN6_100#		
24	LAN6_1000#		

## 7.14. Wireless Activity LED Header for MPCIE1 (CN5)

Figure 24: Wireless Activity LED Header CN5

Table 40: Pin Assignment CN5

Pin	Signal	Description	Note
1	LED+		
2	LED-		

## 7.15. General Purpose LED Wafer (CN25)

Figure 25: General Purpose LED Wafer CN25




Table 41: Pin Assignment CN25

Pin	Signal	Description	Note
1	+5VSB_VCC		
2	GPLED#_1		
3	GPLED#_2		
4	GPLED#_3		
5	GPLED#_4		
6	GPLED#_5		
7	GPLED#_6		
8	GPLED#_7		
9	GPLED#_8		
10	GND		

For programming choose one of the following two examples.

Figure 26: Programming example 1


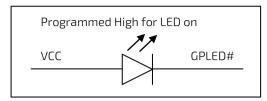


Figure 27: Programming example 2

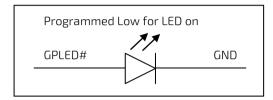


<u>www.kontron.com</u> // 52

#### 7.16. Switches and Jumpers

The product has several jumpers which must be properly configured to ensure correct operation.

Figure 28: Jumper Connector



For a three-pin jumper (see Figure 25), the jumper setting is designated "1-2" when the jumper connects pins 1 and 2. The jumper setting is designated "2-3" when pins 2 and 3 are connected and so on. You will see that one of the lines surrounding a jumper pin is thick, which indicates pin No.1.

To move a jumper from one position to another, use needle-nose pliers or tweezers to pull the pin cap off the pins and move it to the desired position.

#### 7.16.1. mPCIe / mSATA Selection for MPCIE1 (JP1)

Figure 29: mPCle / mSATA Selection JP1



Table 42: Pin Assignment JP1

Jumper F	osition	Description
Pin 1-2	Pin 2-3	Description
Х	-	mPCle
-	Х	mSATA

<sup>&</sup>quot;X" = Jumper set (short) and "-" = jumper not set (open)

#### 7.16.2. USB Power Selection (JP2)

Figure 30: USB Power Selection JP2



Table 43: Pin Assignment JP2

Jumper Position		Description
Pin 1-2	Pin 2-3	Description
Х	-	+5V
-	Х	+5VSB

<sup>&</sup>quot;X" = Jumper set (short) and "-" = jumper not set (open)

## 7.16.3. AT / ATX Power Mode Selection (JP3)

Figure 31: AT / ATX Power Mode Selection JP3



Table 44: Pin Assignment JP3

Jumper Position		Description
Pin 1-2	Pin 2-3	Description
Х	-	ATX Power Mode
-	Х	AT Power Mode

<sup>&</sup>quot;X" = Jumper set (short) and "-" = jumper not set (open)

## 7.16.4. MFG Mode Selection (JP5)

Figure 32: MFG Mode Selection JP5



Table 45: Pin Assignment JP5

Jumper Position		Description
Pin 1-2	Pin 2-3	Description
Х	-	Normal
-	Х	Enable MFG Mode

<sup>&</sup>quot;X" = Jumper set (short) and "-" = jumper not set (open)

### 7.16.5. Clear CMOS Selection (JP10)

Figure 33: Clear CMOS Selection JP10



Table 46: Pin Assignment JP10

Jumper Position		Description	
Pin 1-2	Pin 2-3	Description	
Х	-	Normal	
-	Х	Clear CMOS	

<sup>&</sup>quot;X" = Jumper set (short) and "-" = jumper not set (open)

## 7.16.6. Flash Security Override Selection (JP11)

Figure 34: Flash Security Override Selection JP11



Table 47: Pin Assignment JP11

Jumper Position		Description	
Pin 1-2	Pin 2-3	Description	
Х	-	Normal	
-	Х	Flash Security Override	

<sup>&</sup>quot;X" = Jumper set (short) and "-" = jumper not set (open)

## 7.16.7. Power Output Selection for COM1 Pin-9 (JP15)

Figure 35: Power Output Selection JP15



Table 48: Pin Assignment JP15

Jumper Position			Description
Pin 1-2	Pin 1-2 Pin 3-4 Pin 5-6		Description
Х	-	-	+5V
-	Х	-	RI#

Jumper Position			Description	
Pin 1-2	Pin 1-2 Pin 3-4 Pin 5-6		Description	
-	-	Х	+12V	

<sup>&</sup>quot;X" = Jumper set (short) and "-" = jumper not set (open)

# 8/On-Board Connectors & Mating Connector Types

The Mating connectors / Cables are connectors or cable kits which are fitting the On-board connector.

The cable kits marked with "\*" are included in the "mITX-DNV Cable & Driver Kit".

Table 49: On-Board Connectors & Mating Connector Types

Connector	On-Board Connectors		Mating Conne	ctors / Cables
	Manufact.	Type No.	Manufact.	Type No.
Power Input (ATX1)				
FAN (FAN1, FAN2)				
SATA (SATA1 ~ SATA6)				
USB 2.0 (CN17)				
Front Panel (FP1)				
Front Panel (FP2)				
COM (CN16)				
DIO (CN15)				
Keyboard / Mouse (CN21)				
M.2 Key-B (M2B1)				
mPCle / mSATA (MPCIE1)				
SIM (CN4)				
PCIE x8 (PCIE1)				
LAN LED (CN2)				
MPCIE1 Activity LED (CN5)				



Please note that standard connectors like DP, mPCIe, Audio Jack, Ethernet and USB are not included in the list.

#### **9/BIOS**

#### 9.1. Starting the uEFI BIOS

The mITX-DNV is provided with a Kontron-customized, pre-installed and configured version of AMI Aptio® V uEFI BIOS. AMI BIOS firmware is based on the Unified Extensible Firmware Interface (UEFI) specification and the Intel® Platform Innovation Framework for EFI. This uEFI BIOS provides a variety of new and enhanced functions specifically tailored to the hardware features of the mITX-DNV.

The uEFI BIOS comes with a setup program that provides quick and easy access to the individual function settings for control or modification of the uEFI BIOS configuration. The setup program allows the accessing of various menus that provide functions or access to sub-menus with more specific functions of their own.

To start the uEFI BIOS setup program, follow the steps below:

- 1. Power on the board.
- 2. Wait until the first characters appear on the screen (POST messages or splash screen).
- 3. Press the <DEL> kev.
- 4. If the uEFI BIOS is password-protected, a request for password will appear. Enter either the User Password or the Supervisor Password (see Security menu), press <RETURN>, and proceed with step 5.
- 5. A setup menu will appear.

The mITX-DNV uEFI BIOS setup program uses a hot key-based navigation system. A hot key legend bar is located on the bottom of the setup screens.

The following table provides information concerning the usage of these hot keys.

Table 50: Font Size Table

Hotkeys	Description
<f1></f1>	The <f1> key invokes the General Help window.</f1>
<->	The <minus> key selects the next lower value within a field.</minus>
<+>	The <plus> key selects the next higher value within a field.</plus>
<f2></f2>	The <f2> key loads the previous values.</f2>
<f3></f3>	The <f3> key loads the standard default values.</f3>
<f4></f4>	The <f4> key saves the current settings and exit the uEFI BIOS setup.</f4>
<→> 0r <←>	The <left right=""> arrows selects major setup menus on the menu bar. For example: Main, Advanced, Security, etc.</left>
< ↑ > or < ↓ >	The <up down=""> arrows selects fields in the current menu. For example: A setup function or a sub-screen.</up>
<esc></esc>	The <esc> key exits a major setup menu and enter the Exit setup menu.</esc>
	Pressing the <esc> key in a sub-menu displays the next higher menu level.</esc>
<rerurn></rerurn>	The <return> key executes a command or select a submenu.</return>

#### 9.2. Setup Menus

The Setup utility features shows six menus in the selection bar at the top of the screen:

- Main
- Advanced
- Power
- Boot
- Security
- Save & Exit

The Setup menus are selected via the left and right arrow keys. The currently active menu and the currently active uEFI BIOS Setup item are highlighted in white. Each Setup menu provides two main frames. The left frame displays all available functions. Functions that can be configured are displayed in blue. Functions displayed in gray provide information about the status or the operational configuration. The right frame displays an Item Specific Help window providing an explanation of the respective function.

### 9.2.1. Main Setup Menu

Upon entering the uEFI BIOS Setup program, the Main Setup menu is displayed. This screen lists the Main Setup menu sub-screens and provides basic system information. Additionally functions for setting the system time and date are offered.

Table 51: Main Setup Menu Sub-Screens and Functions

Function	Description
BIOS Information	Read only field.
	Displays information about the system BIOS
Memory Information	Read only field.
	Displays information about total memory
ME Information	Read only field.
	Displays information about Intel Management Engine (ME) version
TXE Information	Read only field.
	Displays information about TXE information
Firmware Information	Code version and firmware information
System Date	Set System Date
System Time	Set System Time

Figure 36: BIOS Main Menu Screen System Data and Time

BIOS SETUP UTILITY						
Main	Advanced	Power	Boot	Security	Save & Exit	
Product Information						
Product Name		mITX-DNV-C3538				
BIOS Version		R0.09 (x64)				
BIOS Build Date		03/12/2018				
ME FW Version		0B:4.0.0.143				
CPU Information						
Intel® Atom™ CPU C35	538 @ 2.10GHz					
Microcode Revision		20h				
Processor Cores		4/4				
				→ ←: Select Screer	1	
Memory Information				↑ ↓: Select Item		
Total Size		8192 MB (DDR4)		Enter: Select		
Frequency		2133 MHz		+/-: Change Opt.		
				F1: General Help		
System Date		[Wed 03/14/2018	]	F2: Previous Values	5	
System Time		[15:50:43]		F3: Optimized Defa	ults	
				F4: Save & Exit		
Access Level		Administrator		ESC: Exit		
Version 2.19.1266. Copyright (C) 2018, American Megatrends, Inc.						

Feature	Option	Description
System Date	[dd/mm/yyyy]	Set the Date. Use Tab to switch between Data elements.
System Time	[hh:mm:ss]	Set the Time. Use Tab to switch between Time elements.

## 9.2.2. Advanced Setup Menu

The Advanced setup menu provides sub-screens and functions for advanced configurations. The following sub-screen functions are included in the menu:

- ► LAN Configuration
- FIA HSI012 Configuration
- CPU Chipset Configuration
- SATA Configuration
- USB Configuration
- Trusted Computing
- Network Stack Configuration
- ▶ DIO Configuration
- Super IO Configuration
- Serial Port Console Redirection
- ► H/W Monitor



Setting items on this screen to incorrect values may cause the system to malfunction.

Figure 37: BIOS Advanced Menu

BIOS SETUP UTILITY							
Main	Advanced	Power	Boot	Security	Save & Exit		
Load Intel I210 UNI	DI	[Disabled]					
Load X553 1GbE UN	NDI	[Disabled]					
> FIA HSIO12 Config	guration						
> CPU Chipset Conf	figuration			→ ←: Select Screen			
> SATA Configuration				↑ ↓: Select Item			
> USB Configuratio	on			Enter: Select			
> Trusted Computi	ng			+/-: Change Opt.			
> Network Stack Co	onfiguration			F1: General Help			
> DIO Configuration	n			F2: Previous Values			
> Super IO Configuration				F3: Optimized Defaults			
> Serial Port Console Redirection				F4: Save & Exit			
> H/W Monitor ESC: Exit							
Version 2.19.1266. Copyright (C) 2018, American Megatrends, Inc.							

Feature	Option	Description
Load Intel I210 UNDI	[Disabled], [Enabled]	Select whether or not to load onboard UNDI (Universal Network Driver Interface) for Intel I210.
Load X553 1GbE UNDI	[Disabled], [Enabled]	Select whether or not to load onboard UNDI (Universal Network Driver Interface) for X553 1GbE.

Figure 38: BIOS Advanced Menu - FIA HSIO12 Configuration

		BIOS SETUP	UTILITY		
Main	Advanced	Power	Boot	Security	Save & Exit
Flexible I/O Adapt	er HSIO12 Configurat	ion			
HSI012 I/O amoun	t	Full Avtive			
Lane 8:PCIE-C6139	O(VGA)	[PCIE Enabled	1]		
Lane18:XHCI		[XHCI Enabled	d]		
Lane 0:PCIE-Soltx	1	[Lane Disable	d]		
Lane12:I210-AT-1		[PCIE Enabled	1]		
Lane14:I210-AT-2		[PCIE Enabled	1]		
Lane10:mPCIE1/m	SATA1	[JP1 with mP0	IE]		
Lane19:M.2 Key-B		[SATA Enable	d]	→ ←: Select Scree	n
Lane 9:SATA1		[SATA Enable	d]	↑ ↓: Select Item	
Lane11:SATA2		[SATA Enable	d]	Enter: Select	
Lane13:SATA3		[SATA Enable	d]	+/-: Change Opt.	
Lane15:SATA4		[SATA Enable	d]	F1: General Help	
Lane16:SATA5		[SATA Enable	d]	F2: Previous Value	25
Lane17:SATA6		[SATA Enable	d]	F3: Optimized Defa	aults
				F4: Save & Exit	
mPCIE1 W-DISABL	E# Pin	[Enabled (Dri	ven High)}	ESC: Exit	
Version 2.19.1266. Copyright (C) 2018, American Megatrends, Inc.					

Feature	Option	Description
Lane 8:PCIE- C6139(VGA)	[Lane Disabled], [PCIE Enable]	Select Lane 8 to work as Disabled or PCIE-C6139(VGA).
Lane18:XHCI	[Lane Disabled], [XHCI Enabled]	Select Lane18 to work as Disabled or XHCI.
Lane 0:PCIE-Soltx1	[Lane Disabled], [PCIE Enabled]	Select Lane 0 to work as Disabled or PCIE-Solt.
Lane12:I210-AT-1 Lane14:I210-AT-2	[Lane Disabled], [PCIE Enabled]	Select Lane12 / Lane14 to work as Disabled or I210-AT-1 / I210-AT-2 respectively.
Lane10:mPCIE1/mSAT A1	[Lane Disabled], [PCIE Enable], [SATA Enable], [JP1 with mPCIE]	Select Lane10 to work as Disabled, mPCIE1 or mSATA1.
Lane19:M.2 Key-B	[Lane Disabled], [SATA Enabled]	Select Lane19 to work as Disabled or M.2 Key-B.
Lane 9:SATA1 Lane11:SATA2 Lane13:SATA3 Lane15:SATA4 Lane16:SATA5 Lane17:SATA6	[Lane Disabled], [SATA Enabled]	Select Lane 9 / Lane11 / Lane13 / Lane15 / Lane16 / Lane17 to work as Disabled or SATA1 / SATA2 / SATA3 / SATA4 / SATA5 / SATA6 respectively.
mPCIE1 W-DISABLE# Pin	[Disabled (Driven Low)], [Enabled	Select to control mPCIE1 W-DISABLE# signal Pin status. This signal is used by the system to control radio operation on add-in

<u>www.kontron.com</u> // 63

Feature	Option	Description
	(Driven High)]	cards that implement radio frequency applications.

Figure 39: BIOS Advanced Menu - CPU Chipset Configuration

	BIOS SETUP UTILITY				
Main	Advanced	Power	Boot	Security	Save & Exit
CPU Chipset Configu	ration				
EIST		[Enabled]			
Turbo Mode		[Enabled]			
CPU C State		[Enabled]		→ ←: Select Scre	en
Active Processor Cor	re e	0		↑ ↓: Select Item	
VMX		[Enabled]		Enter: Select	
VT-d		[Enabled]		+/-: Change Opt.	
VT-d Interrupt rema	pping	[Enabled]		F1: General Help	
Max CPUID Value Lin	nit	[Disabled]		F2: Previous Valu	es
Execute Disable Bit		[Enabled]		F3: Optimized Det	faults
IQAT		[Enabled]		F4: Save & Exit	
Fast Boot		[Enabled]		ESC: Exit	
	Version 2.19.1	266. Copyright (C) 20	018, American Me	egatrends, Inc.	

Feature	Option	Description
EIST	[Disabled], [Enabled]	Select whether to enable or disable Enhanced Intel SpeedStep Technology.
Turbo Mode	[Disabled], [Enabled]	Select whether to enable or disable CPU Turbo capability.
CPU C State	[Disabled], [Enabled]	Select whether to enable or disable the Enhanced Cx state of the CPU.
VMX	[Disabled], [Enabled]	Select whether to enable or disable the Vanderpool Technology.
VT-d	[Disabled], [Enabled]	Select whether to enable or disable VT-d capability.
VT-d Interrupt remapping	[Disabled], [Enabled]	Select whether to enable or disable VT-d Interrupt remapping. If Interrupt Remapping is disabled, the XAPIC mode will be disabled.
Max CPUID Value Limit	[Disabled], [Enabled]	Select whether to limit CPUID maximum value.
Execute Disable Bit	[Disabled], [Enabled]	Select whether to enable or disable Execute Disable Bit functionality, which prevents malicious buffer overflow attacks.
IQAT	[Disabled], [Enabled]	Select whether or not to hide Intel QuickAssist Technology device from an OS.
Fast Boot	[Disabled], [Enabled]	Select whether to enable or disable fast boot which skips memory training and attempts to boot using last known good configuration.

Figure 40: BIOS Advanced Menu - SATA Configuration

BIOS SETUP UTILITY					
Main	Advanced	Power	Boot	Security	Save & Exit
SATA Configuration	1				
SATA Controller 0		[Enabled]			
SATA-0 Port Multip	olier	[Disabled]			
SATA Controller 1		[Enabled]			
SATA-1 Port Multip	lier	[Disabled]			
Serial ATA Port 1		Empty			
SATA1		[Enabled]			
Serial ATA Port 2		Empty			
SATA2		[Enabled]			
Serial ATA Port 3		Empty			
SATA3		[Enabled]			
Serial ATA Port 4		Empty		→ ←: Select Scree	n
SATA4		[Enabled]		↑ ↓: Select Item	
Serial ATA Port 5		Empty		Enter: Select	
SATA5		[Enabled]		+/-: Change Opt.	
Serial ATA Port 6		Empty		F1: General Help	
SATA6		[Enabled]		F2: Previous Value	5
				F3: Optimized Defa	aults
M.2 Key-B		Empty		F4: Save & Exit	
M.2 SATA		[Enabled]		ESC: Exit	
	Version 2.19.1	266. Copyright (C) 20	)18, American Me	gatrends, Inc.	

Feature	Option	Description
SATA Controller 0	[Enabled], [Disabled]	Select whether to enable or disable SATA Controller0 / 1.
SATA Controller 1		
SATA-0 Port	[Enabled], [Disabled]	Select whether to enable or disable SATA Controller 0 / 1 port
Multiplier		multiplier support in CAP register of the controller.
SATA-1 Port Multiplier		
SATA1	[Disabled], [Enabled]	Select whether to enable or disable SATA1 / SATA2 / SATA3 /
SATA2		SATA4 / SATA5 / SATA6 / M.2 SATA respectively.
SATA3		
SATA4		
SATA5		
SATA6		
M.2 SATA		

Figure 41: BIOS Advanced Menu - USB Configuration

	BIOS SETUP UTILITY				
Main	Advanced	Power	Boot	Security	Save & Exit
USB Configuratio	n				
USB Devices:				→ ←: Select Scree	en
1 Keyboard	1 Keyboard, 2 Mice, 2 Hubs				
				Enter: Select	
Legacy USB Supp	oort	[Enabled]		+/-: Change Opt.	
xHCl Hand-off		[Enabled]		F1: General Help	
USB Mass Storag	ge Driver Support	[Enabled]		F2: Previous Valu	es
				F3: Optimized Def	aults
				F4: Save & Exit	
				ESC: Exit	
Version 2.19.1266. Copyright (C) 2018, American Megatrends, Inc.					

Feature	Option	Description
Legacy USB Support	[Enabled], [Disabled], [Auto]	Select whether to enable or disable Legacy USB support. AUTO option disables legacy support if no USB devices are connected.
XHCI Hand-off	[Enabled], [Disabled]	Select whether to enable or disable XHCI Hand-off function. This is a workaround for OSes without XHCI hand-off support. The XHCI ownership change should be claimed by XHCI driver.
USB Mass Storage Driver Support	[Disabled], [Enabled]	Select whether to enable or disable USB Mass Storage Driver Support.

<u>www.kontron.com</u> // 67

Figure 42: BIOS Advanced Menu - Trsted Computing

	BIOS SETUP UTILITY				
Main	Advanced	Power	Boot	Security	Save & Exit
Configuration					
Security Device	e Support	[Disabled]			
NO Security De	evice			→ ←: Select Scre	en
				↑ ↓: Select Item	
				Enter: Select	
				+/-: Change Opt.	
				F1: General Help	
				F2: Previous Valu	es
				F3: Optimized Def	aults
				F4: Save & Exit	
ESC: Exit					
Version 2.19.1266. Copyright (C) 2018, American Megatrends, Inc.					

Feature	Option	Description
Security Device Support	[Disabled], [Enabled]	Select whether to enable or disable BIOS support for security device. O.S. will no show Security Device. TCG EFI protocol and INT1A interface will not be available.

Figure 43: BIOS Advanced Menu - Network Stack Configuration

	BIOS SETUP UTILITY					
Main	Advanced	Power	Boot	Security	Save & Exit	
Network Stack Co	onfiguration					
LAN Boot I210-AT	·-1	[Disabled]		→ ←: Select Scre	en	
LAN Boot I210-AT	-2	[Disabled]		↑ ↓: Select Item		
LAN Boot X553 10	ibE-1	[Disabled]		Enter: Select		
LAN Boot X553 10	ibE-2	[Disabled]		+/-: Change Opt.		
LAN Boot X553 1C	ibE-3	[Disabled]		F1: General Help		
LAN Boot X553 1C	ibE-4	[Disabled]		F2: Previous Valu	es	
				F3: Optimized Det	faults	
Ipv4 PXE Support		[Enabled]		F4: Save & Exit		
Ipv6 PXE Support		[Disabled]		ESC: Exit		
	Version 2.19.1266. Copyright (C) 2018, American Megatrends, Inc.					

Feature	Option	Description
LAN Boot I210-AT-1	[Disabled], [Load PXE]	Select whether to enable or disable load onboard PXE (Preboot
LAN Boot I210-AT-2		Execution Environment) or uEFI-SNP (Simple Network Protocol).
LAN Boot X553 1GbE-1		
LAN Boot X553 1GbE-		
2		
LAN Boot X553 1GbE-		
3		
LAN Boot X553 1GbE-		
4		
Ipv4 PXE Support	[Disabled], [Enabled]	Select whether to enable or disable Ipv4 PXE boot support. If
		disabled, Ipv4 PXE boot support will not be available.
Ipv6 PXE Support	[Disabled], [Enabled]	Select whether to enable or disable Ipv6 PXE boot support. If
		disabled, Ipv6 PXE boot support will not be available.

Figure 44: BIOS Advanced Menu - DIO Configuration

BIOS SETUP UTILITY					
Main	Advanced	Power	Boot	Security	Save & Exit
DIO Configuration					
User Configuration		[Disabled]			
DIO_0*		[Output High]			
DIO_1*		[Output High]			
DIO_2*		[Output High]			
DIO_3*		[Output High]			
DIO_4*		[Output High]			
DIO_5*		[Output High]			
DIO_6*		[Output High]			
DIO_7*		[Output High]			
				→ ←: Select Screen	
DIO_0 Value		1		↑ ↓: Select Item	
DIO_1 Value		1		Enter: Select	
DIO_2 Value		1		+/-: Change Opt.	
DIO_3 Value		1		F1: General Help	
DIO_4 Value		1		F2: Previous Values	
DIO_5 Value		1		F3: Optimized Defa	ılts
DIO_6 Value		1		F4: Save & Exit	
DIO_7 Value		1		ESC: Exit	
Version 2.19.1266. Copyright (C) 2018, American Megatrends, Inc.					

<sup>\*</sup> These items appear only when enbling User Configuration.

Feature	Option	Description
User Configuration	[Enabled], [Disabled]	Select whether or not to allow user to set the DIO pin value.
DIO_07	[Output Low], [Output High], [Input]	Set up the DIO pin value.

Figure 45: BIOS Advanced Menu - Super IO Configuration

	BIOS SETUP UTILITY					
Main	Advanced	Power	Boot	Security	Save & Exit	
Super 10 Configur	ration					
> Serial Port 1 Cor	nfiguration			→ ←: Select Scree	→ ←: Select Screen	
> Serial Port 2 Co	> Serial Port 2 Configuration			↑ ↓: Select Item		
				Enter: Select		
				+/-: Change Opt.		
				F1: General Help		
				F2: Previous Value	25	
				F3: Optimized Def	aults	
				F4: Save & Exit		
				ESC: Exit		
Version 2.19.1266. Copyright (C) 2018, American Megatrends, Inc.						

Figure 46: BIOS Advanced Menu - Super IO Configuration - Serial Port 1 Configuration

BIOS SETUP UTILITY					
Main	Advanced	Power	Boot	Security	Save & Exit
Serial Port 1 Conf	Serial Port 1 Configuration				
Serial Port		[Enabled]		→ ←: Select Scre	en
Device Settings		I0=3F8h; IRQ=4	;	↑ ↓ : Select Item	
				Enter: Select	
Change Setting		[Auto]		+/-: Change Opt.	
Serial Port 1 Type		[RS232]		F1: General Help	
RS485 Deplux I	Mode*	[Half Duplex]		F2: Previous Valu	es
RS485 Auto Flo	w Control	[Disabled]		F3: Optimized Def	faults
				F4: Save & Exit	
ESC: Exit					
Version 2.19.1266. Copyright (C) 2018, American Megatrends, Inc.					

<sup>\*</sup> These items appear only when selecting RS485 for the Serial Port 1 Type.

Feature	Option	Description
Serial Port	[Disabled], [Enabled]	Select whether to enable or disable Serial Port (COM).
Change Settings	[Auto], [IO=3F8h; IRQ=4;], [IO=3F8h; IRQ=3, 4, 5, 6, 7, 9, 10, 11, 12;], [IO=2F8h; IRQ=3, 4, 5, 6, 7, 9, 10, 11, 12;], [IO=3E8h; IRQ=3, 4, 5, 6, 7, 9, 10, 11, 12;], [IO=2E8h; IRQ=3, 4, 5, 6, 7, 9, 10, 11, 12;]	Select an optional setting for Super IO device.

Feature	Option	Description
Serial Port 1 Type	[RS232], [RS422], [RS485]	Select an appropriate type for Serial Port 1.
RS485 Duplex Mode	[Half Duplex], [Full Duplex]	Select an appropriate RS485 Duplex Mode.
RS485 Auto Flow Control	[Disabled], [Enabled]	Select whether to enable or disable RS485 Auto Flow Control.

Figure 47: BIOS Advanced Menu - Super IO Configuration - Serial Port 2 Configuration

BIOS SETUP UTILITY						
Main	Advanced	Power	Boot	Security	Save & Exit	
Serial Port 2 Conf	Serial Port 2 Configuration					
Serial Port		[Enabled]	[Enabled]		→ ←: Select Screen	
Device Settings		IO=2F8h; IRQ=3;		↑ ↓: Select Item		
				Enter: Select		
Change Setting		[Auto]		+/-: Change Opt.		
Serial Port 2 Type	2	[RS232]		F1: General Help		
RS485 Deplux N	Mode*	[Half Duplex]		F2: Previous Value	25	
RS485 Auto Flo	w Control	[Disabled]		F3: Optimized Defa	aults	
				F4: Save & Exit		
	ESC: Exit					
Version 2.19.1266. Copyright (C) 2018, American Megatrends, Inc.						

<sup>\*</sup> These items appear only when selecting RS485 for the Serial Port 2 Type.

Feature	Option	Description
Serial Port	[Disabled], [Enabled]	Select whether to enable or disable Serial Port (COM).
Change Settings	[Auto], [IO=2F8h; IRQ=3;], [IO=3F8h; IRQ=3, 4, 5, 6, 7, 9, 10, 11, 12;], [IO=2F8h; IRQ=3, 4, 5, 6, 7, 9, 10, 11, 12;], [IO=3E8h; IRQ=3, 4, 5, 6, 7, 9, 10, 11, 12;], [IO=2E8h; IRQ=3, 4, 5, 6, 7, 9, 10, 11, 12;]	Select an optional setting for Super IO device.
Serial Port 2 Type	[RS232], [RS422], [RS485]	Select an appropriate type for Serial Port 2.
RS485 Duplex Mode	[Half Duplex], [Full Duplex]	Select an appropriate RS485 Duplex Mode.
RS485 Auto Flow Control	[Disabled], [Enabled]	Select whether to enable or disable RS485 Auto Flow Control.

Figure 48: BIOS Advanced Menu - Serial Port Console Redirection

BIOS SETUP UTILITY						
Main	Advanced	Power	Boot	Security	Save & Exit	
COM1						
Console Redirect	ion	[Disabled]				
> Console Redired	ction Settings					
COM2						
Console Redirect	ion	[Disabled]				
> Console Redirection Settings				→ ←: Select Screen		
				↑ ↓ : Select Item		
Legacy Console F	Redirection			Enter: Select		
> Legacy Console	Redirection Settings			+/-: Change Opt.		
				F1: General Help		
	t-of-Band Manageme	ent / Windows Emer	gency	F2: Previous Valu	es	
Management Ser	vices (EMS)			F3: Optimized Def	aults	
Console Redirect	ion	[Disabled]		F4: Save & Exit		
> Console Redirection Settings ESC: Exit						
Version 2.19.1266. Copyright (C) 2018, American Megatrends, Inc.						

Feature Option		Description		
Console Redirection	[Disabled], [Enabled]	Select whether to enable or disable console redirection.		

Figure 49: BIOS Advanced Menu - Serial Port Console Redirection - COM1 / COM2 Console Redirection Settings

BIOS SETUP UTILITY						
Main /	Advanced	Power	Boot	Security	Save & Exit	
COM1						
Console Redirection Settings						
Terminal Type		[ANSI]				
Bits per second		[115200]	[115200]		→ ←: Select Screen	
Data Bits		[8]	[8]		↑ ↓: Select Item	
Parity		[None]	[None]		Enter: Select	
Stop Bits		[1]	[1]		+/-: Change Opt.	
Flow Control		[None]	[None]		F1: General Help	
VT-UTF8 Combo Key Su	ıpport	[Enabled]	[Enabled]		F2: Previous Values	
Recorder Mode		[Disabled]	[Disabled]		F3: Optimized Defaults	
Resolution 100x31 [Disabled] F4: Save & Exit						
Putty KeyPad [VT100] ESC: Exit						
Version 2.19.1266. Copyright (C) 2018, American Megatrends, Inc.						

Feature	Option	Description
Terminal Type	[VT100], [VT100+], [VT-UTF8], [ANSI]	Determine the terminal type.
Bits per second	[9600], [19200], [38400], [57600], [115200]	Select serial port transmission speed. The speed must be matched on the other side. Long or noisy lines may require lower speeds.
Data Bits	[7], [8]	Determine the data bits.
Parity	[None], [Even], [Odd], [Mark], [Space]	A parity bit can be sent with the data bits to detect some transmission errors.
Stop Bits	[1], [2]	Stop bits indicate the end of a serial data packet (A start bit indicates the beginning.). The standard setting is 1 stop bit.  Communication with slow devices may require more than 1 stop bit.
Flow Control	[None], [Hardware RTS/CTS]	Flow control can prevent data loss from buffer overflow. When sending data, if the receiving buffers are full, a 'stop' signal can be sent to stop the data flow. You may select "None" or "Hardware RTS/CTS" depending on the circumstances.
VT-UTF8 Combo Key Support	[Disabled], [Enabled]	Select whether to enable or disable VT-UTF8 Combination Key Support for ANSI/VT100 terminals.
Recorder Mode	[Disabled], [Enabled]	Select whether to enable or disable recorder mode. With this mode enabled, only text will be sent. This is to capture terminal data.
Resolution 100x31	[Disabled], [Enabled]	Select whether to enable or disable extended terminal resolution.
Putty KeyPad	[VT100], [LINUX], [XTERMR6], [SC0], [ESCN], [VT400]	Select FunctionKey and KeyPad on Putty.

Figure 50: BIOS Advanced Menu - Serial Port Console Redirection - Legacy Console Redirection Settings

BIOS SETUP UTILITY								
Main	Advanced	Power	Boot	Security	Save & Exit			
Legacy Console F	Legacy Console Redirection Settings							
Redirection COM	Port	[COM1]		→ ←: Select Scre	en			
Resolution		[80x24]		↑ ↓: Select Item				
Redirect After PC	OST	[BootLoader]		Enter: Select				
				+/-: Change Opt.				
				F1: General Help				
				F2: Previous Valu	es			
				F3: Optimized Def	aults			
				F4: Save & Exit				
	ESC: Exit							
	Version 2.19.1266. Copyright (C) 2018, American Megatrends, Inc.							

Feature	Option	Description
Redirection COM Port	[COM1], [COM2]	Select a COM port to display redirection of Legacy OS abd Legacy OPROM Messages.
Resolution	[80x24], [80x25]	Select the number of rows and columns supported redirection on legacy OS.
Redirect After POST	[Always Enabled], [BootLoader]	When BootLoader is selected, legacy console redirection is disabled before booting to legacy OS. When Always Enabled is selected, legacy console redirection is enabled for legacy OS.

Figure 51: BIOS Advanced Menu - Serial Port Console Redirection - Out-of-Band Mgmt Port Console Redirection Settings

BIOS SETUP UTILITY						
Main	Advanced	Power	Boot	Security	Save & Exit	
Out-of-Band Mgr	mt Port	[COM1]				
Terminal Type		[VT-UTF8]				
Bits per second		[115200]		→ ←: Select Scre	en	
Flow Control		[None]		↑ ↓: Select Item		
Data Bits		8	Enter: Select			
Parity		None		+/-: Change Opt.		
Stop Bits		1		F1: General Help		
				F2: Previous Valu	es	
				F3: Optimized Def	aults	
				F4: Save & Exit		
ESC: Exit						
	Version 2.19.1266. Copyright (C) 2018, American Megatrends, Inc.					

Feature	Option	Description
Out-of-Band Mgmt Port	[COM1], [COM2]	Select a COM port for Out-of-Band Management Port. Microsoft Windows Emergency Management Services (EMS) allows remote management of a Windows Server OS through a serial port.
Terminal Type	[VT100], [VT100+], [VT-UTF8], [ANSI]	Determine the terminal type. VT-UTF8 is the preferred terminal type for out-of-band management. The next best choice is VT100+ and then VT100.
Bits per second	[9600], [19200], [57600], [115200]	Select serial port transmission speed. The speed must be matched on the other side. Long or noisy lines may require lower speeds.
Flow Control	[None], [Hardware RTS/CTS], [Software Xon/Xoff]	Flow control can prevent data loss from buffer overflow. When sending data, if the receiving buffers are full, a 'stop' signal can be sent to stop the data flow. You may select "None", "Hardware RTS/CTS" or "Software Xon/Xoff" depending on the circumstances.

Figure 52: BIOS Advanced Menu - H/W Monitor

BIOS SETUP UTILITY								
Main	Advanced	Power	Boot	Security	Save & Exit			
PC Health Status								
> Smart FAN Conf	iguration							
CPU Temperature	-DTS	: +31 C						
CPU Temperature	-Diode	: +31 C						
System Temperat	ture	: +34 C						
CPU Fan Speed		: 5818 RPM		→ ←: Select Screer	1			
SYS Fan Speed		: N/A	: N/A		↑ ↓: Select Item			
				Enter: Select				
+VCORE		: +1.021 V		+/-: Change Opt.				
+12V		: +11.956 V		F1: General Help				
+5V		: +5.146 V		F2: Previous Values	5			
+VMEM		: +1.221 V		F3: Optimized Defa	ults			
+3.3V		: +3.392 V		F4: Save & Exit				
+VRTC		: +3.184 V		ESC: Exit				
	Version 2.19.1266. Copyright (C) 2018, American Megatrends, Inc.							

BIOS SETUP UTILITY								
Main	Advanced	Power	Boot	Security	Save & Exit			
Smart FAN Config	uration							
CPU FAN Setting		[Manual]		→ ←: Select Scree	en			
Manual Duty		255		↑ ↓: Select Item				
				Enter: Select				
System FAN Settin	ng	[Manual]		+/-: Change Opt.				
Manual Duty		255		F1: General Help				
				F2: Previous Values				
				F3: Optimized Def	aults			
				F4: Save & Exit				
	ESC: Exit							
	Version 2.19.12	Version 2.19.1266. Copyright (C) 2018, American Megatrends, Inc.						

Feature	Option	Description
CPU FAN Setting	[Manual], [Smart]	Switch the CPU FAN control mode.
System FAN Setting		

# 9.2.3. Power Setup Menu

The Power setup menu provides functions and a sub-screen for power configurations. The following sub-screen function is included in the menu:

WatchDog Timer Configuration

Figure 53: BIOS Power Setup Menu

	BIOS SETUP UTILITY					
Main	Advanced	Power	Boot	Security	Save & Exit	
Power Configurat	ion					
Restore AC Power	rLoss	[Power Off]				
Power Saving Mo	de	[Disabled]				
Resume Event Co	ntrol			→ ←: Select Screen		
Resume By X553	1GbE-1	[Disabled]	[Disabled] ↑ ↓: Select Item			
Resume By X553	1GbE-2	[Disabled]	[Disabled] Enter: Select			
Resume By X553	1GbE-3	[Disabled]	[Disabled]		+/-: Change Opt.	
Resume By X553	1GbE-4	[Disabled]		F1: General Help		
Resume By LAN I	210-AT-1	[Disabled]		F2: Previous Values		
Resume By LAN I210-AT-2		[Disabled]		F3: Optimized Defaults		
Resume By RTC A	Resume By RTC Alarm [Disabled] F4: Save & Exit					
> WatchDog Timer Configuration ESC: Exit						
Version 2.19.1266. Copyright (C) 2018, American Megatrends, Inc.						

Feature	Option	Description
Restore AC Power Loss	[Power Off], [Power On], [Last State]	Control whether the system will stay on after AC power is removed and then restored.
		Select [Power Off] if you want the system to remain off after power restored.
		Select [Power On] if you use a power strip to turn the system on.
Power Saving Mode	[Disabled], [EUP AUX Power], [EUP SOC Power]	Select whether to enable Power Saving Mode.
Resume By X553 1GbE-1/2/3/4	[Disabled], [OS- Driver], [FW-	Select whether to enable or disable Wake from LAN Device X553 NIC with Marvell 88E1543 Port 1/2/3/4 or Intel I210-AT Port 1/2
Resume By I210-AT- 1/2	MagicPacket]	respectively.
Resume By RTC Alarm	[Disabled], [Enabled]	Select whether to enable or disable Wake Up on Alarm, to turn on your system on a special day of the month.

Figure 54: BIOS Power Setup Menu - WatchDog Timer Configuration

BIOS SETUP UTILITY					
Main	Advanced	Power	Boot	Security	Save & Exit
WatchDog Timer (	Configuration				
WDT Function		[Disabled]		→ ←: Select Scree	en
				↑ ↓: Select Item	
				Enter: Select	
				+/-: Change Opt.	
				F1: General Help	
				F2: Previous Valu	25
				F3: Optimized Def	aults
				F4: Save & Exit	
				ESC: Exit	
Version 2.19.1266. Copyright (C) 2018, American Megatrends, Inc.					

Feature	Option	Description
WDT Function	[Disabled], [Enabled]	Select whether to enable or disable WatchDog Timer function.

# 9.2.4. Boot Setup Menu

The boot setup menu lists the for boot device priority order, that is generated dynamically.

Figure 55: BIOS Boot Setup Menu

BIOS SETUP UTILITY						
Main	Advanced	Power	Boot	Security	Save & Exit	
Boot Configuration	n					
Full Screen LOGO	Display	[Disabled]	[Disabled]			
Setup Prompt Tin	neout	1		→ ←: Select Scree	→ ←: Select Screen	
Bootup NumLock State		[On]		↑ ↓: Select Item		
				Enter: Select		
CSM Support		[Enabled]	[Enabled]		+/-: Change Opt.	
Boot Option Filter		[UEFI and Lega	acy]	F1: General Help		
Load build-in Shell		[Enabled]		F2: Previous Value	es	
File System Drivers		[Enabled]	[Enabled]		F3: Optimized Defaults	
				F4: Save & Exit		
Boot Option Prior	ities			ESC: Exit		
Version 2.19.1266. Copyright (C) 2018, American Megatrends, Inc.						

Feature	Option	Description
Full Screen LOGO Display	[Disabled], [Enabled]	Select whether to enable or disable to display logo screen.
Bootup NumLock State	[On], [Off]	Select the state of the NumLock feature of the keyboard after Startup.  [On]: The keys on the keypad will act as numeric keys.  [Off]: The keys on the keypad will act as cursor keys.
CSM Support	[Enabled]	Select whether to enable or disable CSM support.
Boot Option Filter	[UEFI and Legacy], [Legacy only], [UEFI only]	Control Legacy / UEFI ROMs priority.
Load build-in Shell	[Enabled], [Disabled]	It controls installation of the boot option for a built-in shell.
File System Drivers	[Enabled], [Disabled]	Free Software URFI File System Drivers, such as a read-only NTFS or exFAT EFI drivers, courtesy of the GRUB project.

## 9.2.5. Security Setup Menu

The Security setup menu provides information about the passwords and functions for specifying the security settings. The passwords are case-sensitive. The mITX-DNV provides no factory-set passwords.

## NOTICE

If there is already a password installed, the system asks for this first. To clear a password, simply enter nothing and acknowledge by pressing <RETURN>. To set a password, enter it twice and acknowledge by pressing <RETURN>.

Figure 56: BIOS Boot Setup Menu

	BIOS SETUP UTILITY					
Main	Advanced	Power	Boot	Security	Save & Exit	
Password Descrip	otion					
	nistrator's password		y limits access to			
	asked for when enter					
	s password is set, the	•	•			
Administrator rigi	to boot or enter Setup	o. In Setup the Usei	will have			
		Having range				
The password ter	ngth must be in the fo	ttowing range:		→ ←: Select Scree	n	
Minimum Length		3		↑ ↓: Select Item		
Maximum length		20		Enter: Select		
			+/-: Change Opt.			
Administrator Pas	ssword			F1: General Help		
User Password		F2: Previous Values				
		F3: Optimized Defa	aults			
Secure Boot menu		F4: Save & Exit				
				ESC: Exit		
Version 2.19.1266. Copyright (C) 2018, American Megatrends, Inc.						

Feature	Description
Administrator Password	Set administrator password
User Password	Set user password



If only the administrator's password is set, then only access to setup is limited. The password is only entered when entering setup.

If only the user's password is set, then the password is a power on password and must be entered to boot or enter setup. Within the setup menu the user has administrator rights.

Password length requirements are maximum 20 characters and minimum 3 characters.

## 9.2.5.1. Remember the password

It is highly recommended to keep a record of all passwords in a safe place. Forgotten passwords results in being locked out of the system.

If the system cannot be booted because the User Password or the Supervisor Password are not know, contact Kontron Support for further assistance.



HDD security passwords cannot be cleared using the above method.

# 9.2.6. Save & Exit Setup Menu

The exit setup menu provides functions for handling changes made to the UEFI BIOS settings and the exiting of the setup program.

Figure 57: BIOS Boot Setup Menu

BIOS SETUP UTILITY					
Main	Advanced	Power	Boot	Security	Save & Exit
Save Changes and	d Reset				
Discard Changes	and Reset				
				→ ←: Select Scre	en
Save Options	Save Options ↑ ↓: Select Item				
Save Changes	Save Changes Enter: Select				
Discard Changes				+/-: Change Opt.	
				F1: General Help	
Restore Defaults				F2: Previous Valu	es
				F3: Optimized Det	faults
				F4: Save & Exit	
				ESC: Exit	
Version 2.19.1266. Copyright (C) 2018, American Megatrends, Inc.					

Feature	Description
Save Changes and Exit	Exit system setup after saving the changes. Once you are finished making your selections, choose this option from the Exit menu to ensure the values you selected are saved to the CMOS RAM. The CMOS RAM is sustained by an onboard backup battery and stays on even when the PC is turned off. When you select this option, a confirmation window appears. Select [Yes] to save changes and exit.
Discard Changes and Exit	Exit system setup without saving any changes. Select this option only if you do not want to save the changes that you made to the Setup program. If you made changes to fields other than system date, system time, and password, the BIOS asks for a confirmation before exiting.
Save Changes	Save changes done so far to any of the setup values. This option allows you to save the selections you made. After selecting this option, a confirmation appears. Select [Yes] to save any changes.
Discard Changes	Discards changes done so far to any of the setup values. This option allows you to discard the selections you made and restore the previously saved values. After selecting this option, a confirmation appears. Select [Yes] to discard any changes and load the previously saved values.
Restore Defaults	Restore Default values for all the setup values. This option allows you to load optimal default values for each of the parameters on the Setup menus, which will provide the best performance settings for your system. The F9 key can be used for this operation.

# Appendix A: List of Acronyms



The following table does not contain the complete acronyms used in signal names, signal type definitions or similar. A description of the signals is included in the I/O Connector and Internal connector chapters within this user guide.

### Table 52: List of Acronyms

2D	Two-Dimensional
3D	Three-Dimensional
AHCI	Advanced Host Controller Interface
AMT	Active Management Technology
AT	Advanced Technology
ATX	Advanced Technology eXtended
BGA	Ball Grid Array
BIOS	Basic Input / Output System
BSP	Board Support Package
CMOS	Complementary Metal Oxide Semiconductor
СРИ	Central Processing Unit
DC	Direct Current
DDC	Display Data Channel
DIO	Digital Input / Output
DP	DisplayPort
ECC	Error-Correcting Code
ECX	Embedded Compact eXtended
EEE	Electrical and Electronic Equipment
EIST	Enhanced Intel SpeedStep Technology
EOS	Electrical OverStress
ESD	ElectroStatic Discharge
GbE	Gigabit Ethernet
HDD	Hard Disk Drive
HDMI	High Definition Multimedia Interface
LAN	Local Area Network
LED	Light Emitting Device
LVDS	Low-Voltage Differential Signaling
ME F/W	Management Engine Firmware
mPCle	mini Peripheral Component Interconnect express
NGFF	Next Generation Form Factor

PC-AT	Personal Computer - Advanced Technology
PCB	Printed Circuit Board
PSU	Power Supply Unit
PVC	PolyViny Chloride
PWM	Pulse Width Modulation
RAM	Random Access Memory
ROM	Read-Only Memory
RTC	Real-Time Clock
SATA	Serial Advanced Technology Attachment
SD	Secure Digital memory card
SDP	Serial Download Protocol
SELV	Safety Extra-Low Voltage
SIM	Subscriber Identity Module
SMBus	System Management Bus
SoC	System on Chip
SO-DIMM	Small Outline Dual In-line Memory Module
SPD	Serial Presence Detect
SPI	Serial Peripheral Interface
TDP	Thermal Design Power
TPM	Trusted Platform Module
UEFI	Unified Extensible Firmware Interface
USB	Universal Serial Bus
UTP	Update Transfer Protocol
VGA	Video Graphics Array
WDT	WatchDog Timer
WEEE	Waste Electrical and Electronic Equipment



### **About Kontron**

Kontron is a global leader in embedded computing technology (ECT). As a part of technology group S&T, Kontron offers a combined portfolio of secure hardware, middleware and services for Internet of Things (IoT) and Industry 4.0 applications. With its standard products and tailor-made solutions based on highly reliable state-of-the-art embedded technologies, Kontron provides secure and innovative applications for a variety of industries. As a result, customers benefit from accelerated time-to-market, reduced total cost of ownership, product longevity and the best fully integrated applications overall. Kontron is a listed company. Its shares are traded in the Prime Standard segment of the Frankfurt Stock Exchange and on other exchanges under the symbol "KBC". For more information, please visit: www.kontron.com



#### **CORPORATE OFFICES**

# EUROPE, MIDDLE EAST & AFRICA

Lise-Meitner-Str. 3-5 86156 Augsburg Germany Tel.: + 49 821 4086-0 Fax: + 49 821 4086-111 info@kontron.com

#### **NORTH AMERICA**

San Diego, CA 92121 USA Tel.: +1888 294 4558 Fax: +1858 677 0898 info@us.kontron.com

9477 Waples Street

#### **ASIA PACIFIC**

1~2F, 10 Building, No. 8 Liangshuihe 2nd Street, Economical & Technological Development Zone, Beijing, 100176, P.R. China Tel.: +86 10 63751188 Fax: +86 10 83682438 info@kontron.cn