

VME 4U

FEATURES

- EMC integrated system in 19" rack mount
- Card depth 160mm for 6U cards
- Ventilation front, via card cage to rear
- Integrated LED for output voltages
- 7 slot backplane
- Power supplies 450W
- On / off-switch on the front
- Two front handles
- One fan in a pluggable 4 U cassette (front side)
- VME Monolithic Classic, 7 slot 6 U 160mm I/O sockets



Dimension: Height: 4 U
 Width: 84 HP
 Depth: 371 mm

ORDERCODE-INSERT APPROPRIATE DIGIT

		I/O configuration
484 - 07450V	[]	2 80mm (J1 / J2)
		3 100mm (J1 / J2)
		4 120mm (J1 / J2)
		5 140mm (J1 / J2)
		6 160mm (J1 / J2) - Standard for VME


AVAILABLE SLOTS

VME Monolithic	30510-207-0000
No. of slot	7

MECHANICAL DESIGN

SPECIFICATIONS


FRONT VIEW

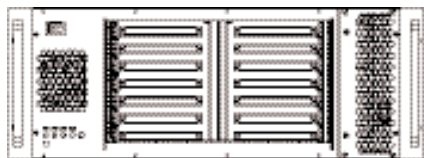

SIDE VIEW (AIR FLOW)



REAR VIEW

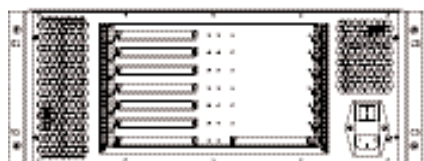

FAN

- Mode	permanent
- Dimension	135 x 135 x 38mm
- Nominal voltage	12 V
- Input power	9,5 W
- Air flow, free air	250,00 m ³ /h
- Noise	48 dB

POWER SUPPLY 450W

- Output power	450 W
- Output Voltages	5V/60A; 12V/5A;-12V/2A
- Input voltage	100-240 VAC
- Frequency	50 - 60 Hz
- RFI, EMI	EN55022 Class B (conducted)
- Approvals	UL, CSA,EN, CE EN61000-3-2 (PFC)


SCOPE OF SUPPLY

High quality 19" rackmount chassis platform consisting of chromated aluminium enclosures, high performance Monolithic VME backplane, power supply, cooling system and AC/DC power components. Assembled, wired and tested prior to shipment.

Please note: custom configurations possible.

VME system 4U 84HP 7slot 450W
 Order No. 484-07450Vx

Front view

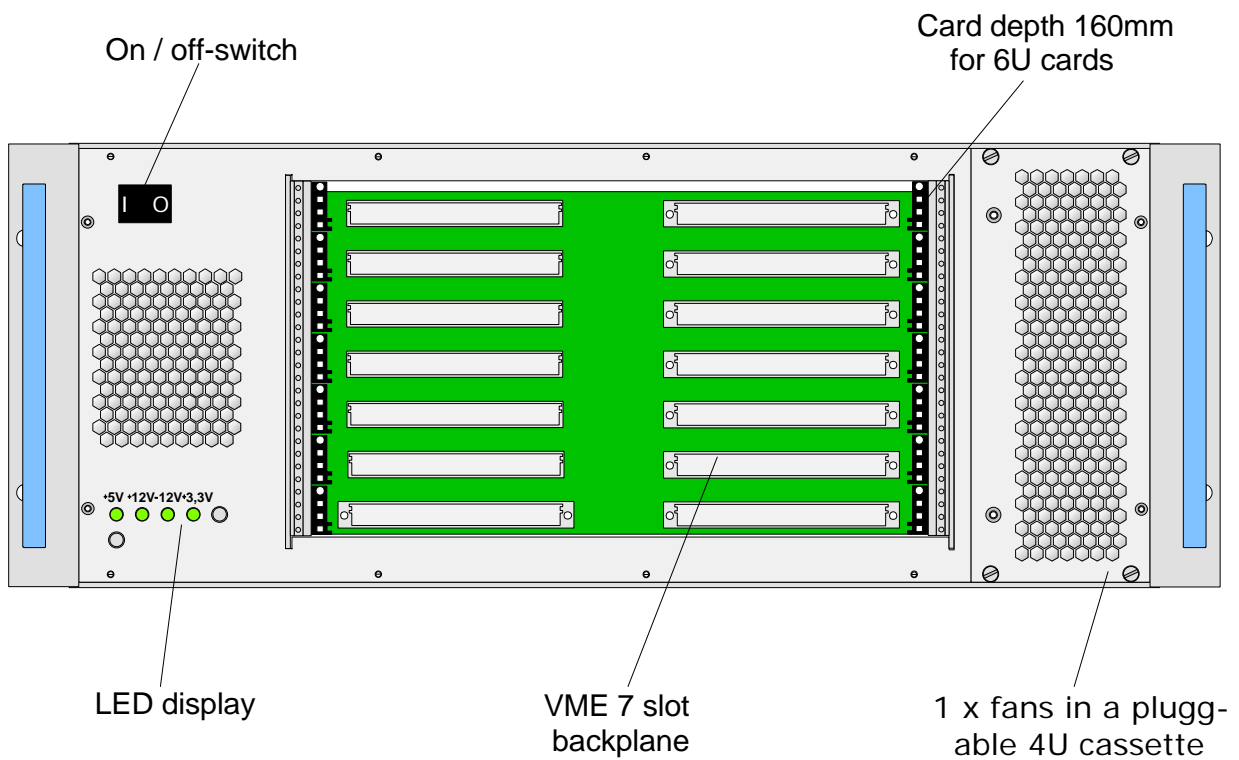

484-07 450 V

- 2 80mm (J1/J2)
- 3 100mm (J1/J2)
- 4 120mm (J1/J2)
- 5 140mm (J1/J2)
- 6 160mm (J1/J2) - Standard for VME

Dimension:
 Height: 4 U
 Width: 84 HP
 Depth: 371 mm